


FX ACOUSTICS INC.



HEAR THE DIFFERENCE

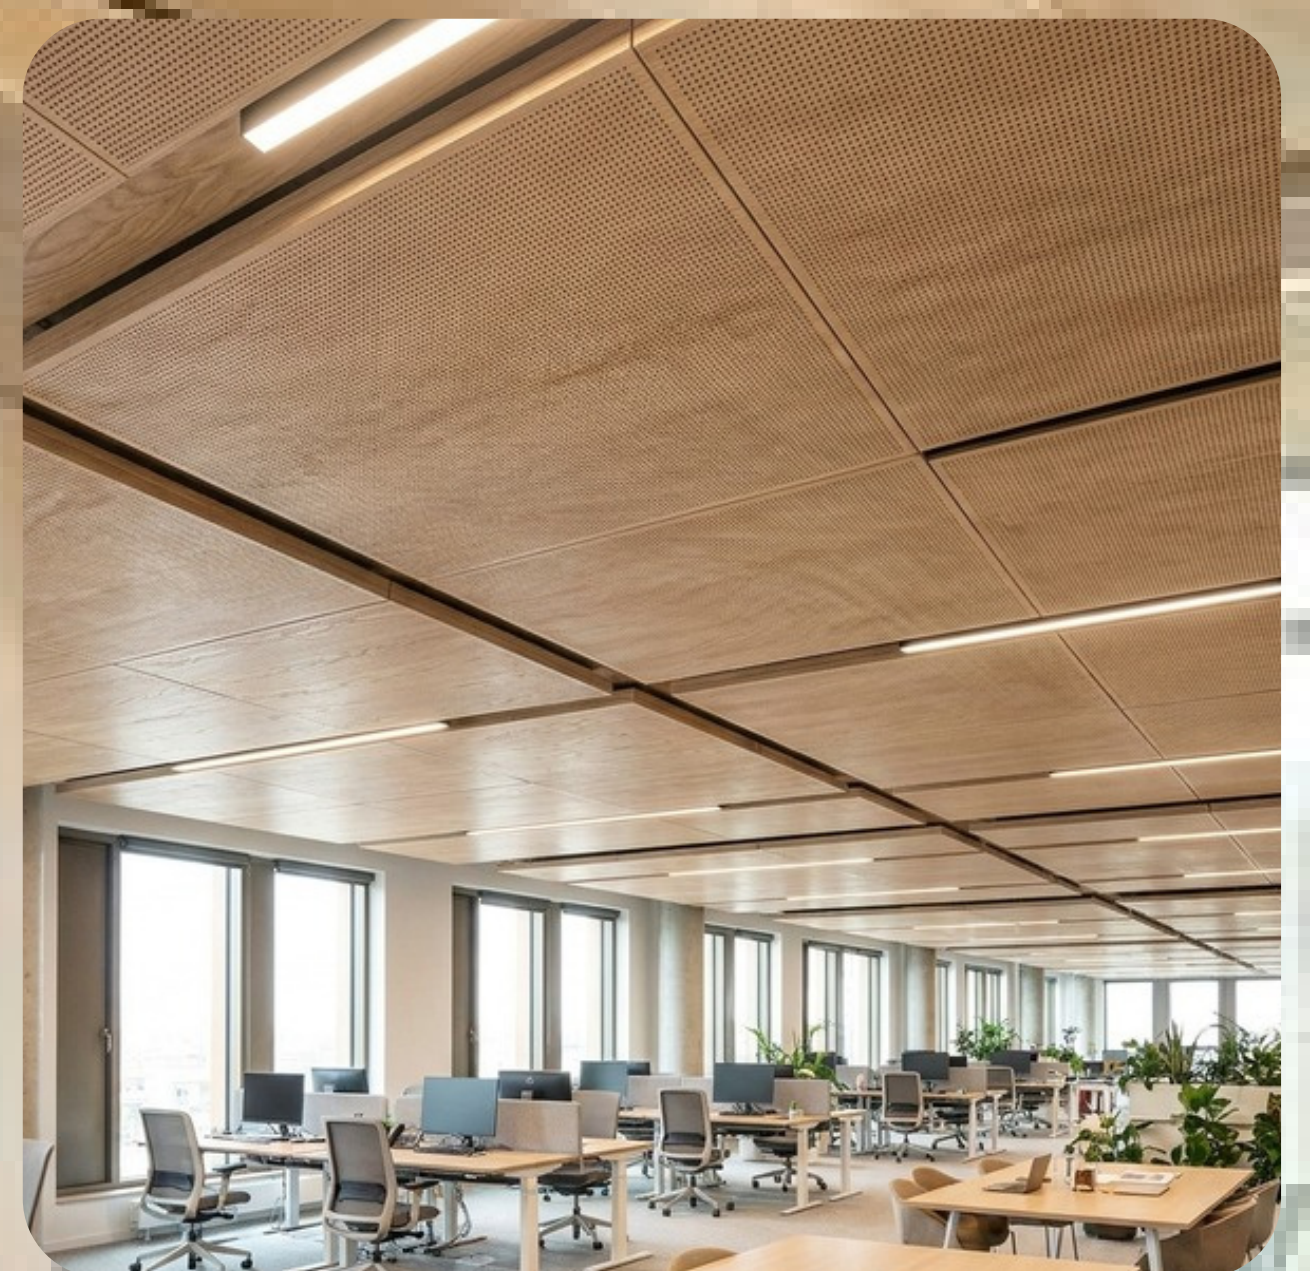

WWW.ACOUSTICSFX.COM



ACOUSTICS



About FX Acoustics Inc.

COMPANY BACKGROUND

FX Acoustics was founded with a singular vision: to create high-quality, decorative acoustical solutions that marry functionality with aesthetics. Since our inception, we have been dedicated to enhancing the acoustic environments of various spaces, from commercial offices and recording studios to homes and public venues. Our commitment to craftsmanship, innovation, and customer satisfaction has driven our growth and established FX Acoustics as a trusted name in the industry. We take pride in our roots and are continually inspired by the communities we serve.

WWW.ACOUSTICSFX.COM



Applications



OFFICES
Workplaces that work better

EDUCATION
Create spaces to inspire

RETAIL
shaping the retail experience

LEISURE & HOSPITALITY
Make yourself at home

HEALTHCARE
Creating spaces for healing


AIRPORT
Products that enhance sound quality, reduce echo, and create a more comfortable atmosphere for travelers and staff

TRANSPORT
Architecture that moves people



AcoPerfTM

Perforated Acoustical Panel

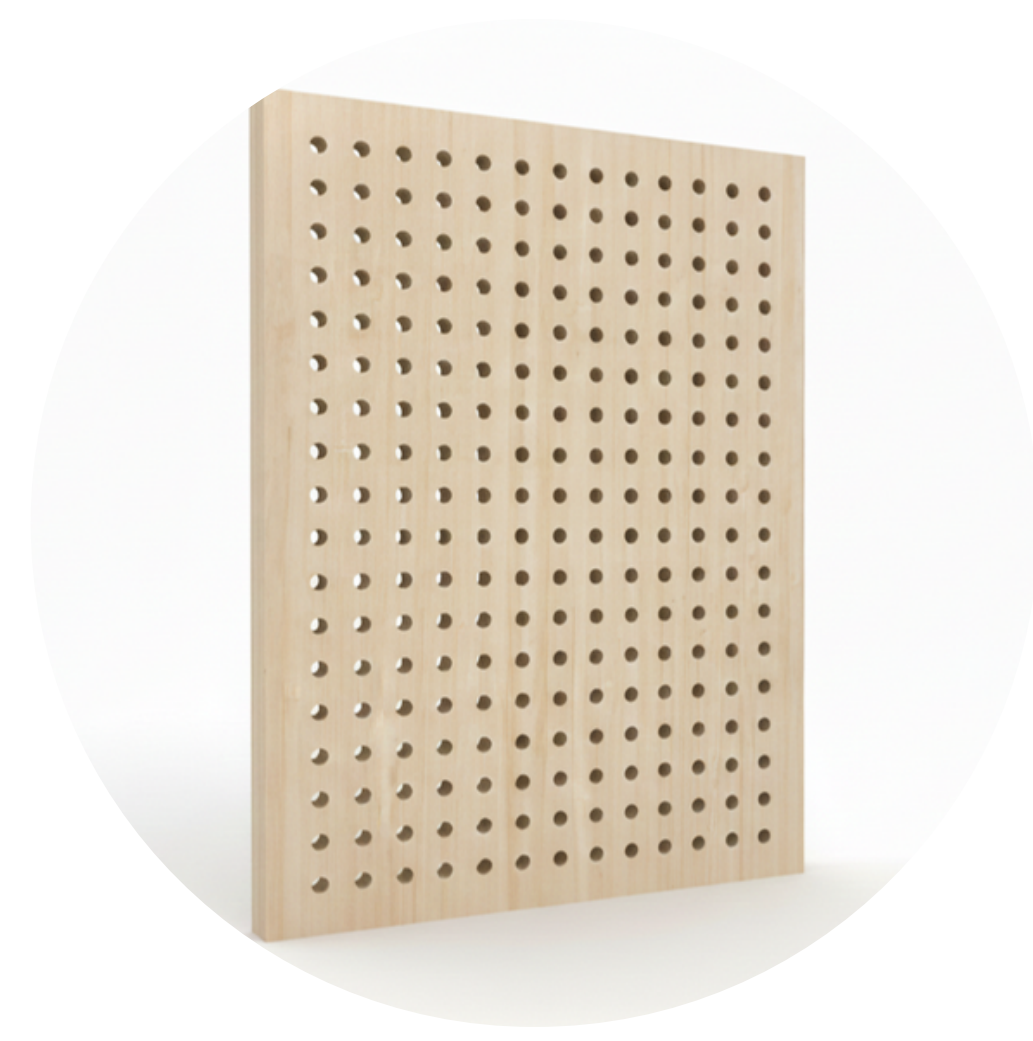


Perforated panels are the most cost-effective approach to obtain a high-absorption acoustic treatment. Different amounts of absorption and aesthetic effects may be produced using a variety of designs and hole sizes.


Benefits

- Improved Acoustics
- Realistic Wood visuals
- Enhanced Acoustical properties with 'Helmholtz Resonator'
- Better concealed system with vector edge
- 15mm tile for better sag resistance and flatness
- PVC Edge banding for moisture resistance and aesthetics

Application Areas

- Lobbies
- Reception Areas
- Retail Spaces
- Cafeterias
- Conference Areas
- Closed Offices

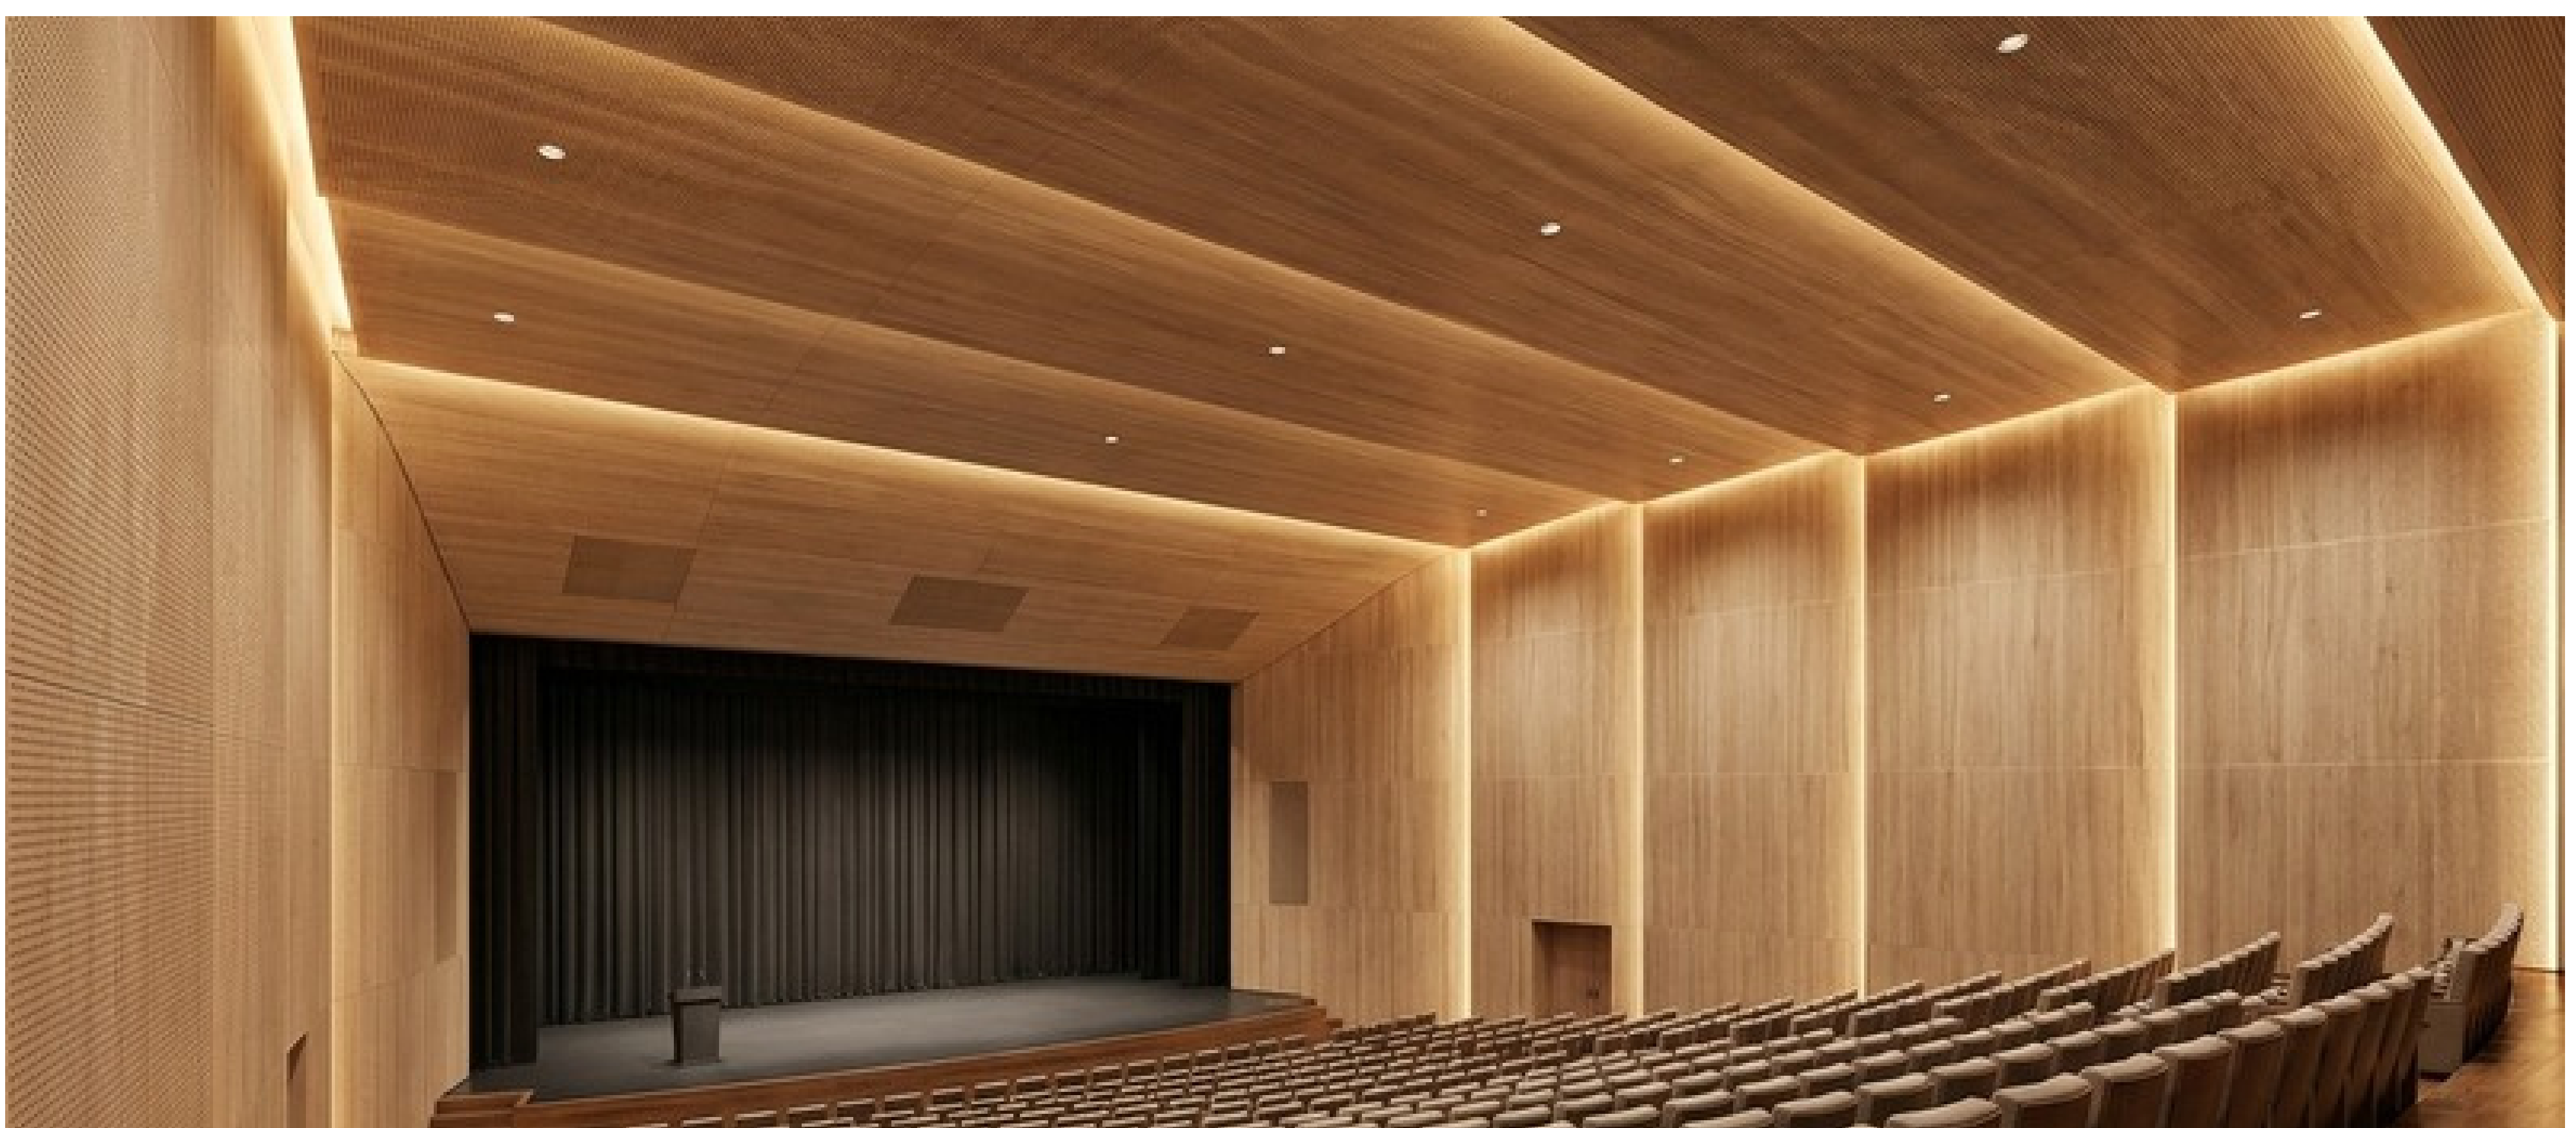


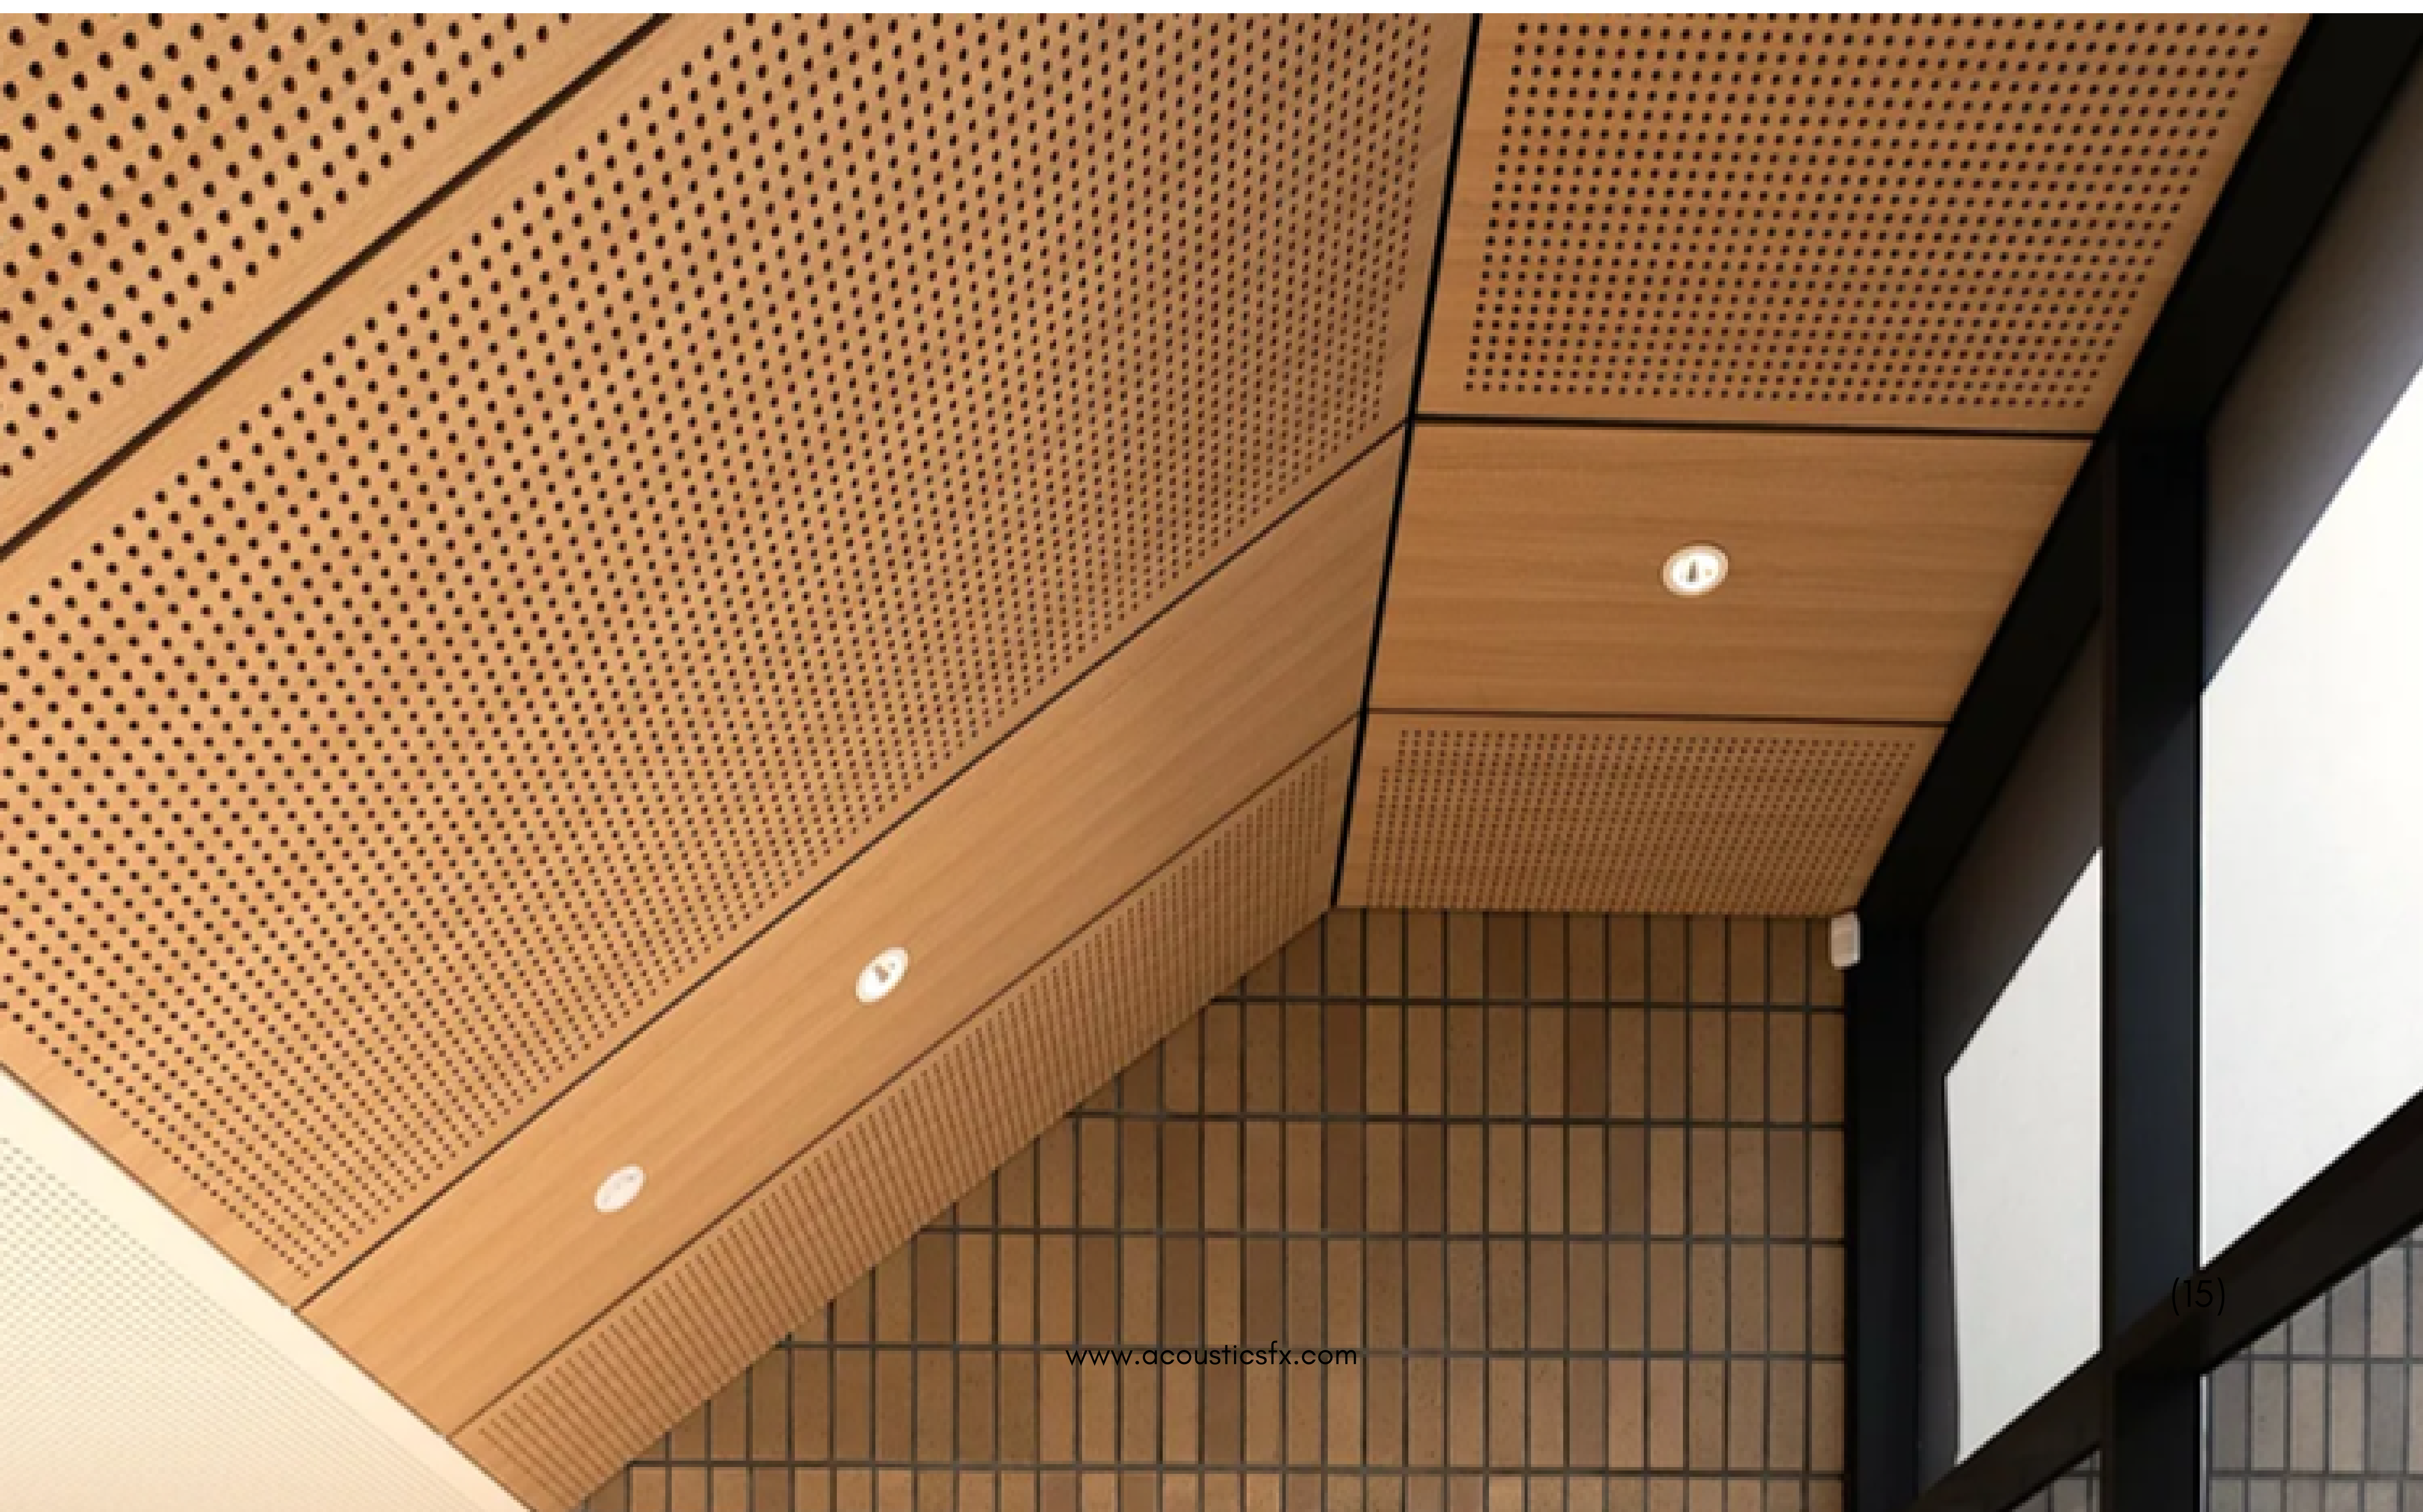




Choose a Profile

Wall System

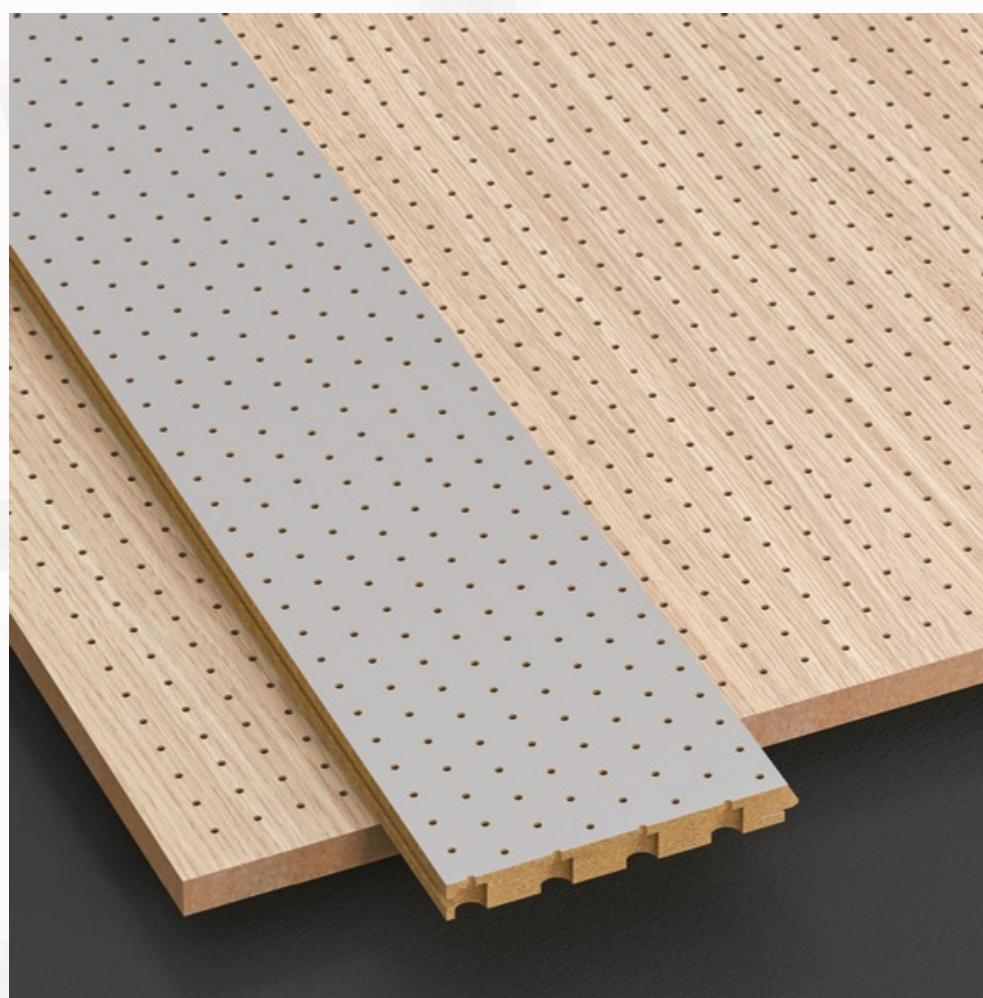


Hole diameter	6/8mm
Thickness	16mm
Nrc.	0.91
Edge	Tounge and groove
Size	15X128X2400mm

Ceiling System

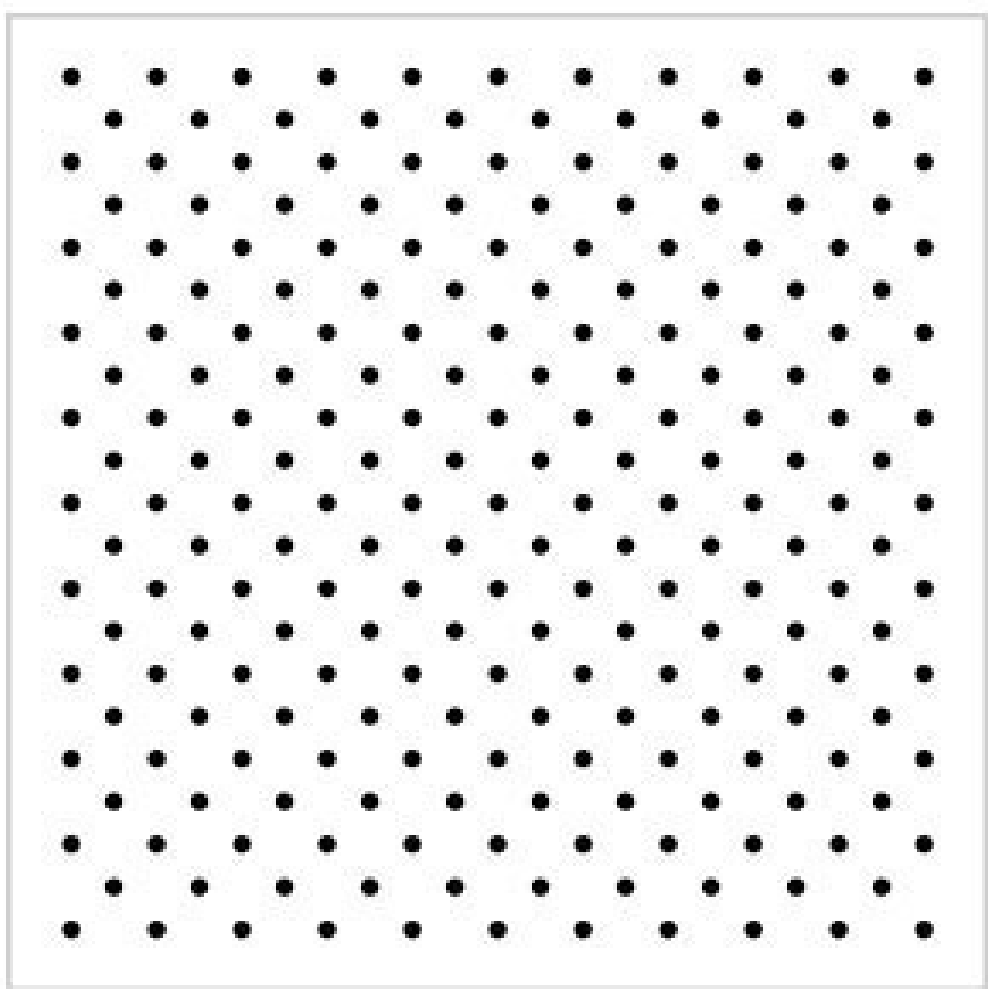

Hole diameter	6/8/10mm
Spacing	12.5X12.5 aligned
Thickness	11/15mm
Type	A
Nrc.	0.87
Size	600X600, 600X1200, 300X1200

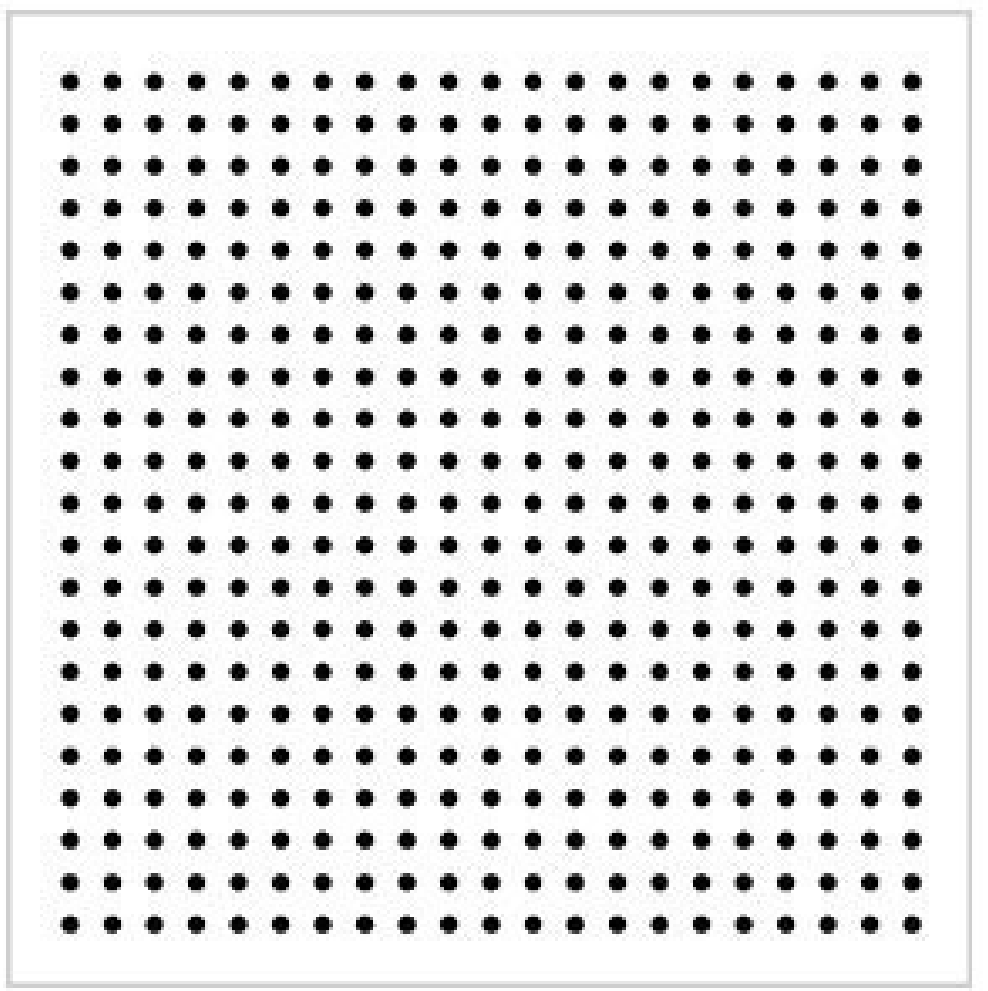

Hole diameter	6/8/10mm
Spacing	12.5X12.5 aligned
Thickness	11/15mm
Type	B
Nrc.	0.82
Size	600X600, 600X1200, 300X1200





AcoPerf™

Perforated Acoustical Panel

System Description

Perforated panels are the most economical way to get an acoustic treatment with a high degree of absorption. With several variations of patterns and hole diameters, different levels of absorption and aesthetic results can be achieved.

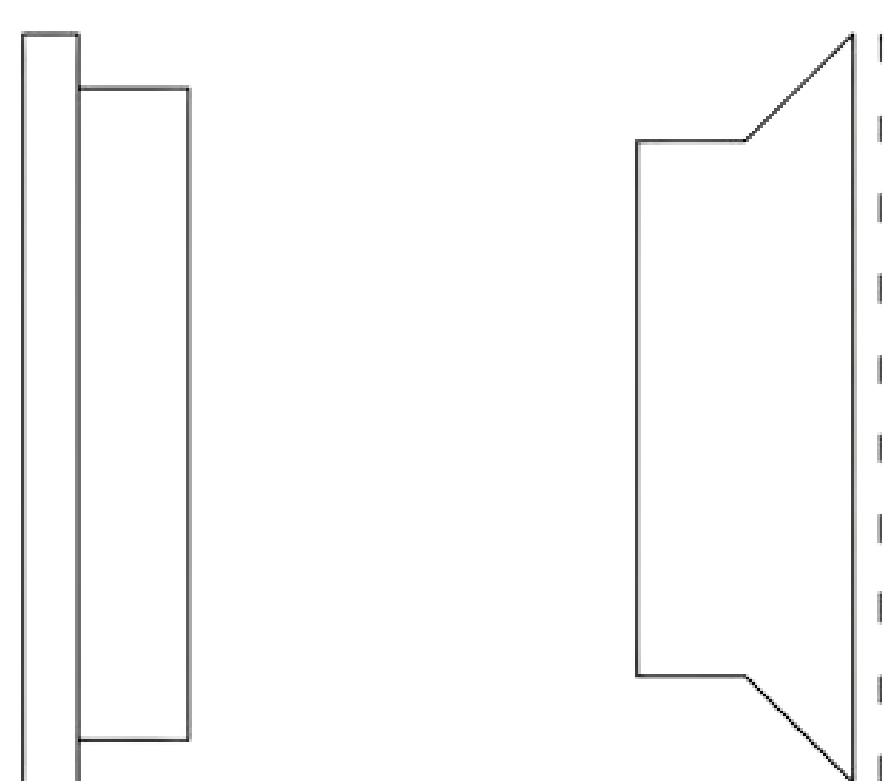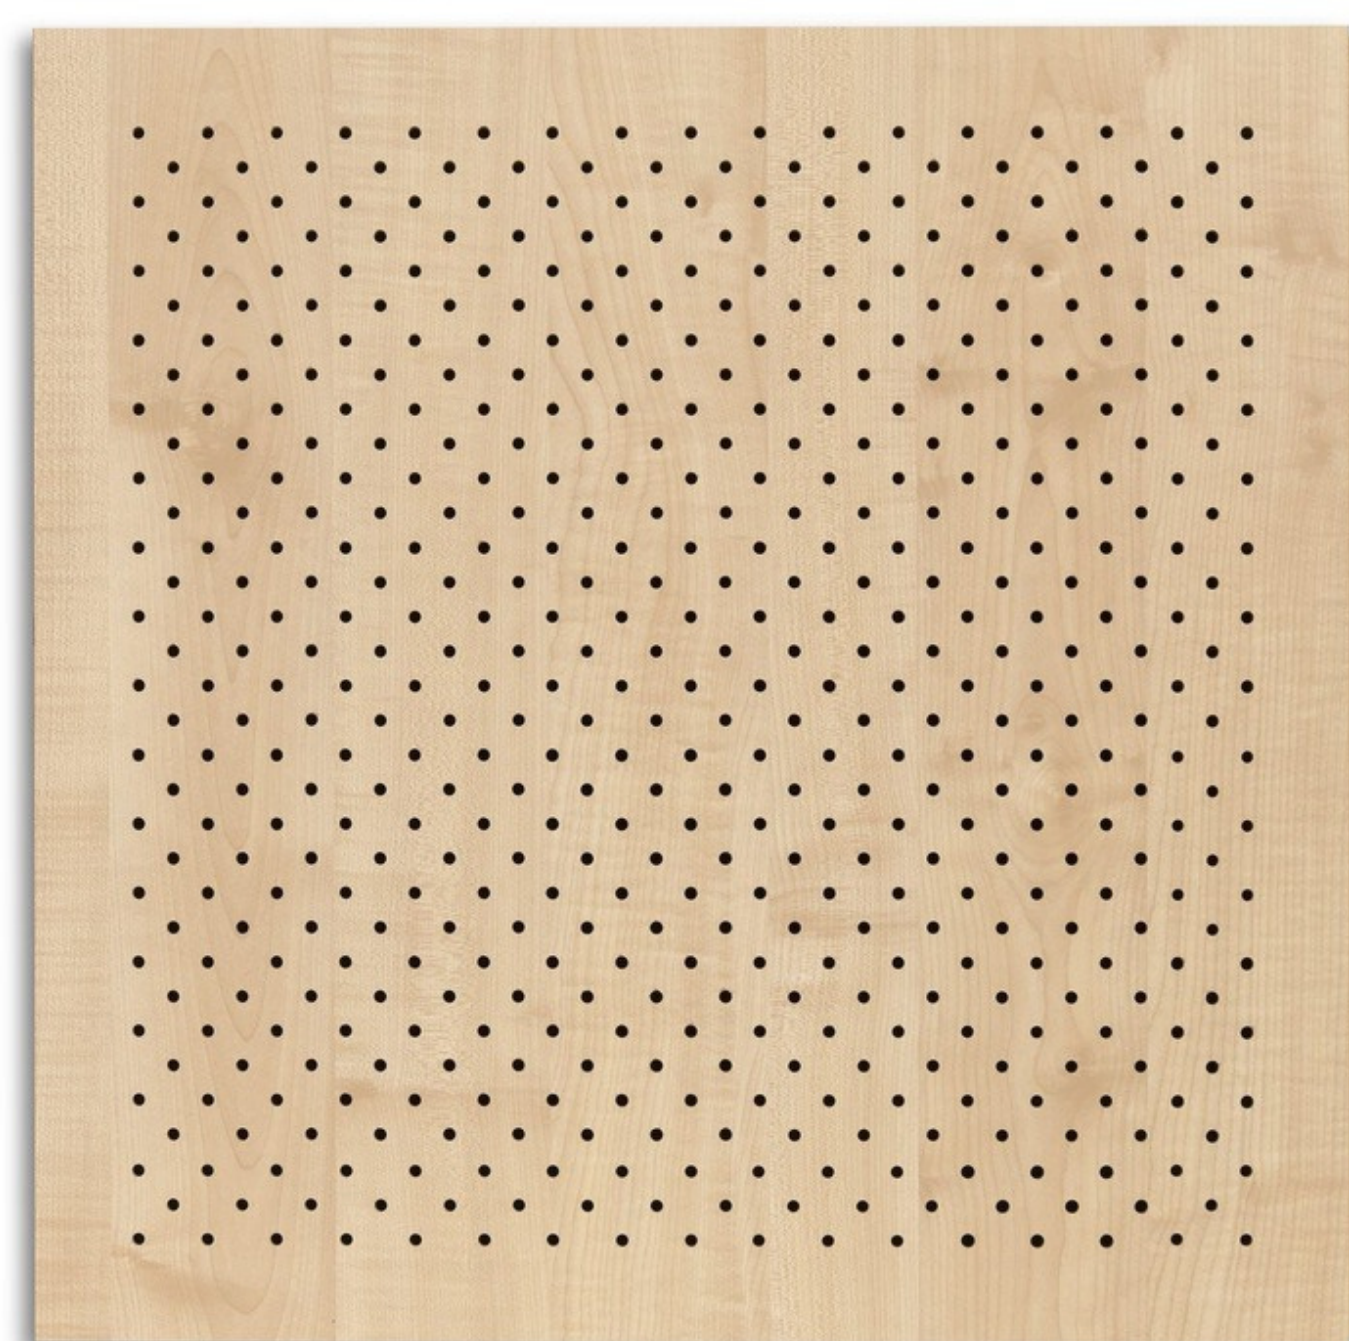

Support Material & Finishes

The support material is always MDF fiberboard wood panels, in standar and fireproof versions. Surface finishes can be raw, melamine, plywood, varnished or lacquered. Other options available on request.

Available Shades



Maple

FX31078



Sea Beech

FX31128




Ivory coast

FX31148



Classic Walnut

FX31228

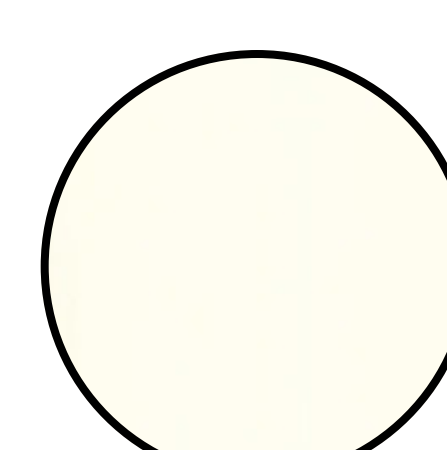

white Pine


FX1058

- Due to printing limitations, the actual product color may differ slightly from what is shown.
- Color variations may occur between different batches.




Installation Manual


Wall and Ceiling Application

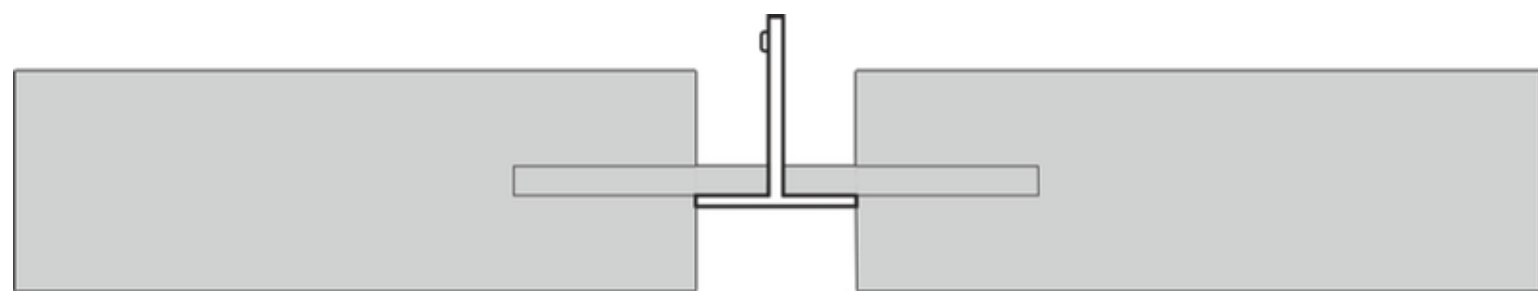



Suprafine 43

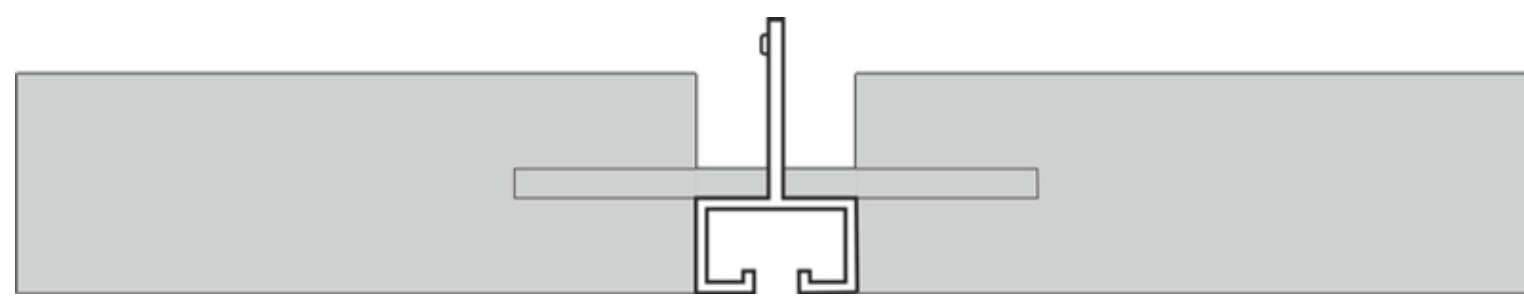

Silhouette 45

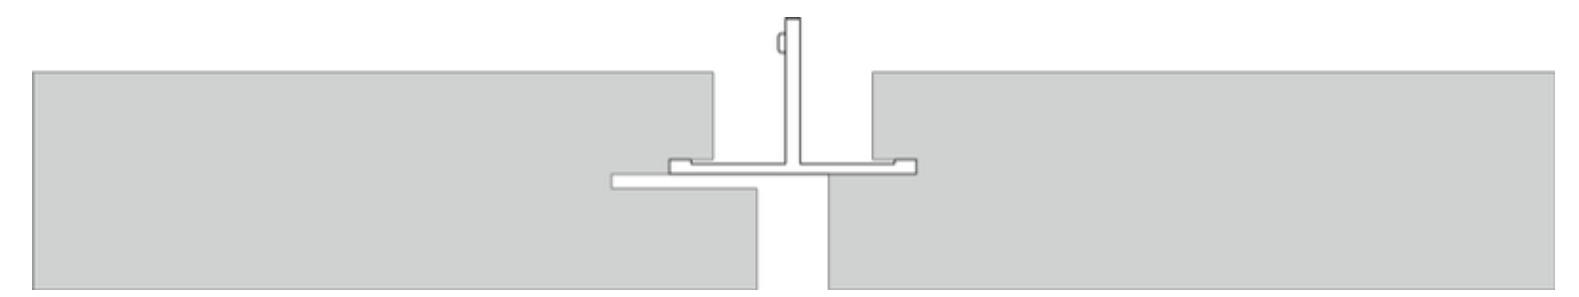


Prelude 43

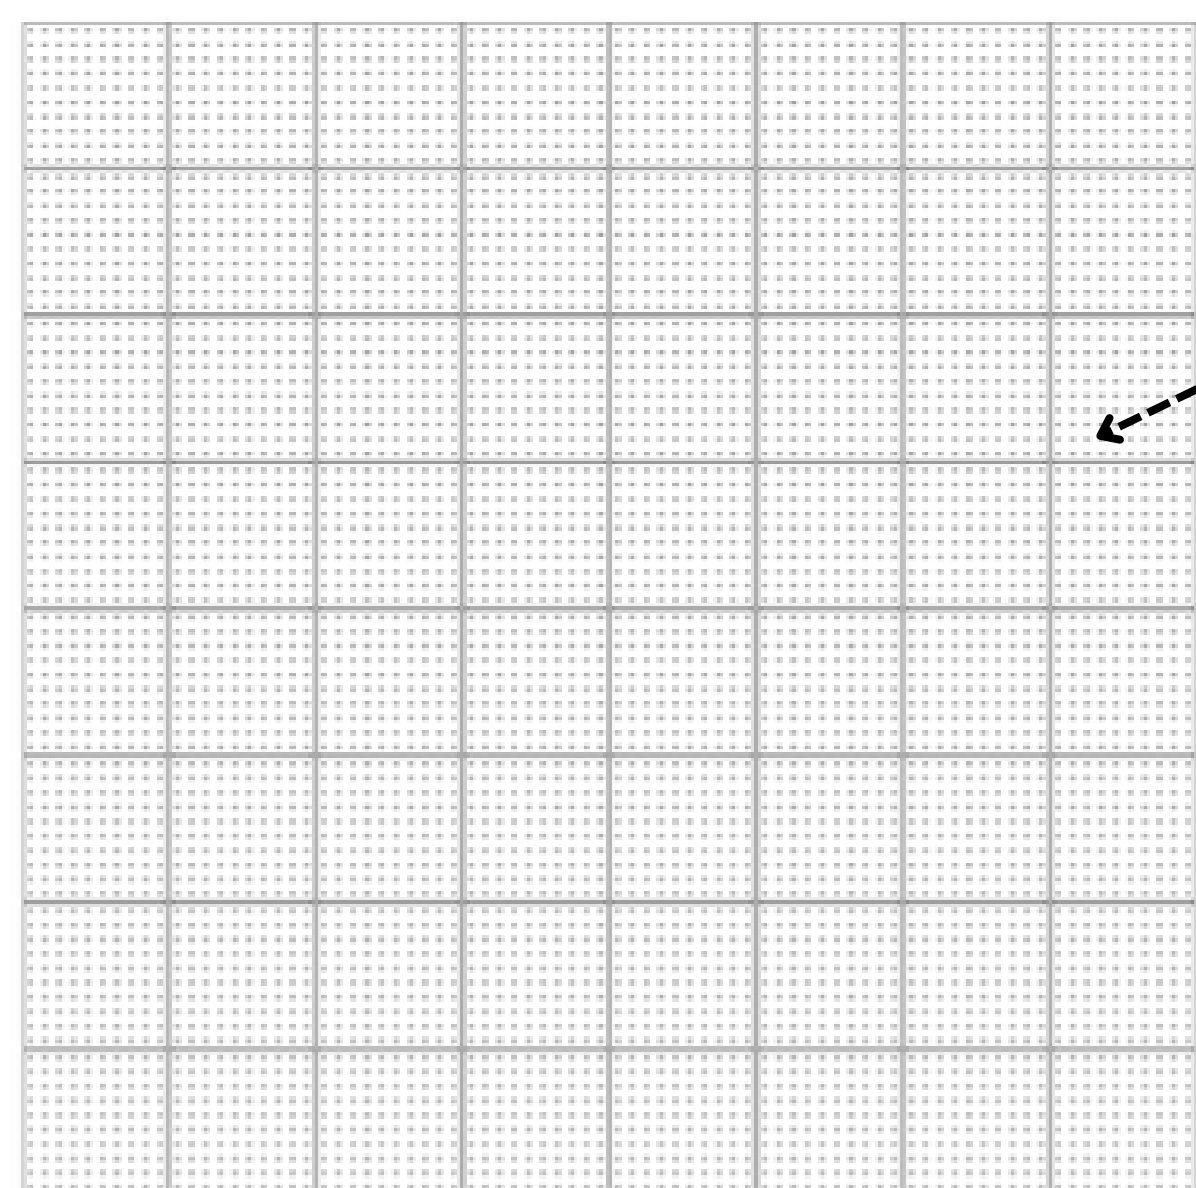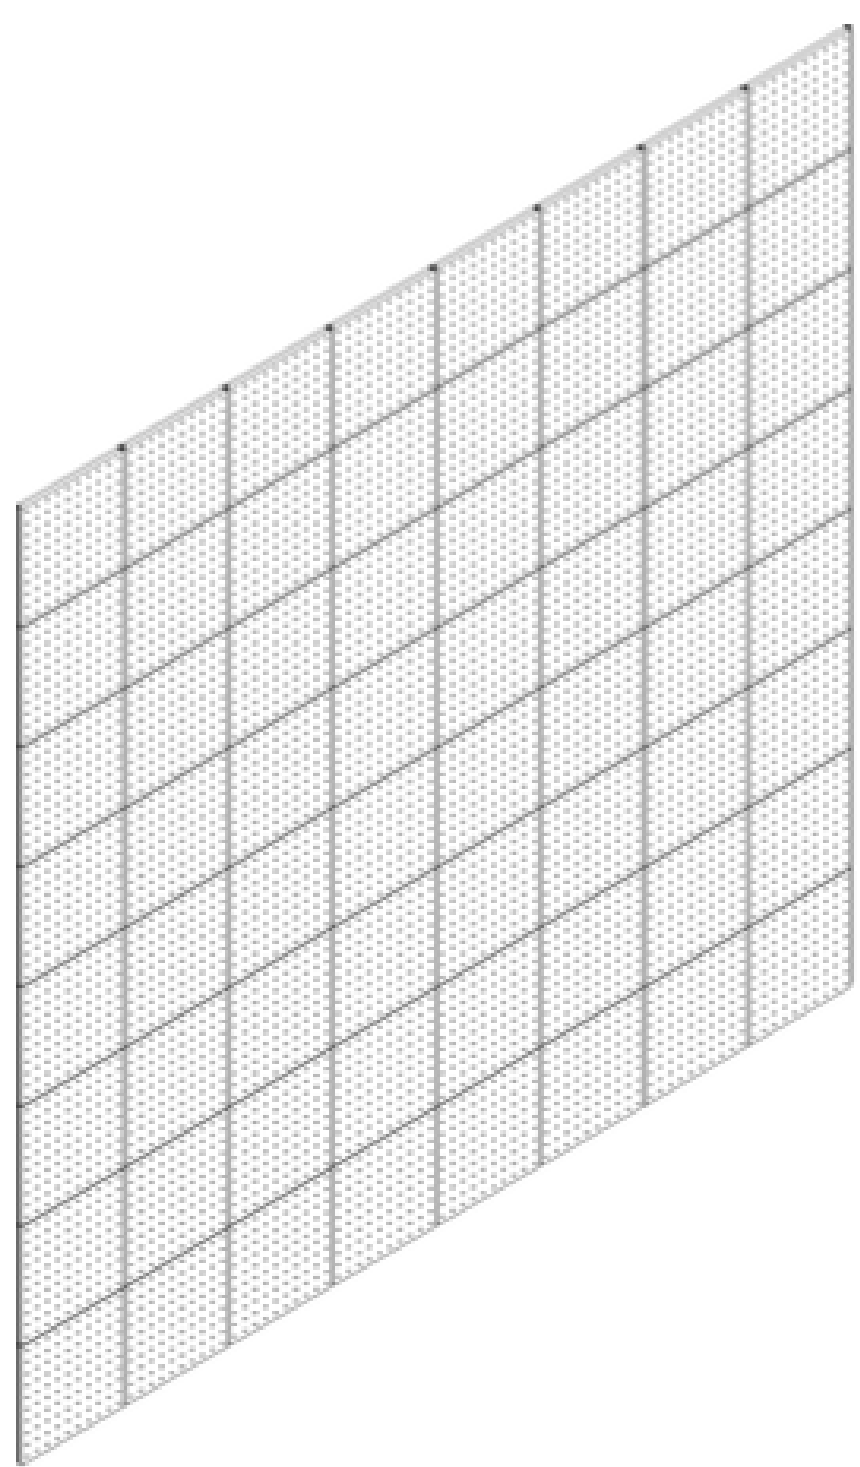

Front View

FX Acoerf Tile

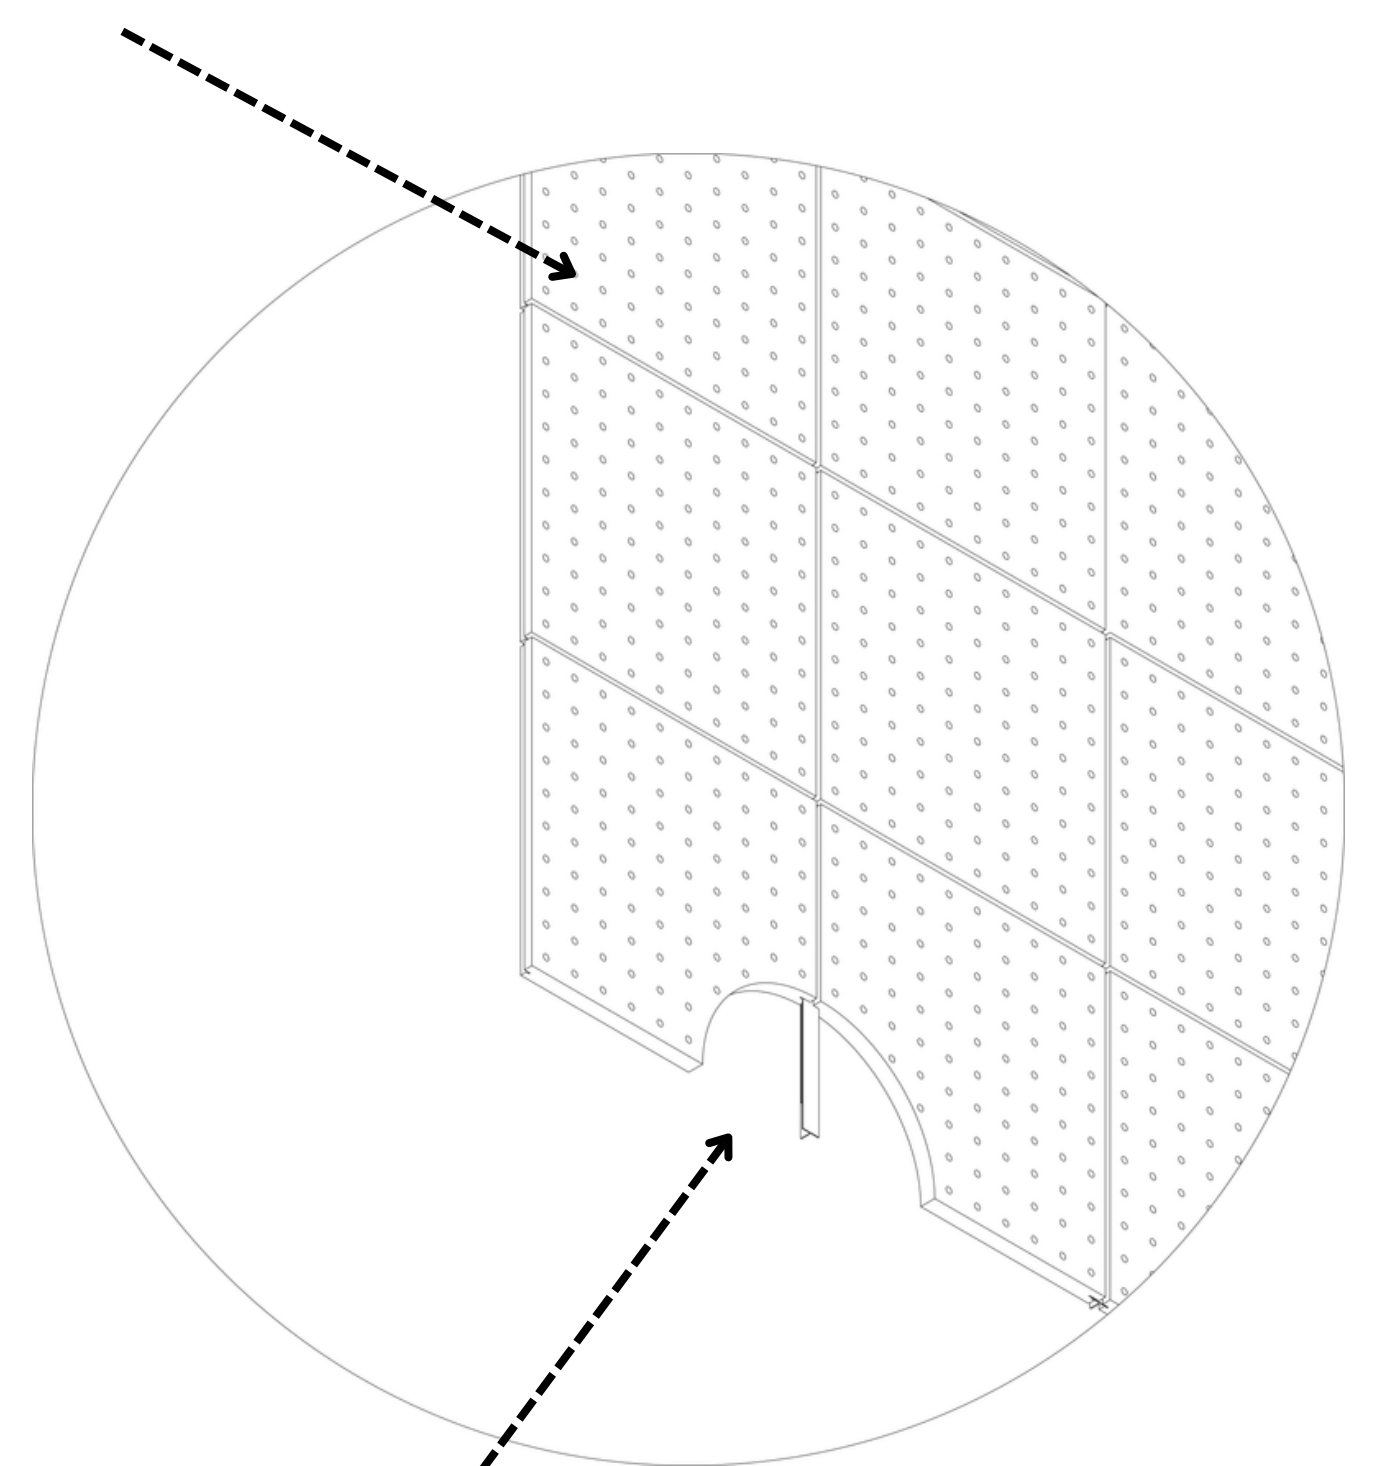

**Furring Channel
ceiling Framing**


Framing:

- **Wall and Ceiling Furring Channel Framing by Others:** This implies that the furring channels (structural components that provide support for mounting panels) are installed by third-party contractors or builders, not part of your team's service.
- **Recommended Furring Channels at 400mm Centers:** The furring channels should be spaced 400mm apart from center to center. This spacing is a common recommendation for providing enough support for acoustical panels while ensuring proper load distribution.



Installation Manual

Wall and Ceiling Application

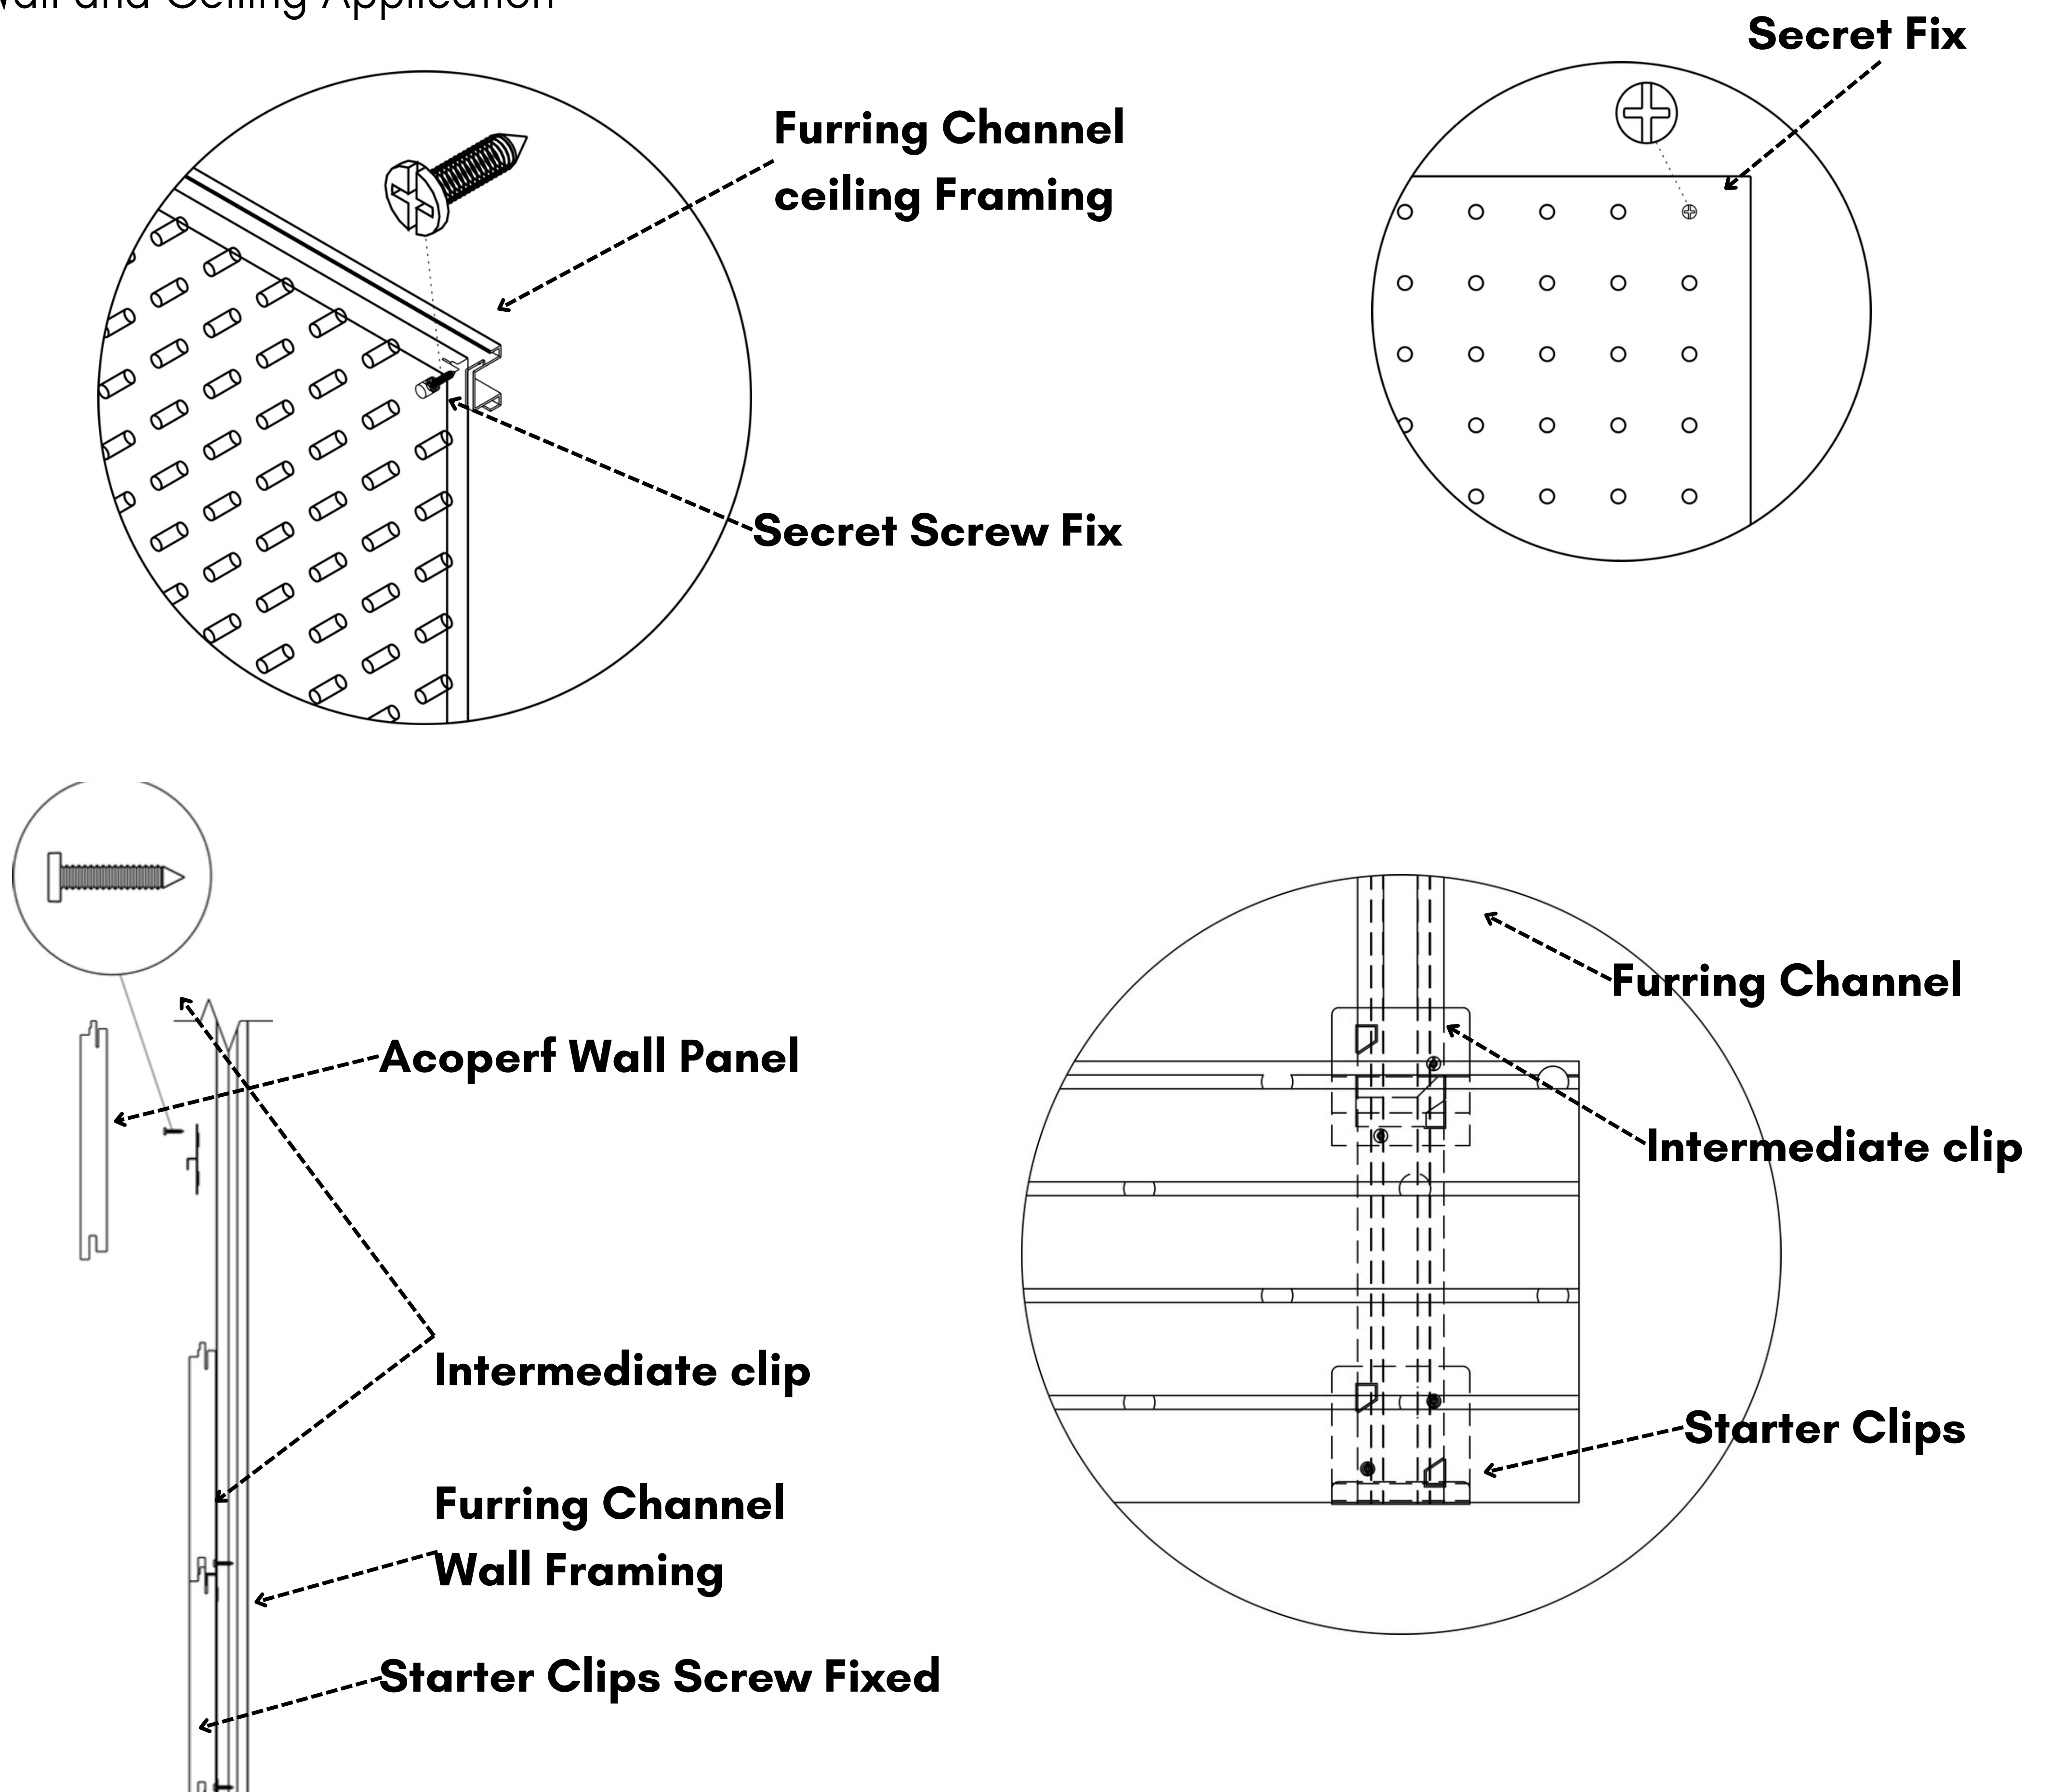

Disclaimer

All specifications provided in these documents are for guidance purposes only and should not be regarded as definitive. The selection of fixing types and sizes for installing these products must take into account the specific site conditions. It is the user's responsibility to ensure that the information in this document aligns with their own judgment and is suitable for the intended application. FX Acoustics Inc. assumes no liability for any outcomes resulting from the improper use of this material, whether due to negligence or otherwise



Contact Us-

CORPORATE OFFICE:

3688, SECTOR 46-C, CHANDIGARH-160047. INDIA.

FACTORY:

347-350B, HSIIDC INDUSTRIAL ESTATE, SAHA,
HARYANA-133104. INDIA

MUMBAI OFFICE:

PLOT-5, A301 INDUSAGAR. SECTOR-7, DR. B.A. ROAD,
CHARKOP, KANDIVALI (WEST), MUMBAI -400 067. INDIA

UAE: Al Rashidiya 3- Ajman UAE

CANADA: 60 Temple Rd NW, Calgary, Alberta

Email: info@acousticsfx.com/ sales@acousticsfx.com

Contact - +91-9996119099/ 9813050644/ 8599999347

PRODUCT IAW



FX Acoustics, a registered trademark of **FX Acoustics Inc.**, India, is a leader in the design and manufacturing of high-quality acoustical solutions. Known for innovation and precision, FX Acoustics offers a wide range of customizable products tailored to meet the unique needs of various environments, ensuring optimal sound quality and aesthetic appeal.