
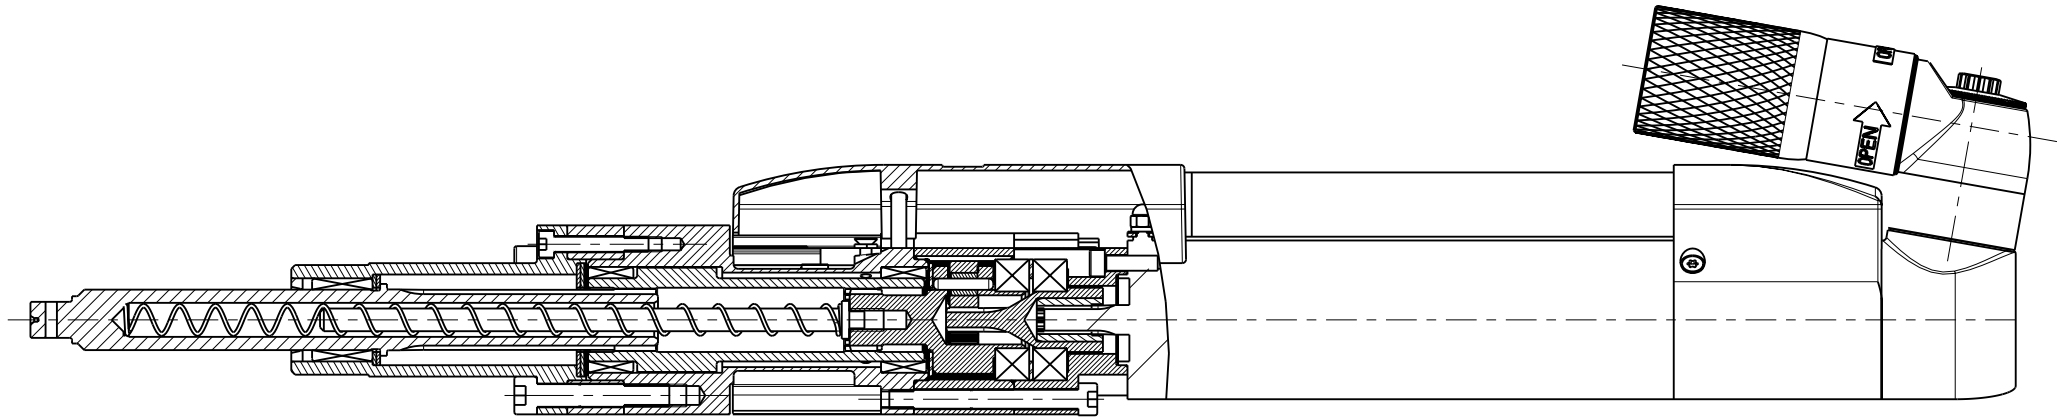


A-A

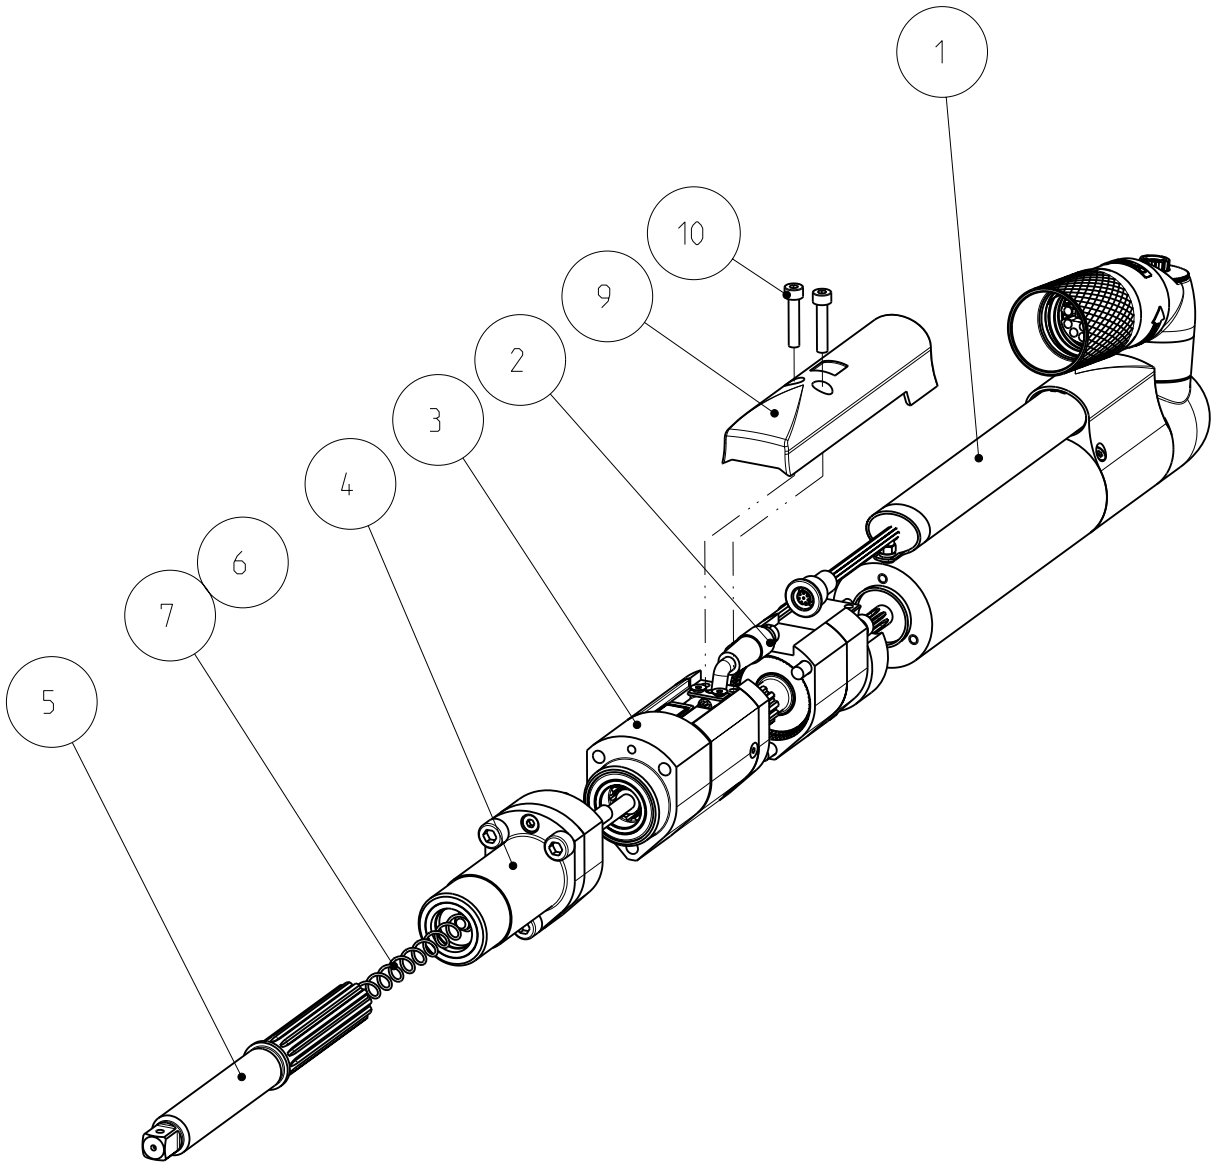

\* FOR GREASE INSTRUCTIONS SEE PZ4113

Strongest compression spring mounted at delivery

Comment: Max torque 20Nm. Max speed 2000 rpm.

|    |              |   |                    |                                 |
|----|--------------|---|--------------------|---------------------------------|
| 10 | 0211 1174 00 | 2 | HEX SOCK SCREW     | MC6S M4x20 12.9                 |
| 9  | 4230 2644 10 | 1 | CABLE RAIL         | QST 42-20                       |
| 8  | 4230 1480 00 | 1 | GREASE             | KERNITE Lubra K HS*             |
| 7  | 4230 1825 01 | 1 | COMPRESSION SPRING | 11-22N                          |
| 6  | 4230 1825 00 | 1 | COMPRESSION SPRING | 29-40N                          |
| 5  | 4230 1818 00 | 1 | SOCKET HOLDER      | QMX42: 3/8": ±0: tra.50: hole   |
| 4  | 4230 1616 82 | 1 | FRONT PART         | QMX42                           |
| 3  | 4230 2962 80 | 1 | TRANSDUCER SET     | QDT38-050                       |
| 2  | 4230 2170 80 | 1 | GEAR UNIT          | ETX42 ''38''i=7.500 ((65/10)+1) |
| 1  | 4230 3011 80 | 1 | MOTOR              | QST 42                          |

5  
5

|                                             |   |   |   |   |   |
|---------------------------------------------|---|---|---|---|---|
| Tolerances, if not indicated, according to: | - | - | - | - | - |
| AC-STD                                      | - | - | - | - | - |

|                              |  |                     |                 |                       |                          |               |               |
|------------------------------|--|---------------------|-----------------|-----------------------|--------------------------|---------------|---------------|
| Name QST42-20CT-T50-L134-H10 |  |                     |                 | QST                   |                          | Secrecy class |               |
| Material -                   |  |                     |                 | 1102 K/-              |                          |               |               |
| -                            |  |                     |                 | CAD Pro/E             |                          |               |               |
|                              |  | Scale 1:2           | Format A3       | Family MK2_G          | 5                        | Compare -     | Drawing owner |
| Drawn tooten                 |  | Blank -             |                 | Replaces 8435 6020 10 |                          | T00           |               |
| Transferred from SW          |  | Cons.class 1295 K/- | Rev 5           | Status RELEASED       | Designation 8435 6020 10 |               |               |
|                              |  | Mass/Volume 3.4 kg  | Date 2006-11-09 | Sheet 1 (2)           |                          |               |               |

|      |      |                                                  |            |       |
|------|------|--------------------------------------------------|------------|-------|
| 5    | -    | New connector: Motor & Transducer replaced = MK2 | 2013-03-04 | CSR   |
| Note | Pos. | Modified from                                    | Date       | Intr. |

|      |      |                                                  |            |       |
|------|------|--------------------------------------------------|------------|-------|
| 5    | -    | New connector: Motor & Transducer replaced = MK2 | 2013-03-04 | CSR   |
| Note | Pos. | Modified from                                    | Date       | Intr. |