
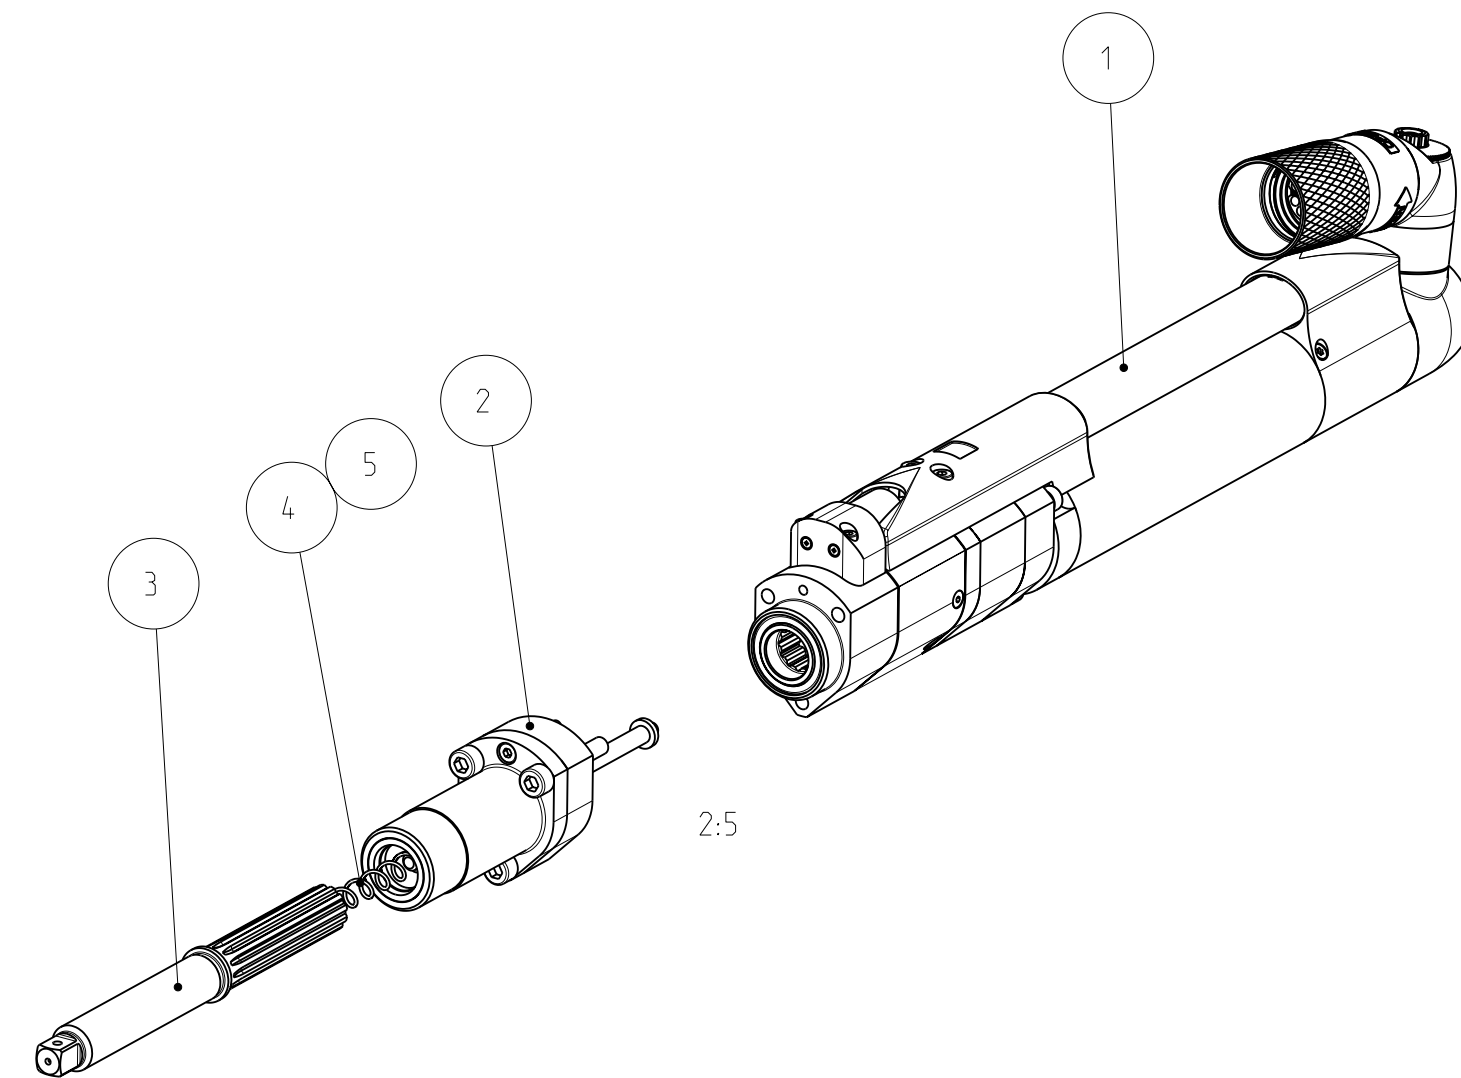
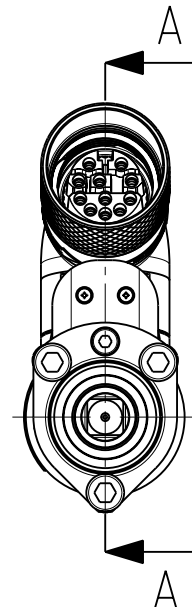


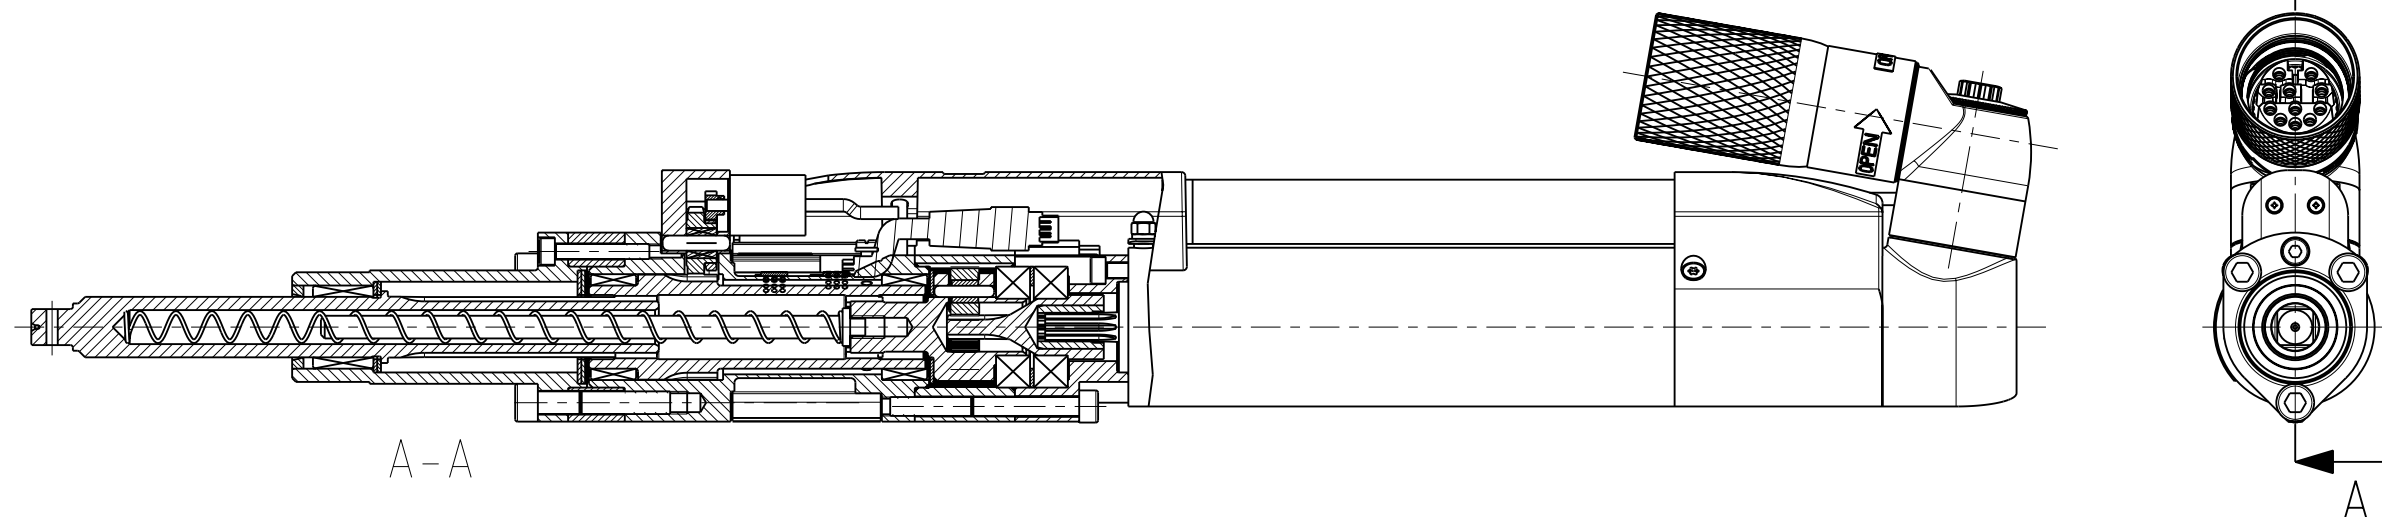

*FOR GREASE INSTRUCTIONS SEE PZ4113

Strongest compression spring mounted at delivery
Max torque 20 Nm. Max speed 2000 rpm.

6	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
5	4230 1825 01	1	COMPRESSION SPRING	11-22N
4	4230 1825 00	1	COMPRESSION SPRING	29-40N
3	4230 1818 00	1	SOCKET HOLDER	QMX42: 3/8": ±0: tra.50: hole
2	4230 1616 82	1	FRONT PART	QMX42
1	4230 3080 00	1	QST42-20CTTA	Max torque 20 Nm. Max speed 2000rpm.
Pos	Designation	Number	Name	Comment



Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST42-20CTTA-T50-L134-H10					Secrecy class -	
Material -					1102 K/-	
-					CAD Pro/E	
Scale 1:2		Format A3	Family MK2_G	Compare -	Drawing owner	
Drawn MEM		Blank -		Replaces	TOO	
Cons.class 1295 K/-		Rev 4	Status RELEASED	Designation		
Mass/Volume 3.4 kg		Date 2007-05-11		8435 6020 70		

4	-	New connector: Motor & Transducer replaced = MK2	2013-03-06	ASH
Note	Pos.	Modified from	Date	Intr.

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

[illegible]

4	-	New connector: Motor & Transducer replaced = MK2	2013-03-06	ASH
Note	Pos.	Modified from	Date	Intr.

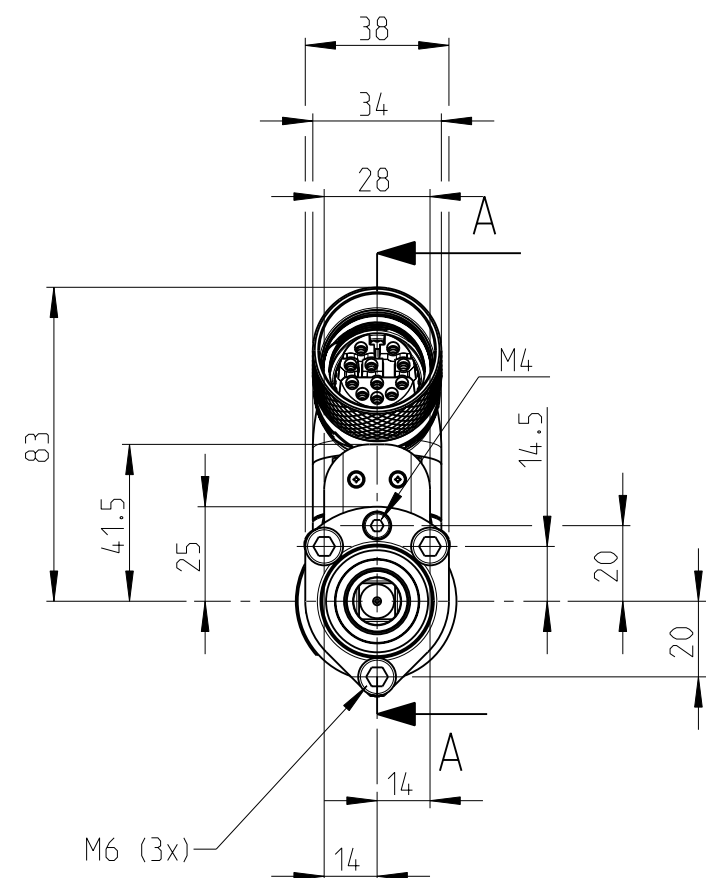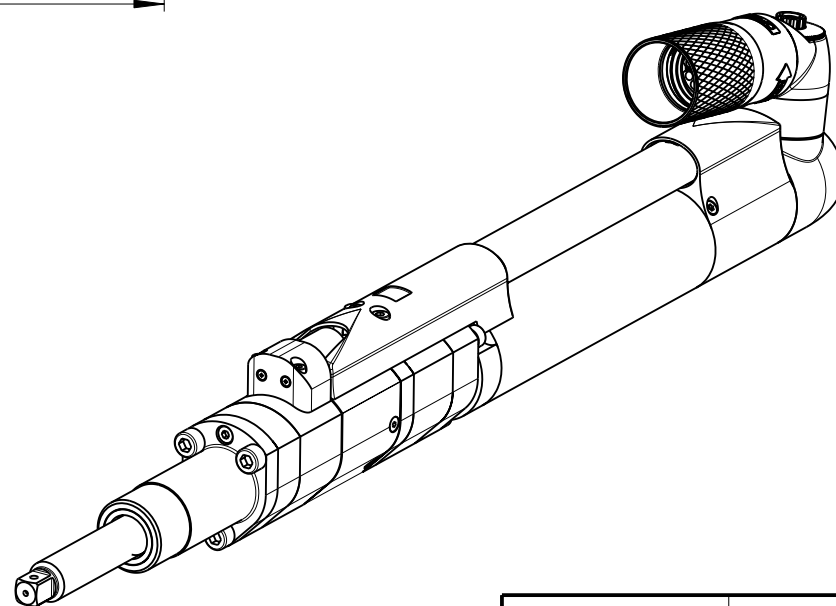

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST42-20CTTA-T50-L134-H10					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
<i>Atlas Copco</i>		Scale 1:2	Format A3	Family MK2_G	Compare -	Drawing owner
Drawn MEM			Blank -		Replaces	TOO
Transferred from -	Cons.class 1295 K/-	Rev 4	Status RELEASED	Designation		Sheet 2 (2)
	Mass/Volume 3.4 kg		Date 2007-05-11	8435 6020 70		