
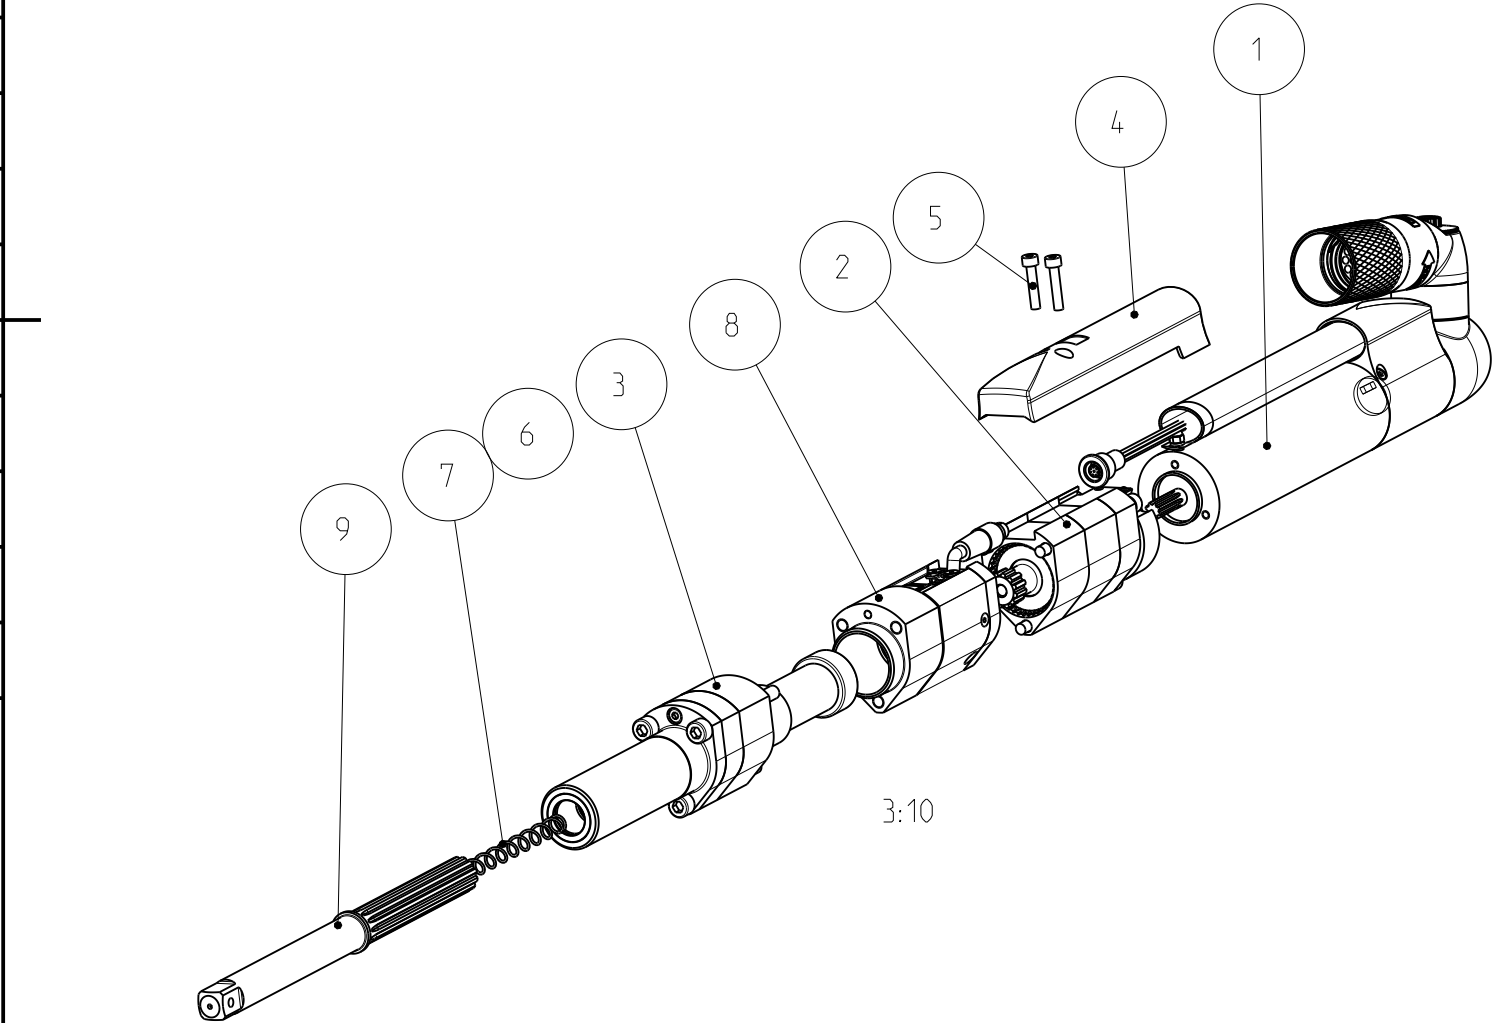


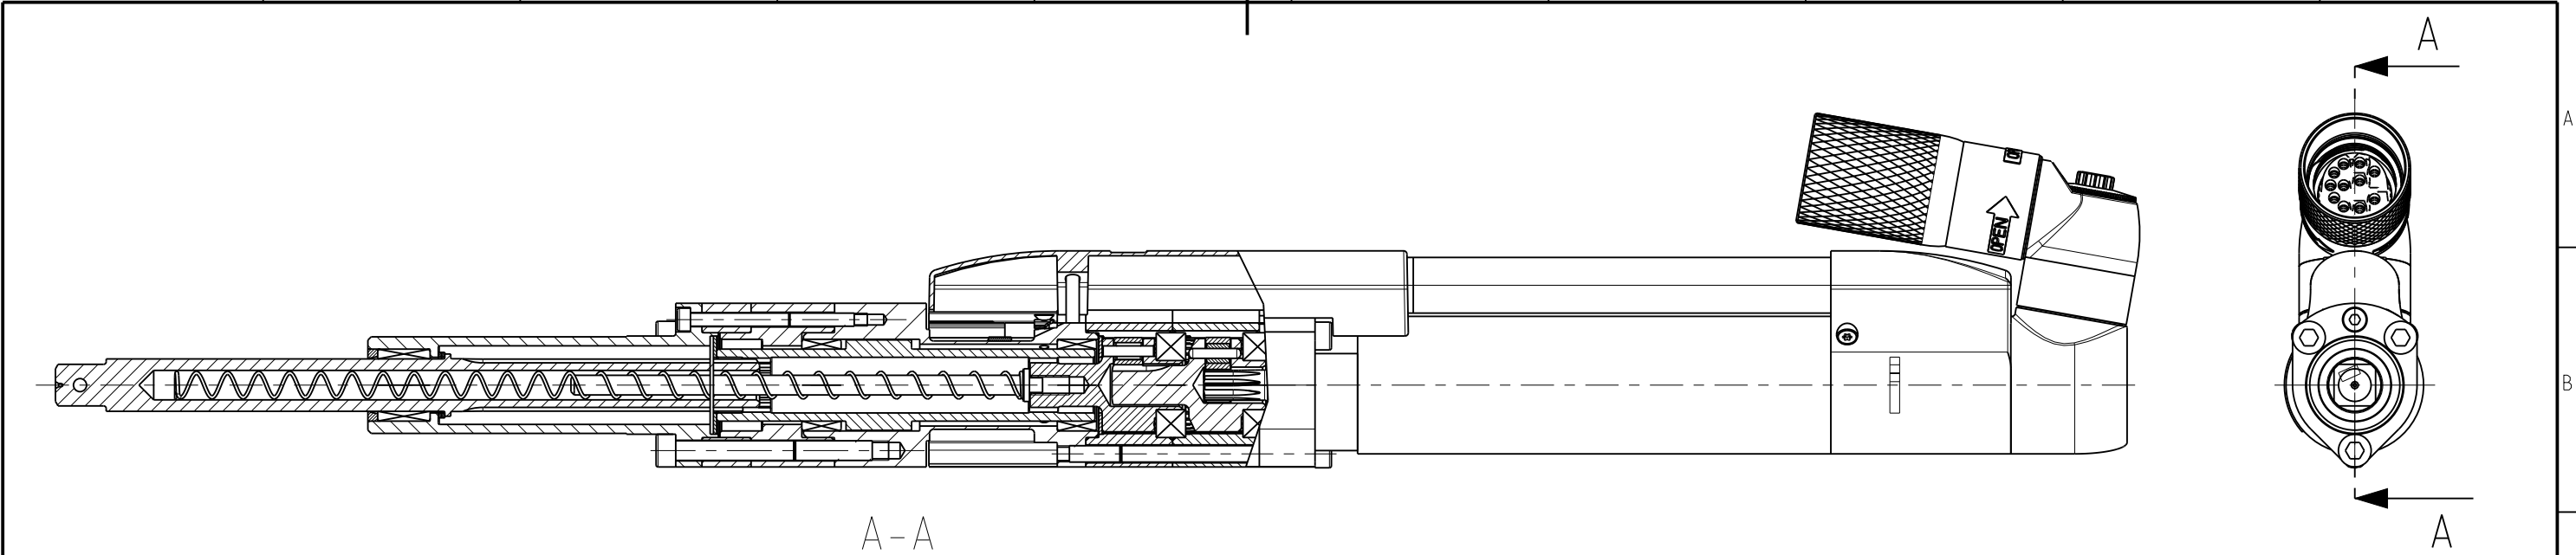

FOR GREASE INSTRUCTION SEE PZ4113.

Strongest compression spring mounted at delivery

MAX TORQUE 50Nm. MAX SPEED 700 rpm.

10	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
9	4230 2120 00	1	SOCKET HOLDER	1/2'': ±0mm :tra. 3'' QM42 thru hole
8	4230 2972 80	1	TRANSDUCER	QDT38-050
7	4230 2115 00	1	COMPRESSION SPRING	28-40N
6	4230 2116 00	1	COMPRESSION SPRING	10-18N Tra.3"
5	0211 1174 00	2	HEX SOCK SCREW	MC6S M4x20 12.9
4	4230 2644 11	1	CABLE RAIL	QST 42-50
3	4230 2710 80	1	FRONT PART	QST42 3"
2	4230 2170 81	1	GEAR UNIT	''42'': i=21.33 (((39/9)+1)*((39/13)+1)))
1	4230 3011 80	1	MOTOR	QST 42
Pos	Designation	Number	Name	Comment

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-


Name QST42-50CT-T76-L189-H13					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
	Scale 1:2	Format A3	Family MK2		Compare -	Drawing owner T00
	Drawn JLT		Blank -	Replaces		
Transferred from -	Cons.class 1295 K/-	Rev 4	Status Released		Designation 8435 6030 11	
	Mass/Volume 4 kg		Date 2007-07-03		Sheet 1 (2)	

4	-	Dimension dia 30 h10 was 29,5 h9	2018-01-02	BNn
Note	Pos.	Modified from	Date	Intr.

Model name	8435603011	Rev.Ver	4.1
Drawing name	8435603011	Rev.Ver	4.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

4	-	Dimension dia 30 h10 was 29,5 h9	2018-01-02	BNn
Note	Pos.	Modified from	Date	Intr.

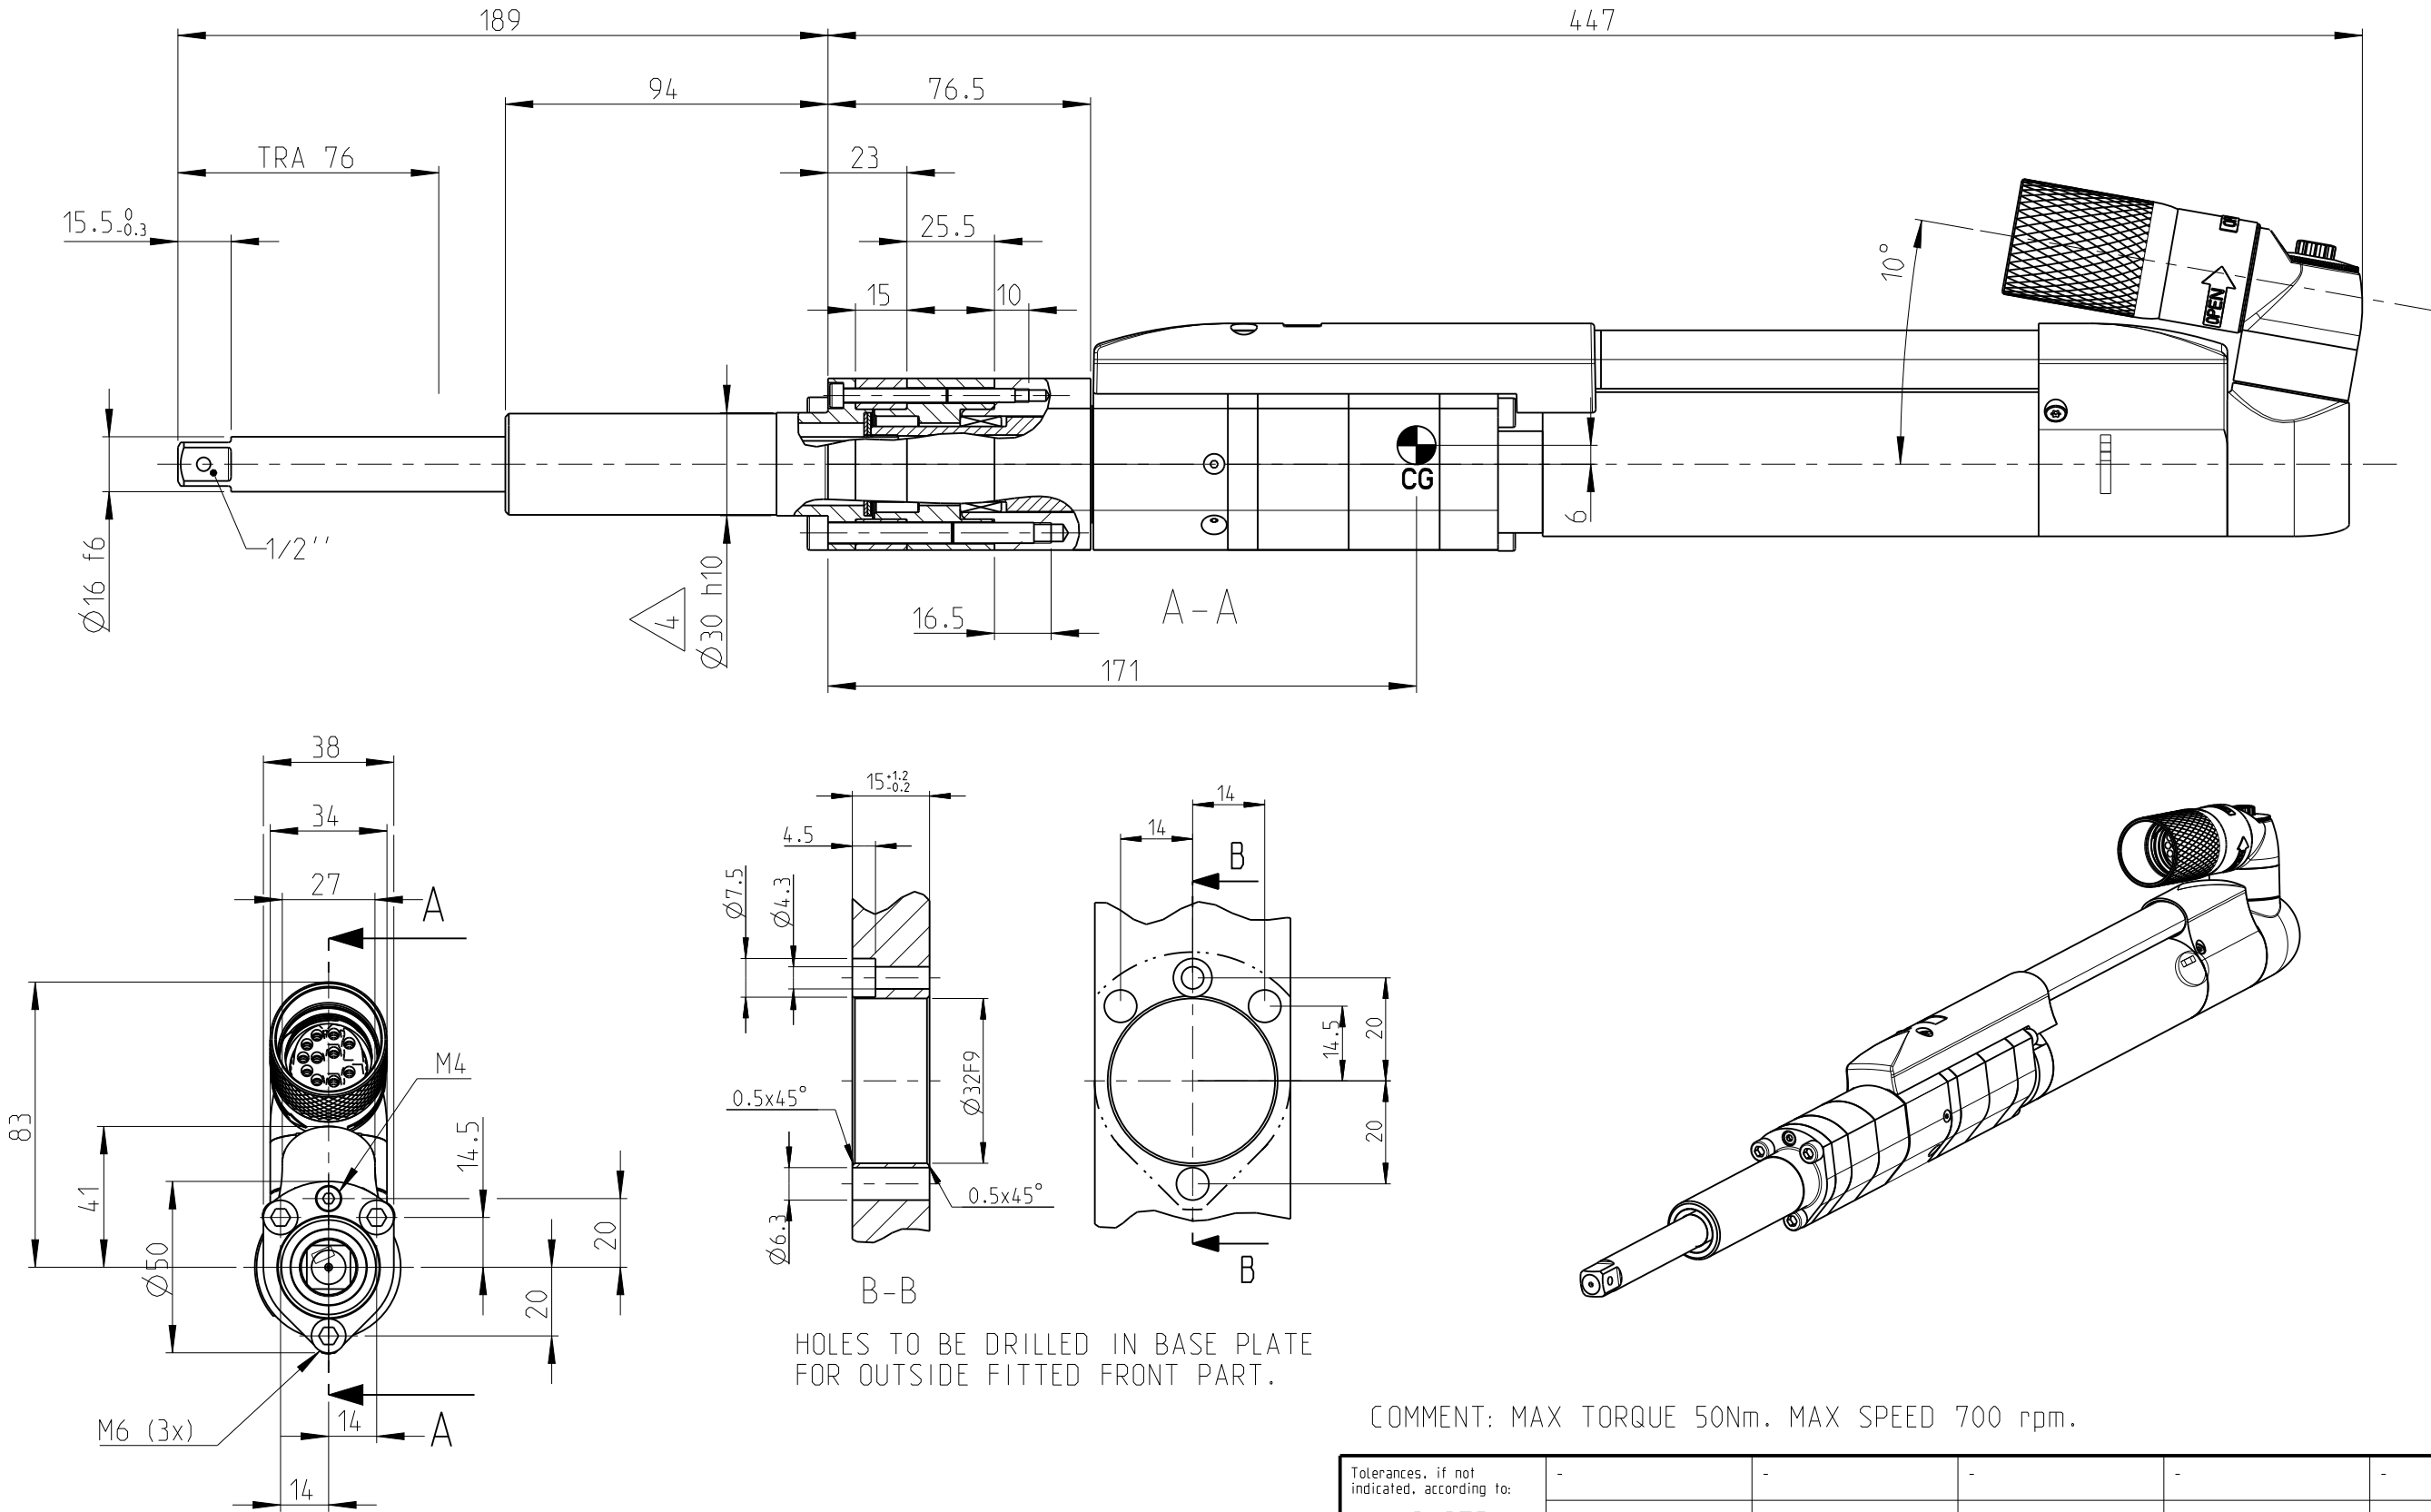

HOLES TO BE DRILLED IN BASE PLATE FOR OUTSIDE FITTED FRONT PART.

COMMENT: MAX TORQUE 50Nm. MAX SPEED 700 rpm.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST42-50CT-T76-L189-H13					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
 <i>Atlas Copco</i> 		Scale 1:2	Format A3	Family MK2	Compare -	Drawing owner
Drawn JLT			Blank -		Replaces	T00
Transferred from -		Cons.class 1295 K/-	Rev 4	Status Released	Designation	Sheet 2 (2)
		Mass/Volume 4 kg	Date 2007-07-03		8435 6030 11	