
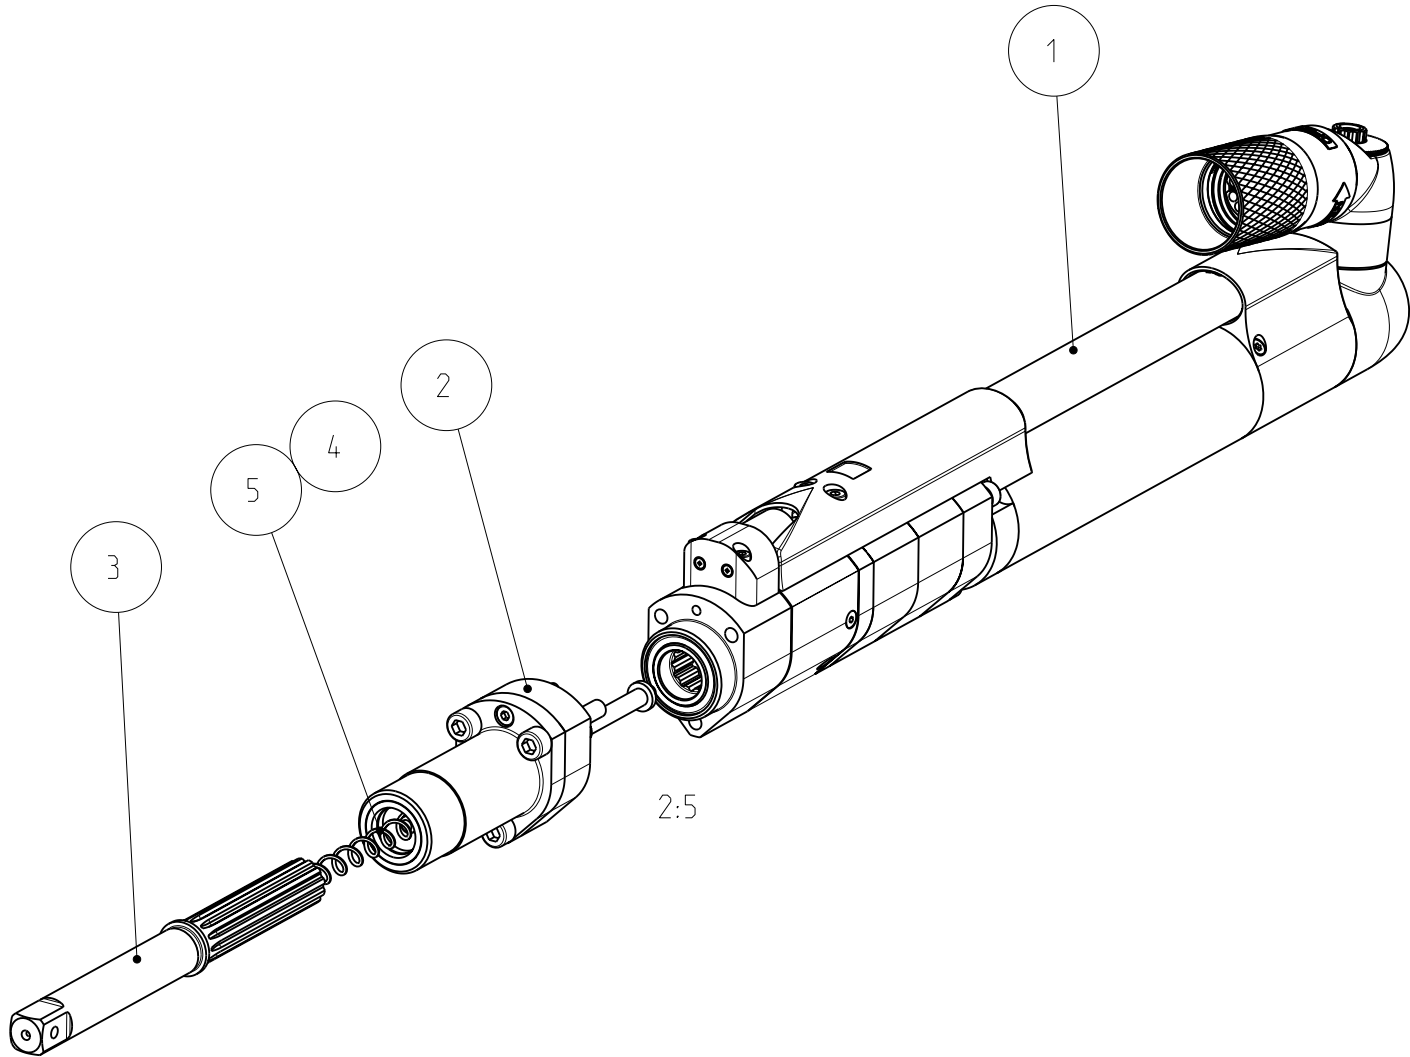


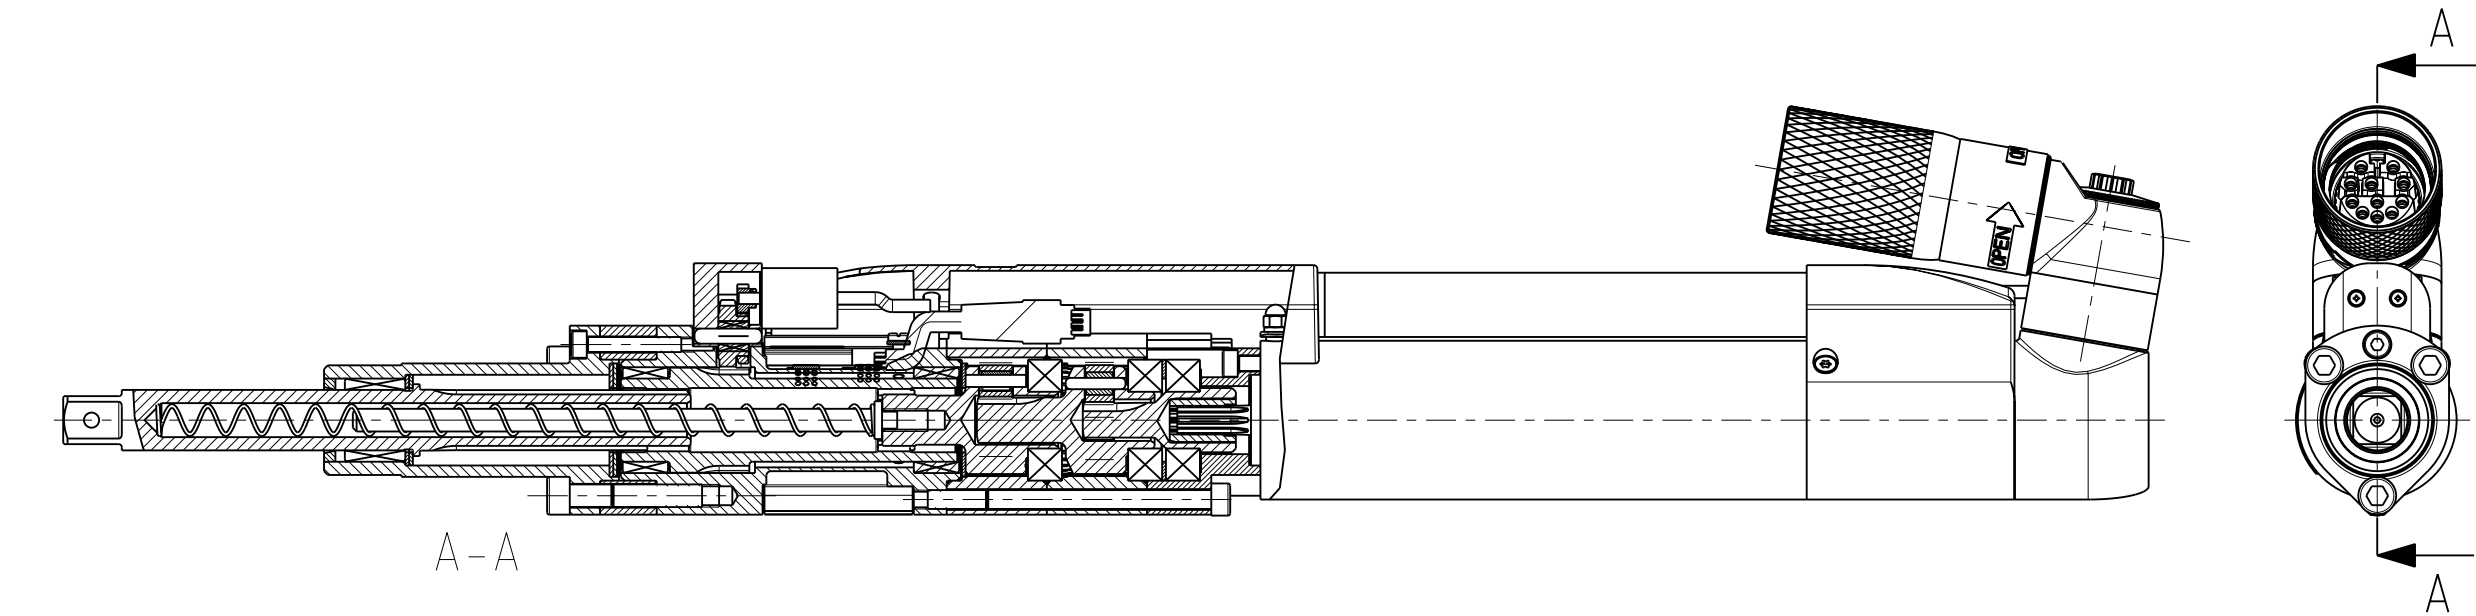

\*FOR GREASE INSTRUCTIONS SEE PZ4113

Strongest compression spring mounted at delivery  
Max torque 50 Nm. Max speed 700 rpm.

|     |              |        |                    |                                     |
|-----|--------------|--------|--------------------|-------------------------------------|
| 6   | 4230 1480 00 | 1      | GREASE             | KERNITE Lubra K HS*                 |
| 5   | 4230 1825 00 | 1      | COMPRESSION SPRING | 29-40N                              |
| 4   | 4230 1825 01 | 1      | COMPRESSION SPRING | 11-22N                              |
| 3   | 4230 1819 00 | 1      | SOCKET HOLDER      | QM.42: 1/2'' : ±0 : tra.50: hole    |
| 2   | 4230 1616 82 | 1      | FRONT PART         | QMX42                               |
| 1   | 4230 3081 00 | 1      | QST42-50CTTA       | Max torque 50 Nm. Max speed 700rpm. |
| Pos | Designation  | Number | Name               | Comment                             |



|                                             |   |   |   |   |   |
|---------------------------------------------|---|---|---|---|---|
| Tolerances, if not indicated, according to: | - | - | - | - | - |
| AC-STD                                      | - | - | - | - | - |

|                  |                           |             |        |             |               |
|------------------|---------------------------|-------------|--------|-------------|---------------|
| Name             | QST42-50CTTA-T50-L134-H13 |             |        |             | Secrecy class |
| Material         | -                         |             |        |             | 1102 K/-      |
|                  | -                         |             |        |             | CAD Pro/E     |
| Scale            | 1:2                       | Format      | A3     | Family      | MK2_G 4       |
| Drawn            | JLT                       | Blank       | -      | Compare     | -             |
| Cons.class       | 1295 K/-                  | Rev         | 4      | Status      | RELEASED      |
| Transferred from | -                         | Mass/Volume | 3.7 kg | Date        | 2007-06-18    |
|                  |                           |             |        | Designation | 8435 6030 70  |
|                  |                           |             |        | Sheet 1 (2) |               |
|                  |                           |             |        | T00         |               |

|      |      |                                   |            |       |
|------|------|-----------------------------------|------------|-------|
| 4    | -    | Motor & Transducer replaced = MK2 | 2013-03-06 | ASH   |
| Note | Pos. | Modified from                     | Date       | Intr. |


|              |            |         |      |
|--------------|------------|---------|------|
| Model name   | 8435603070 | Rev.Ver | 4.0+ |
| Drawing name | 8435603070 | Rev.Ver | 4.1  |

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

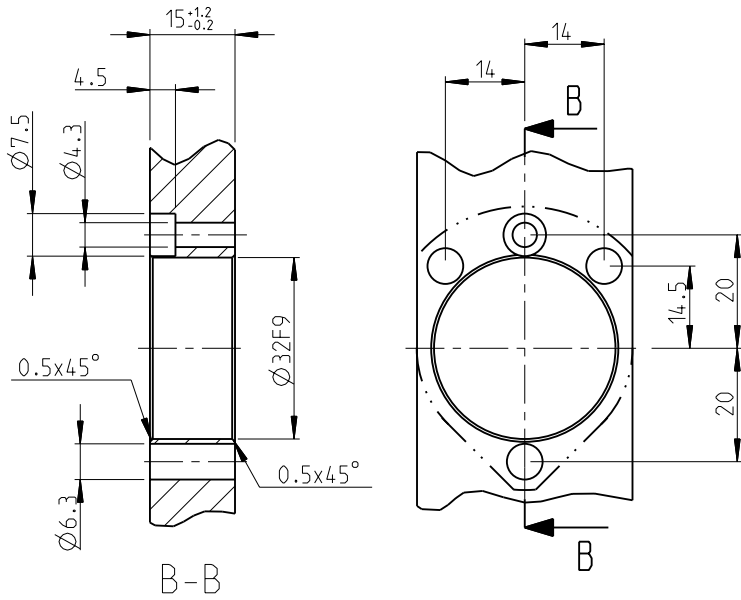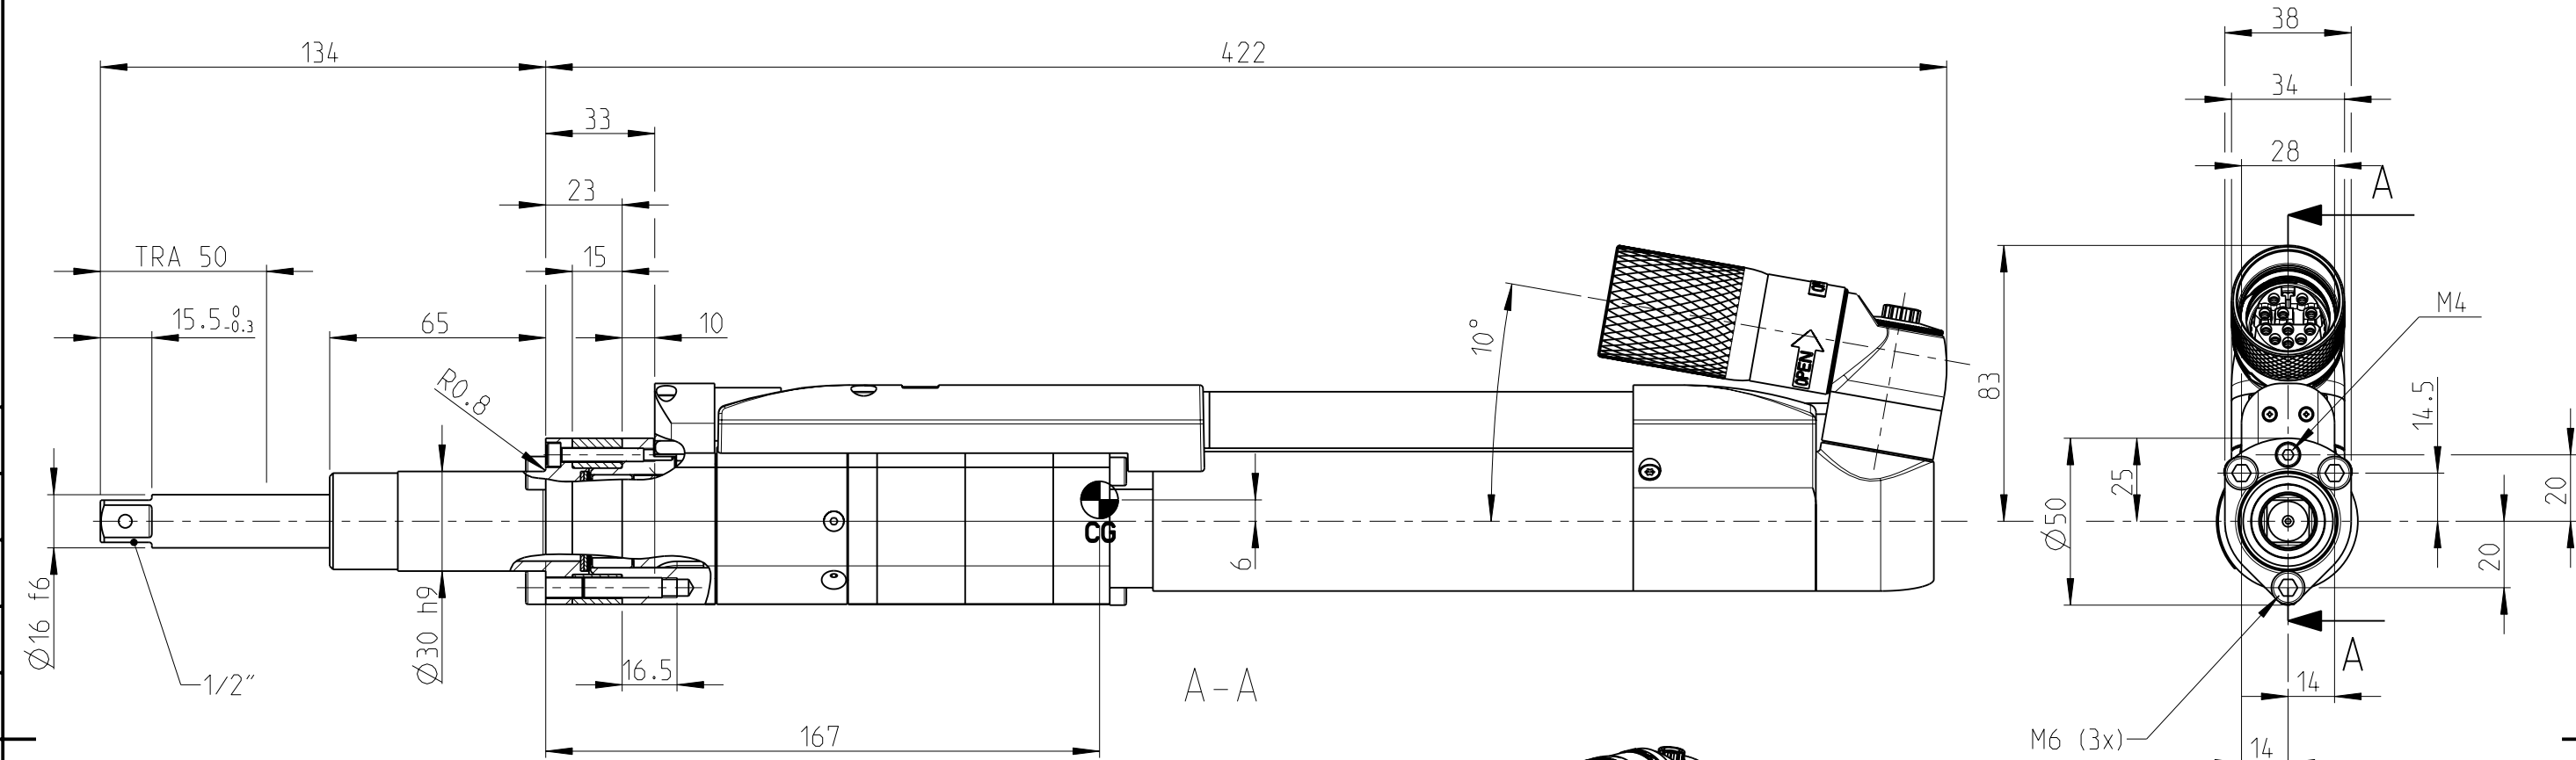

HOLES TO BE DRILLED IN BASE PLATE FOR OUTSIDE FITTED FRONT PART.

|      |      |                                   |            |       |
|------|------|-----------------------------------|------------|-------|
| 4    | -    | Motor & Transducer replaced = MK2 | 2013-03-06 | ASH   |
| Note | Pos. | Modified from                     | Date       | Intr. |

|                                                                                       |  |                     |           |                 |                          |                                                                                       |
|---------------------------------------------------------------------------------------|--|---------------------|-----------|-----------------|--------------------------|---------------------------------------------------------------------------------------|
| Tolerances, if not indicated, according to:                                           |  | -                   | -         | -               | -                        | -                                                                                     |
| AC-STD                                                                                |  | -                   | -         | -               | -                        | -                                                                                     |
| Name QST42-50CTTA-T50-L134-H13                                                        |  |                     |           |                 | Secrecy class            |  |
| Material -                                                                            |  |                     |           |                 | 1102 K/-                 |                                                                                       |
| -                                                                                     |  |                     |           |                 | CAD Pro/E                |                                                                                       |
|  |  | Scale 1:2           | Format A3 | Family MK2_G    | Compare -                | Drawing owner                                                                         |
|  |  | Drawn JLT           | Blank -   |                 | Replaces                 | TOO                                                                                   |
| Transferred from -                                                                    |  | Cons.class 1295 K/- | Rev 4     | Status RELEASED | Designation 8435 6030 70 | Sheet 2 (2)                                                                           |
|                                                                                       |  | Mass/Volume 3.7 kg  |           | Date 2007-06-18 |                          |                                                                                       |