


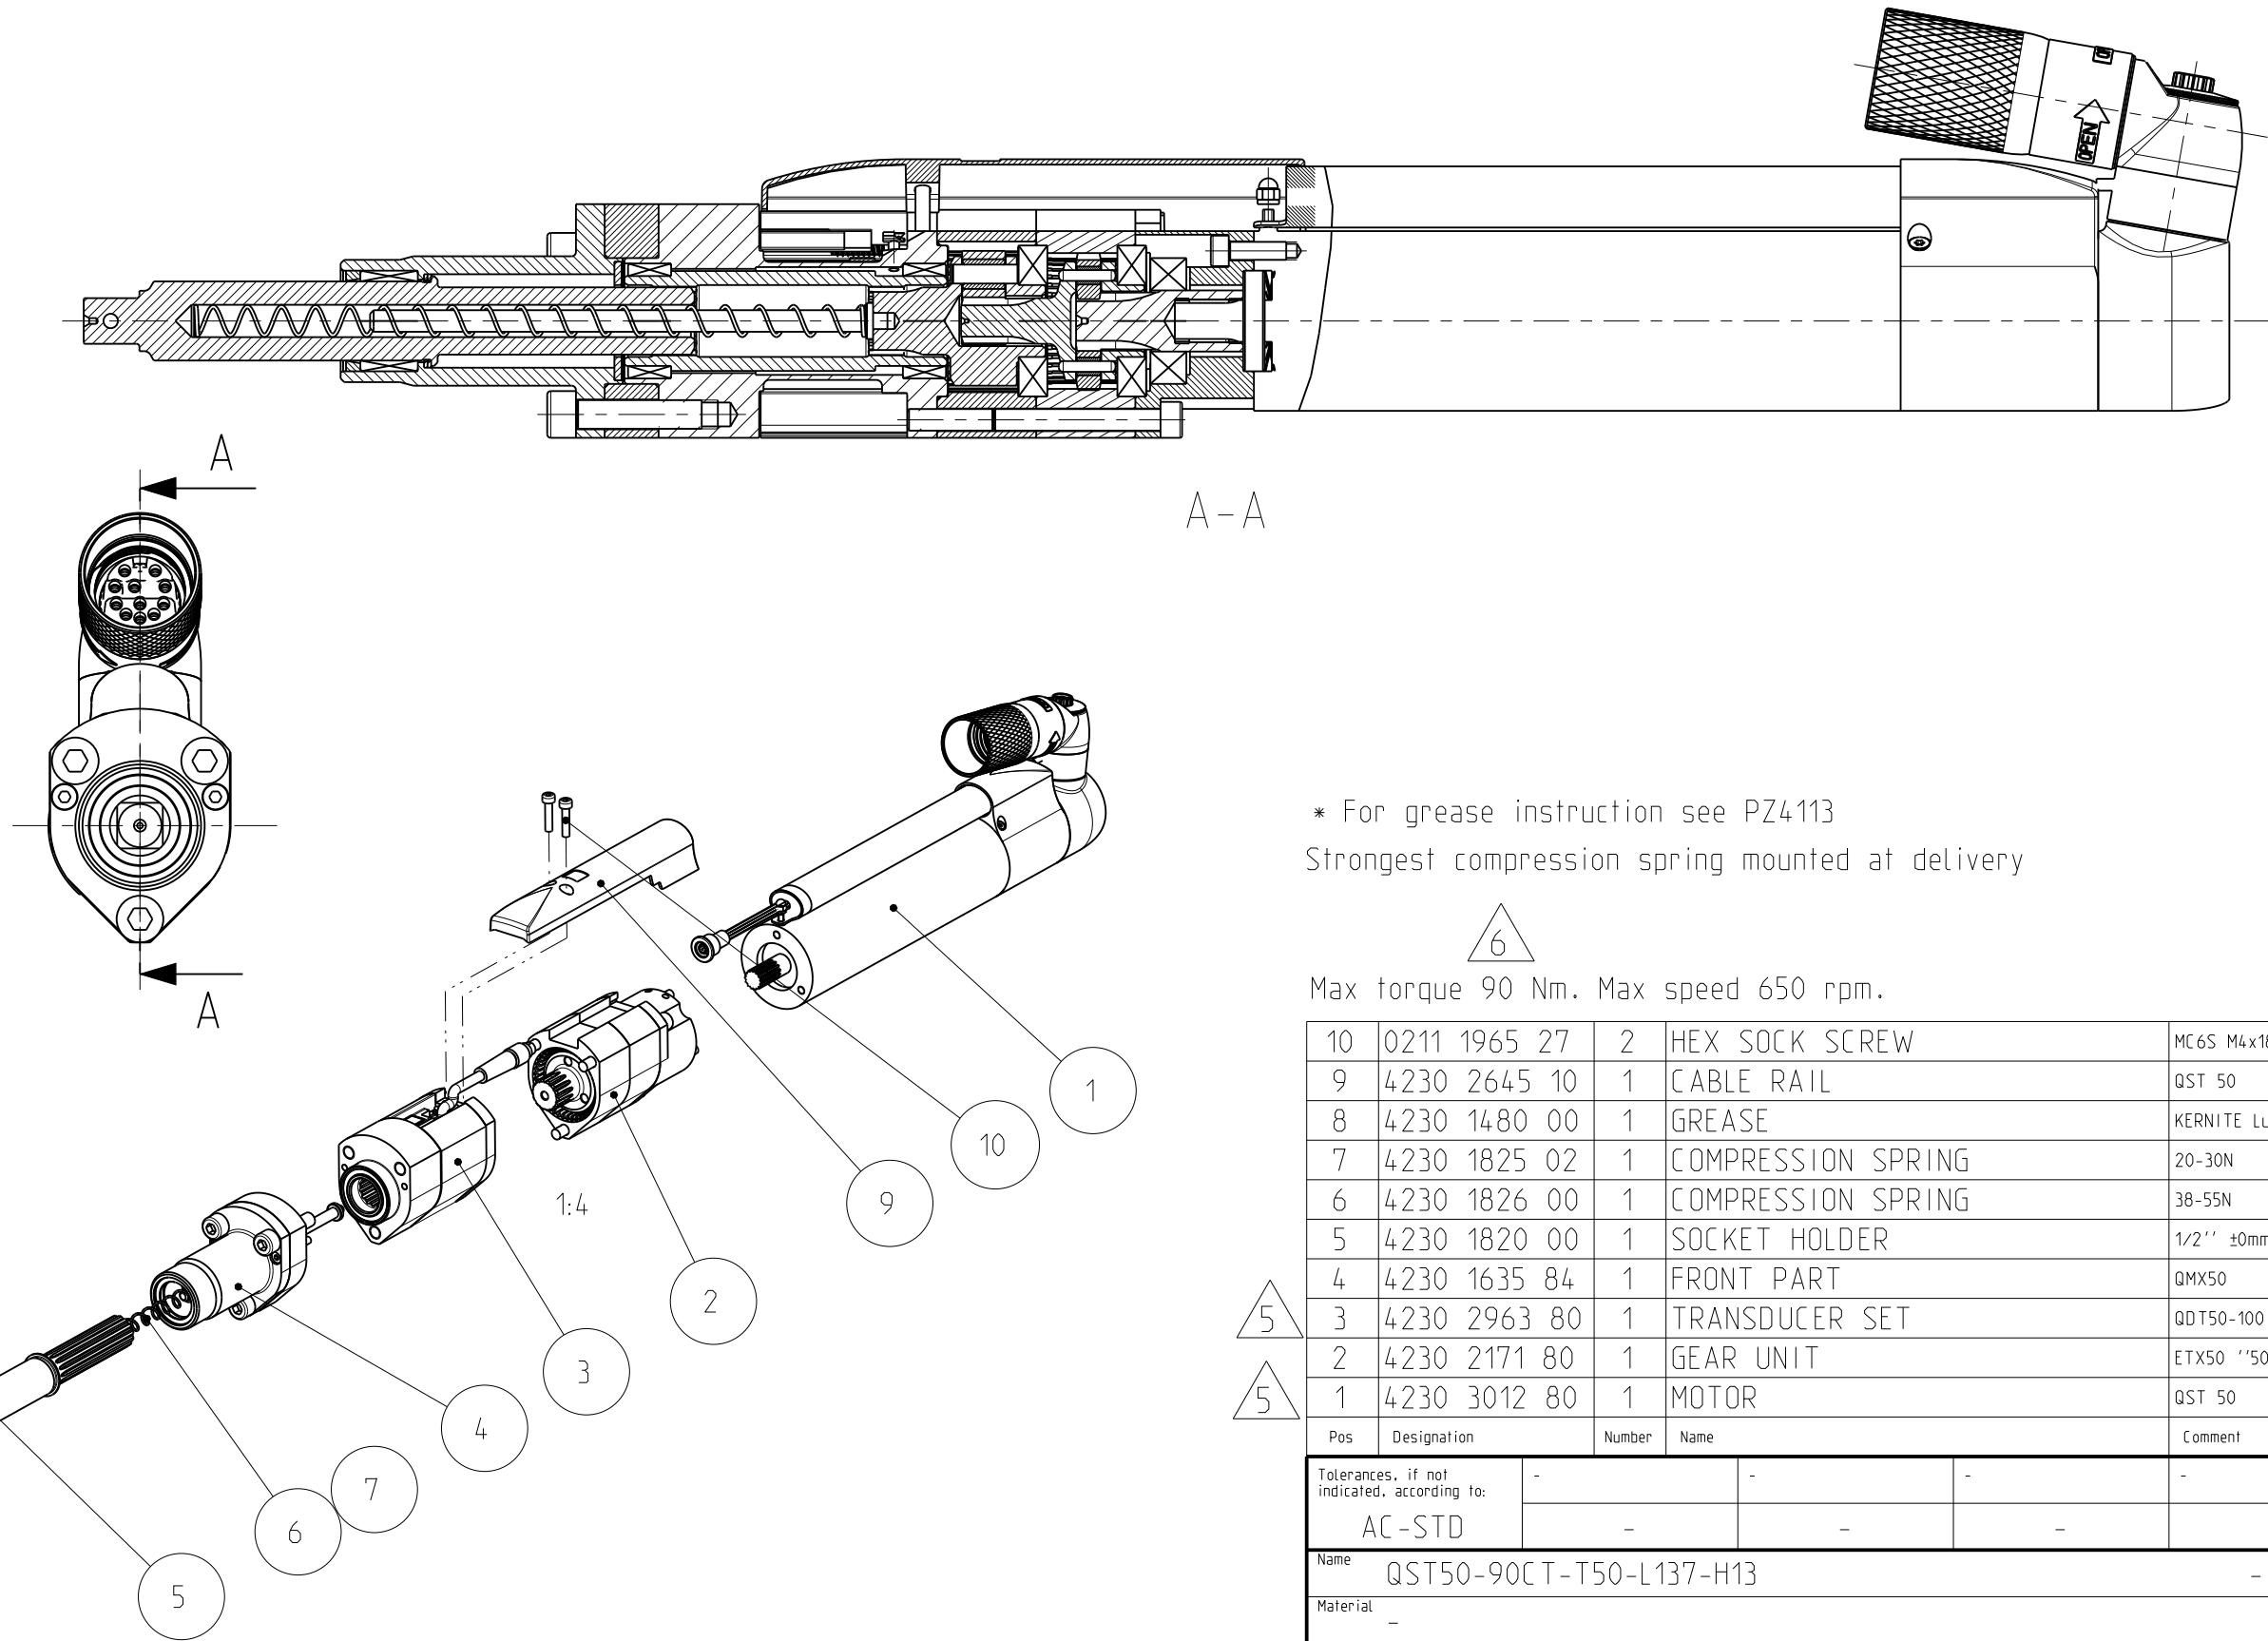

* For grease instruction see PZ4113
Strongest compression spring mounted at delivery

Max torque 90 Nm. Max speed 650 rpm.


10	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9
9	4230 2645 10	1	CABLE RAIL	QST 50
8	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
7	4230 1825 02	1	COMPRESSION SPRING	20-30N
6	4230 1826 00	1	COMPRESSION SPRING	38-55N
5	4230 1820 00	1	SOCKET HOLDER	1/2'' ±0mm 50mm travel WM5 thru hole
4	4230 1635 84	1	FRONT PART	QMX50
3	4230 2963 80	1	TRANSDUCER SET	QDT50-100
2	4230 2171 80	1	GEAR UNIT	ETX50 ''50'' : i=18.21= (((36/14)+1)*((41/10)+1)))
1	4230 3012 80	1	MOTOR	QST 50
Pos	Designation	Number	Name	Comment

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-
Name	QST50-90CT-T50-L137-H13				Secrecy class
Material	-				1102 K/-
-	-				CAD Pro/E
Scale	1:2	Format	A3	Family	MK2
Drawn	tooten		Blank	-	
Transferred from	Cons.class	1295 K/-	Rev	6	Status
-	Mass/Volume	5.9 kg	Date	2006-11-09	Released
Designation					8435 6040 10
Sheet 1 (2)					

6	-	Note changed. 90 Nm was 50 Nm.	2017-06-19	BNn
Note	Pos.	Modified from	Date	Intr.

Model name	8435604010	Rev.Ver	6.1
Drawing name	8435604010	Rev.Ver	6.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

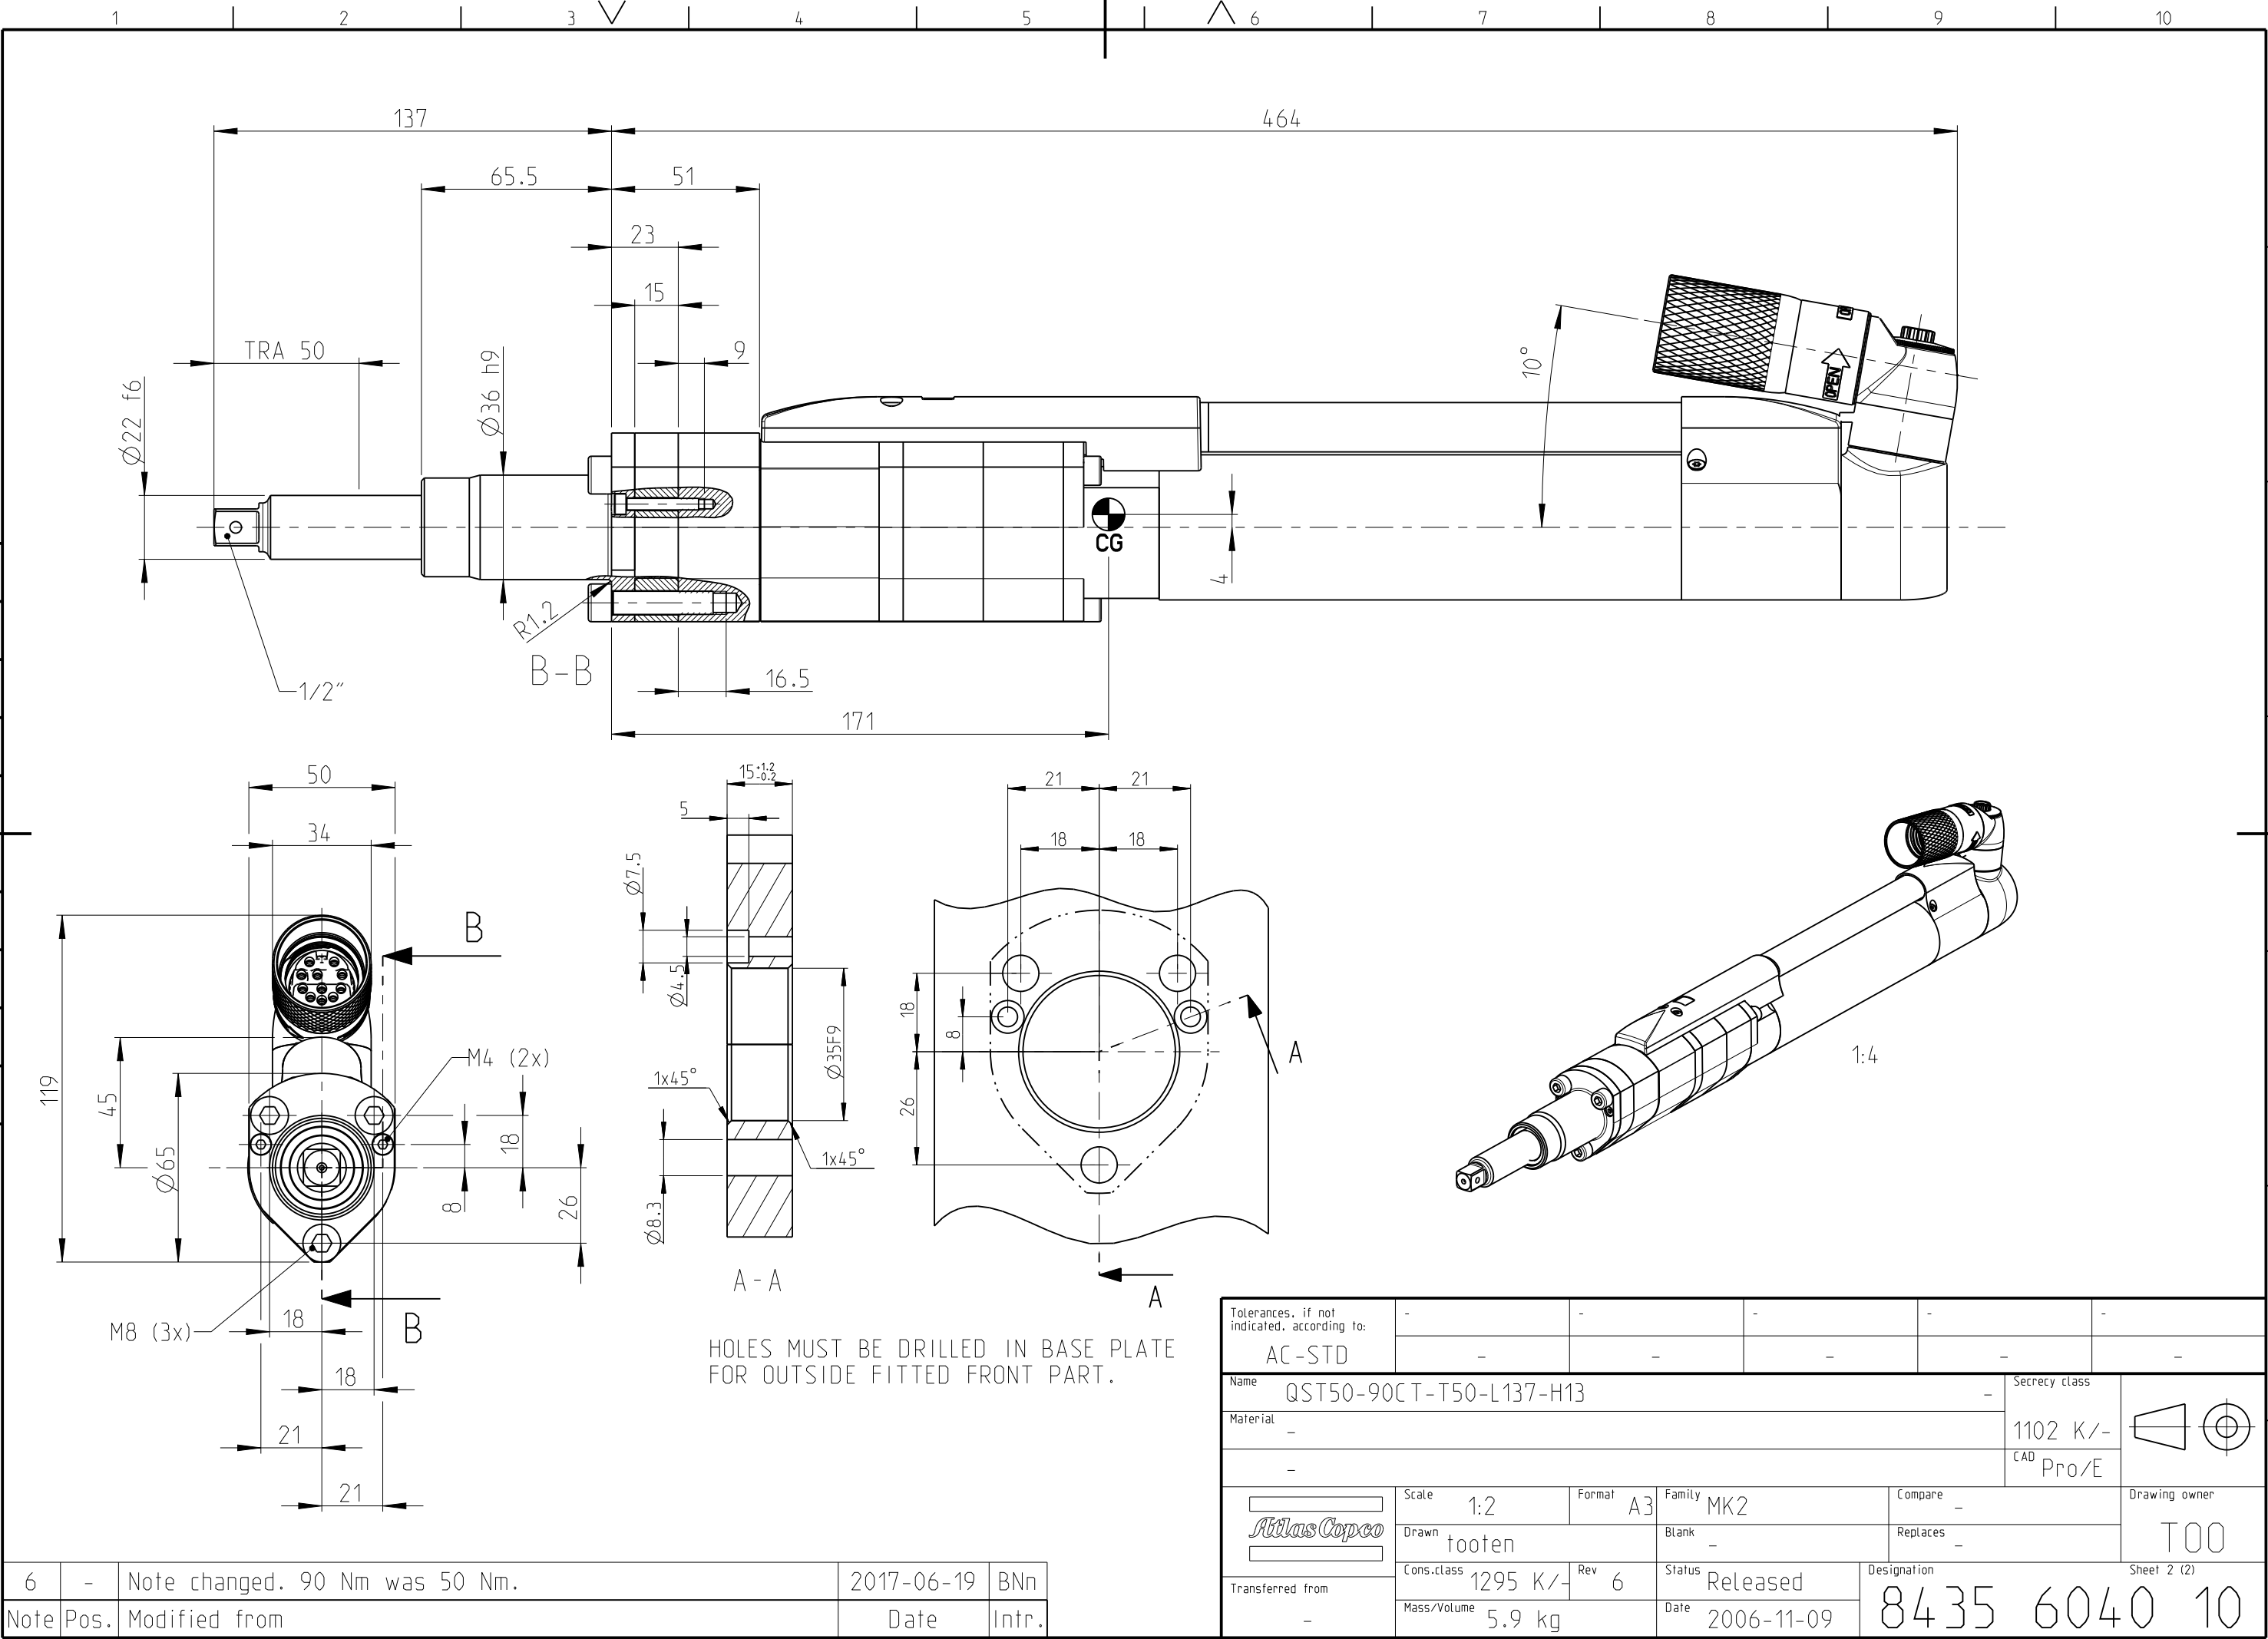

Tolerances, if not indicated, according to:				
AC-STD				
Name QST50-90CT-T50-L137-H13				Secrecy class
Material -				1102 K/-
-				CAD Pro/E
Atlas Copco	Scale 1:2	Format A3	Family MK2	Compare -
	Drawn tooten	Blank -		Replaces -
	Cons.class 1295 K/-	Rev 6	Status Released	Designation
Transferred from -	Mass/Volume 5.9 kg	Date 2006-11-09	8435 6040 10	
				Sheet 2 (2)
				Drawing owner T00