
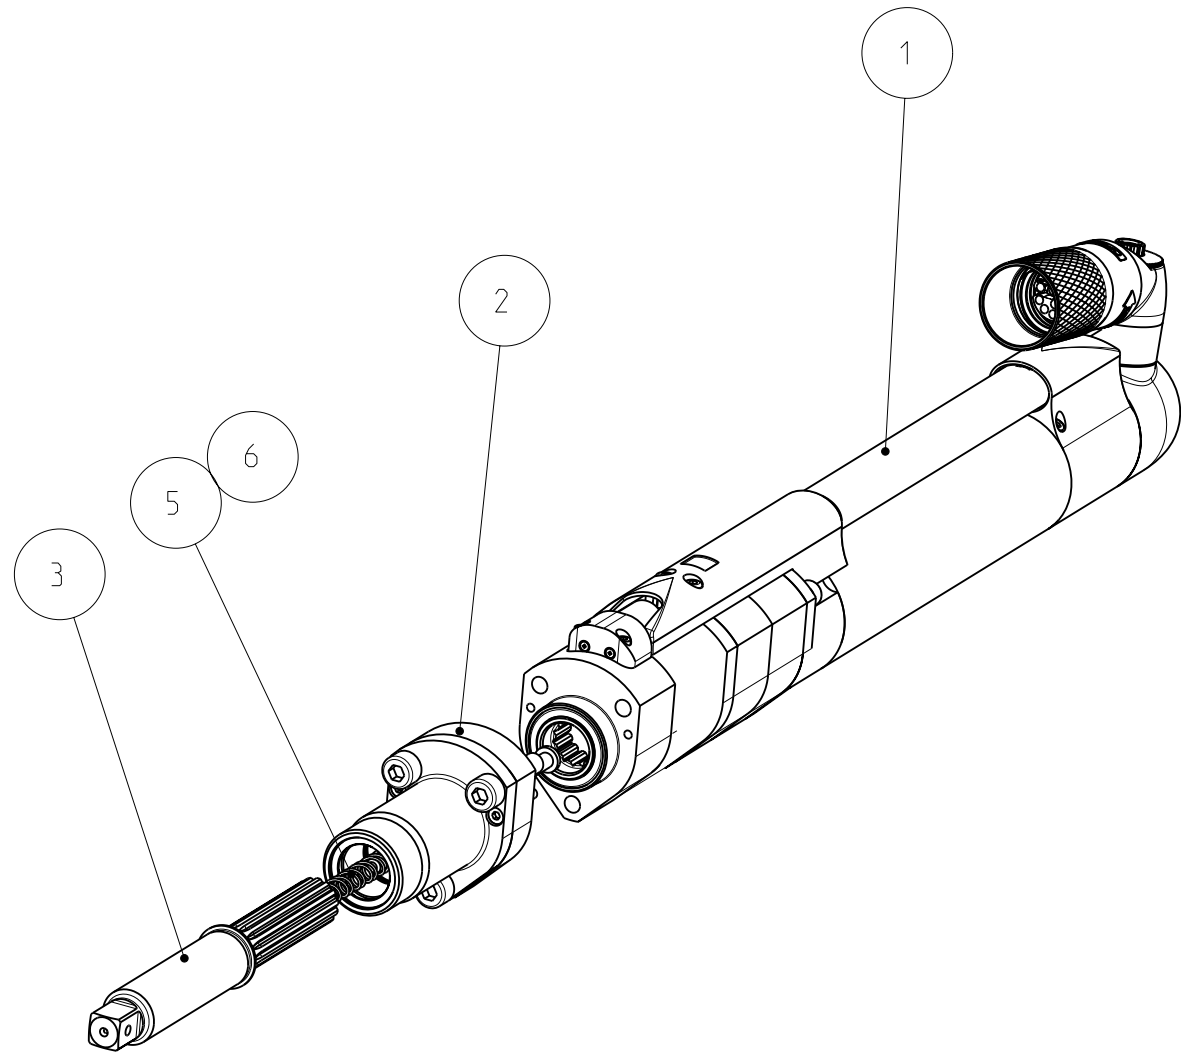


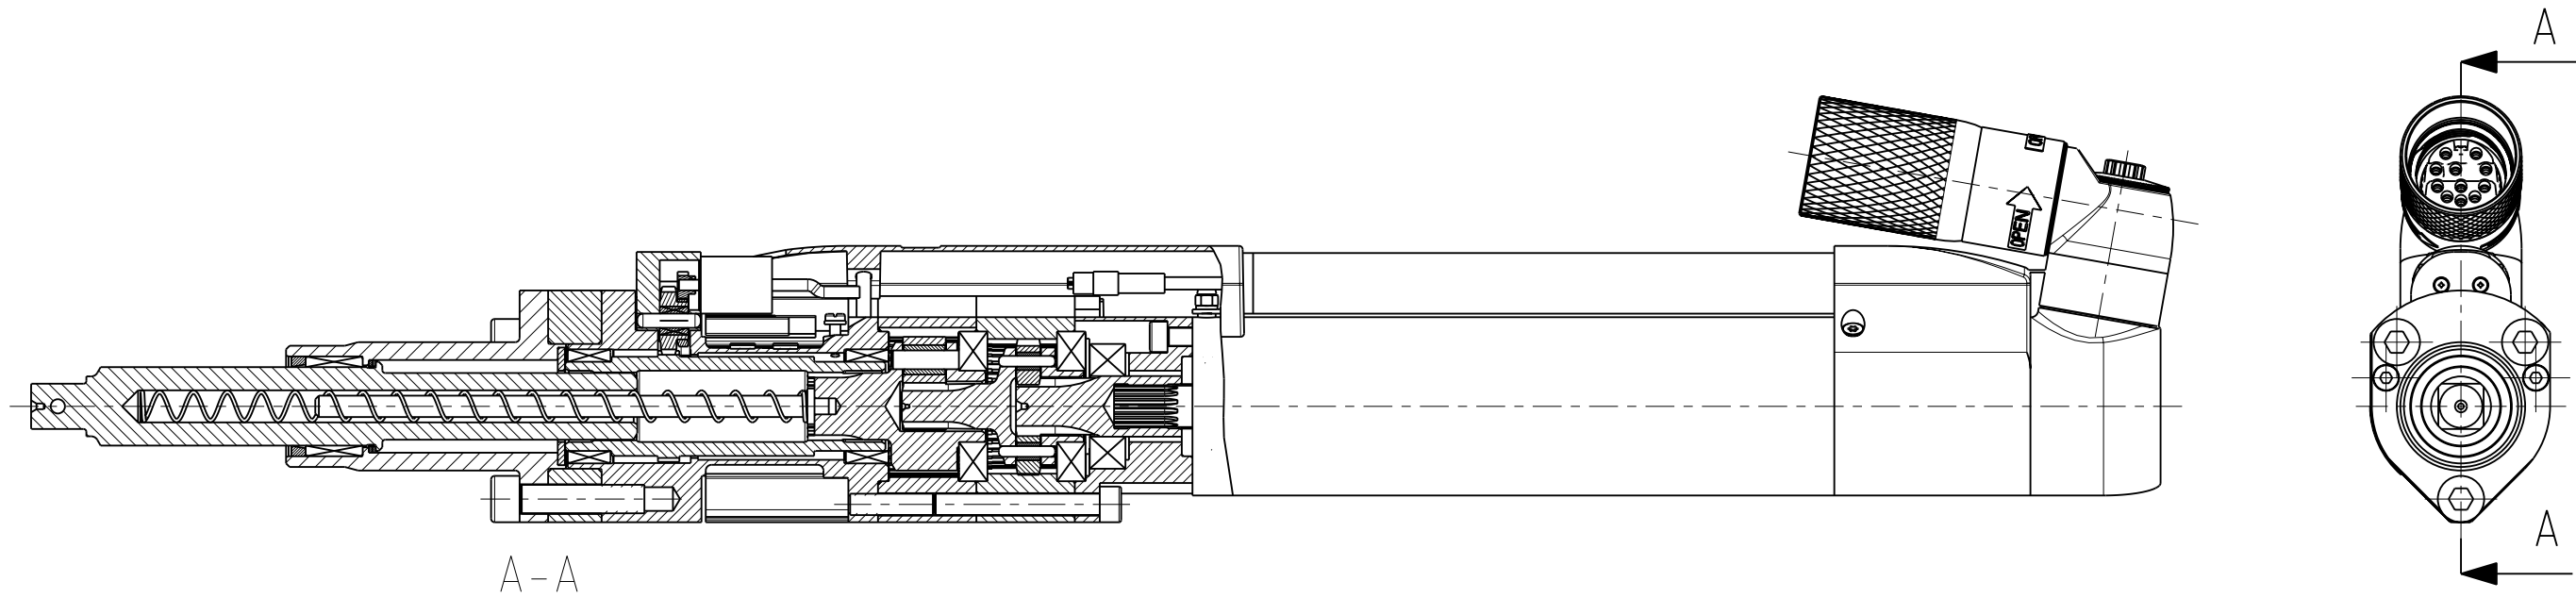

For grease instruction see PZ4113

Strongest compression spring mounted at delivery
Max torque 90Nm. Max speed 580 rpm.

5

6	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
5	4230 1825 02	1	COMPRESSION SPRING	20-30N
4	4230 1826 00	1	COMPRESSION SPRING	38-55N
3	4230 1820 00	1	SOCKET HOLDER	1/2'' ±0mm 50mm travel WM5 thru hole
2	4230 1635 84	1	FRONT PART	QMX50
1	4230 3082 00	1	QST50-90CTTA	Max torque 90 Nm. Max speed 580rpm.
Pos	Designation	Number	Name	Comment

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name	QST50-90CTTA-T50-L137-H13				QSTTA	Secrecy class	
Material	-				1102 K/-	CAD Pro/E	
Scale	1:2	Format	A3	Family	MK2_G	Compare	-
Drawn	PLK	Blank	-	Replaces	-	Drawing owner	T00
Transferred from	Cons.class	1295 K/-	Rev	5	Status	RELEASED	Designation
-	Mass/Volume	5.9 kg	Date	2007-07-19	8435	6040	70

5	-	New connector: Motor & Transducer replaced = MK2	2013-03-07	JZR
Note	Pos.	Modified from	Date	Intr.

HOLE MUST BE DRILLED IN BASE PLATE
FOR OUTSIDE FITTED FRONT PART.