
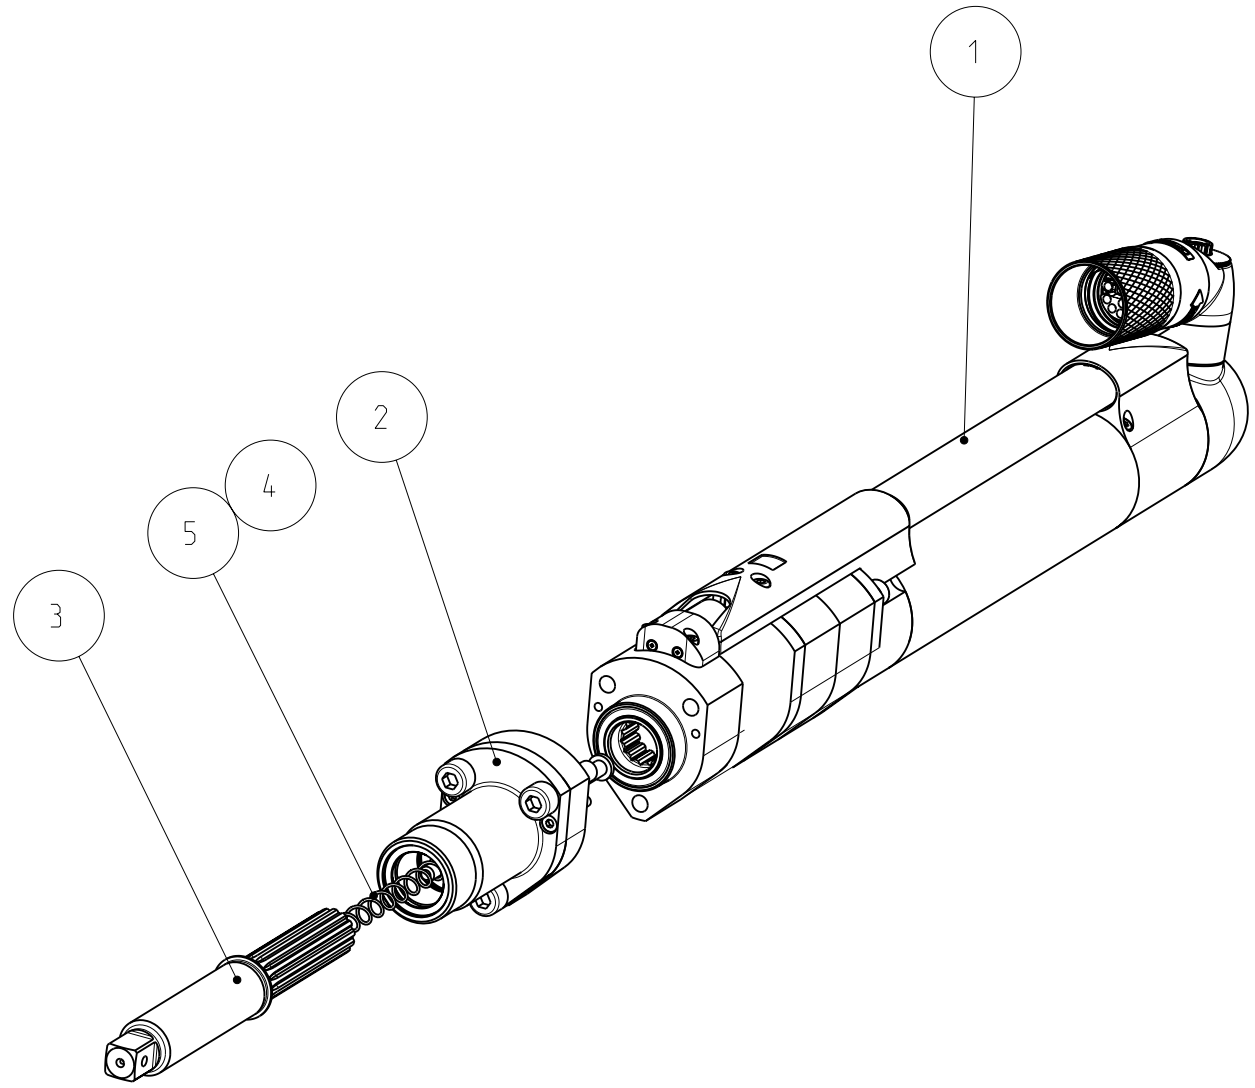


A-A

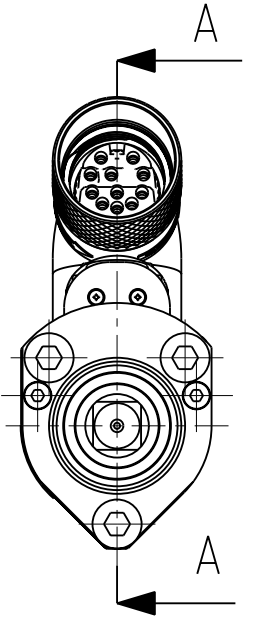

For grease instruction see PZ4113

Strongest compression spring mounted at delivery

Max torque 150Nm. Max speed 380 rpm.



6	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
5	4230 1825 02	1	COMPRESSION SPRING	20-30N
4	4230 1826 00	1	COMPRESSION SPRING	38-55N
3	4230 1820 00	1	SOCKET HOLDER	1/2'' ±0mm 50mm travel WM5 thru hole
2	4230 1635 84	1	FRONT PART	QMX50
1	4230 3083 00	1	QST50-150CTTA	Max torque 150 Nm. Max speed 380rpm.





Tolerances, if not indicated, according to:		-		-		-		-		-	
AC-STD		-		-		-		-		-	
Name QST50-150CTTA-T50-L137-H13								QSTTA		Secrecy class	
Material -								1102 K/-			
-								CAD Pro/E			
		Scale 1:2		Format A3		Family MK2_G		Compare -		Drawing owner TOO	
		Drawn PLK		Blank -		Replaces					
Transferred from -		Cons.class 1295 K/-		Rev 4		Status RELEASED		Designation		Sheet 1 (2)	
		Mass/Volume 5.9 kg		Date 2007-05-07		8435 6050 70					

4	-	New connector: Motor & Transducer replaced = MK2	2013-03-07	ASH
Note	Pos.	Modified from	Date	Intr.

Model name	8435605070	Rev.Ver	4.2
Drawing name	8435605070	Rev.Ver	4.2

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

Note	4	-	New connector: Motor & Transducer replaced = MK2	2013-03-07	ASH
	Pos.	Modified from		Date	Intr.

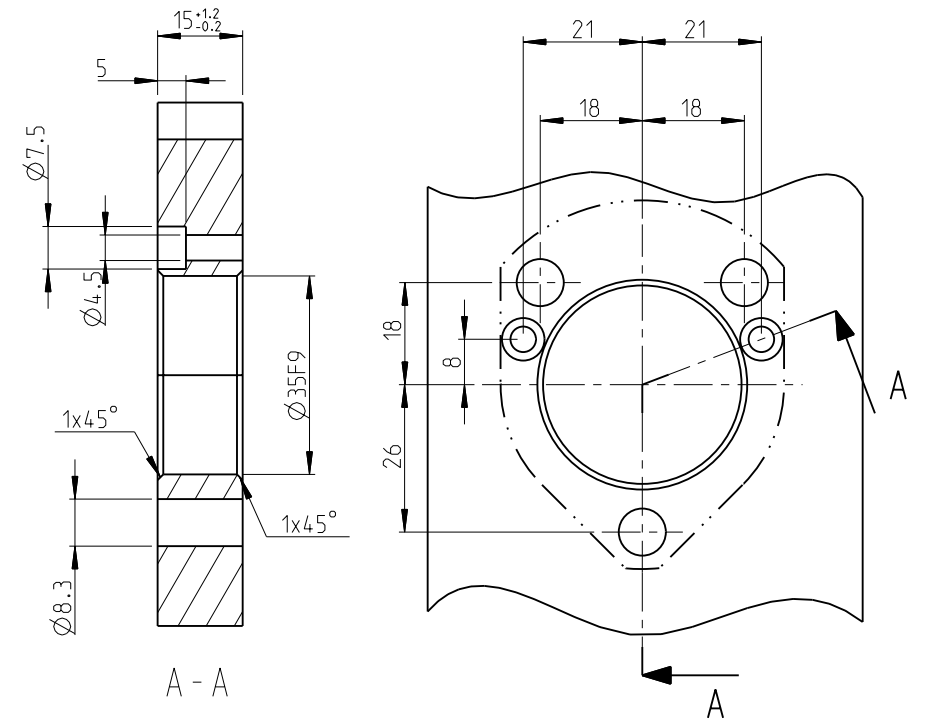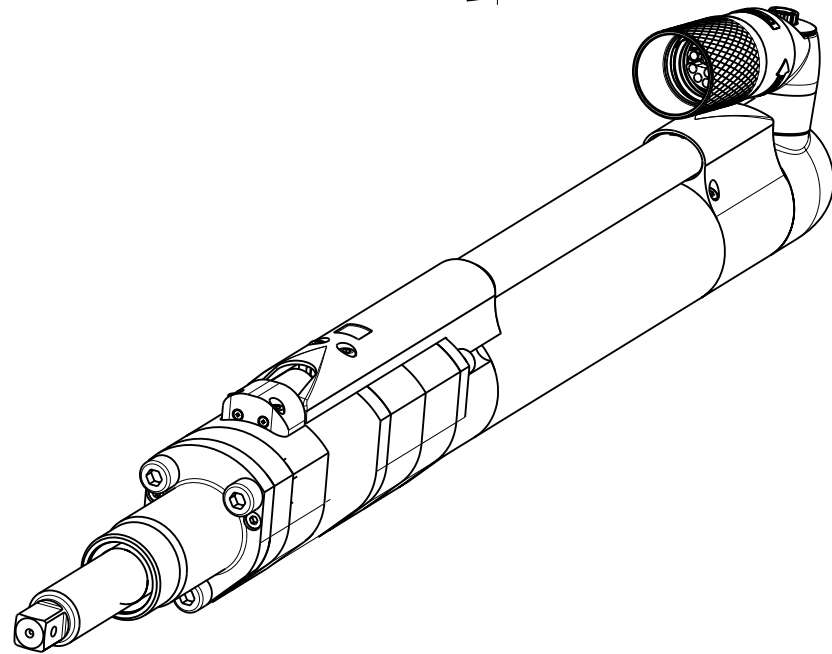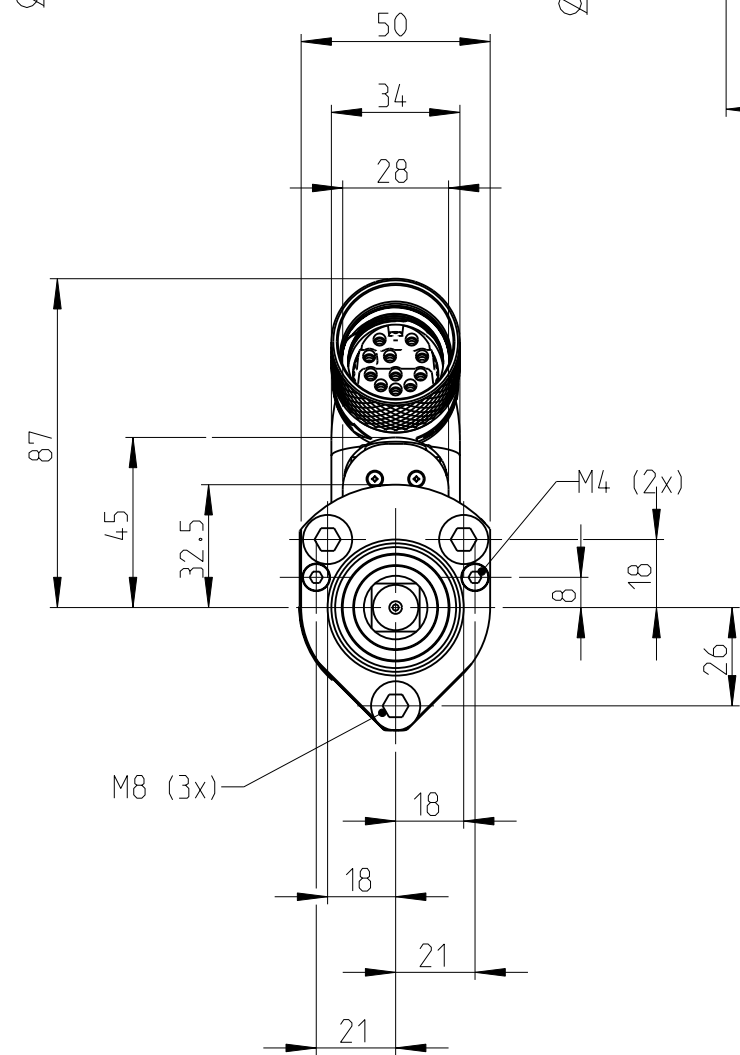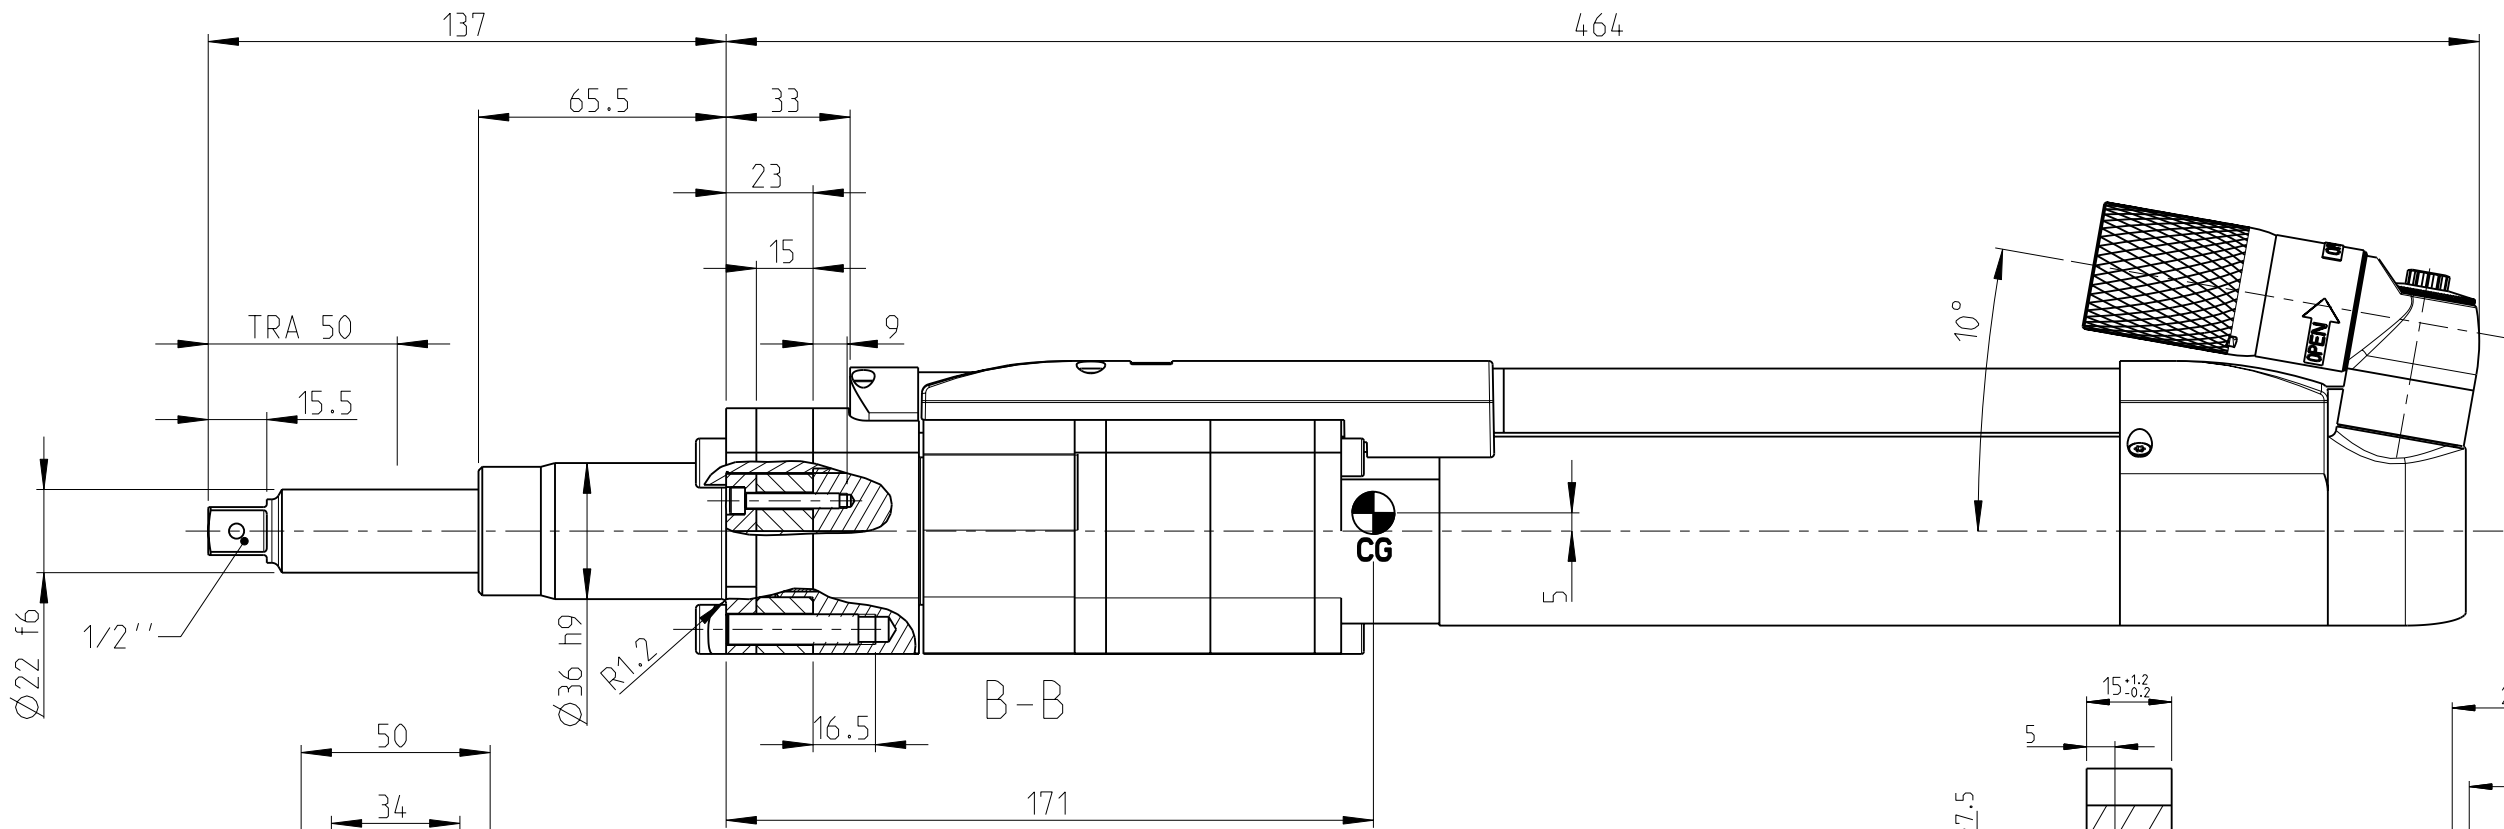

HOLES MUST BE DRILLED IN BASE PLATE FOR OUTSIDE FITTED FRONT PART.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST50-150CTTA-T50-L137-H13					QSTTA	Secrecy class
Material -					1102 K/-	
-					CAD Pro/E	
	Scale	1:2	Format	A3	Family	MK2_G
	Drawn	PLK	Blank	-	Compare	-
	Cons.class	1295 K/-	Rev	4	Status	RELEASED
Transferred from	-	Mass/Volume	5.9 kg	Date	2007-05-07	Designation
					8435	6050 70
					Sheet 2 (2)	
					Drawing owner	
					TOO	