


*FOR GREASE INSTRUCTION SEE PZ4113

Strongest compression spring mounted at delivery
Comment: Max torque 150 Nm. Max speed 450 r.p.m

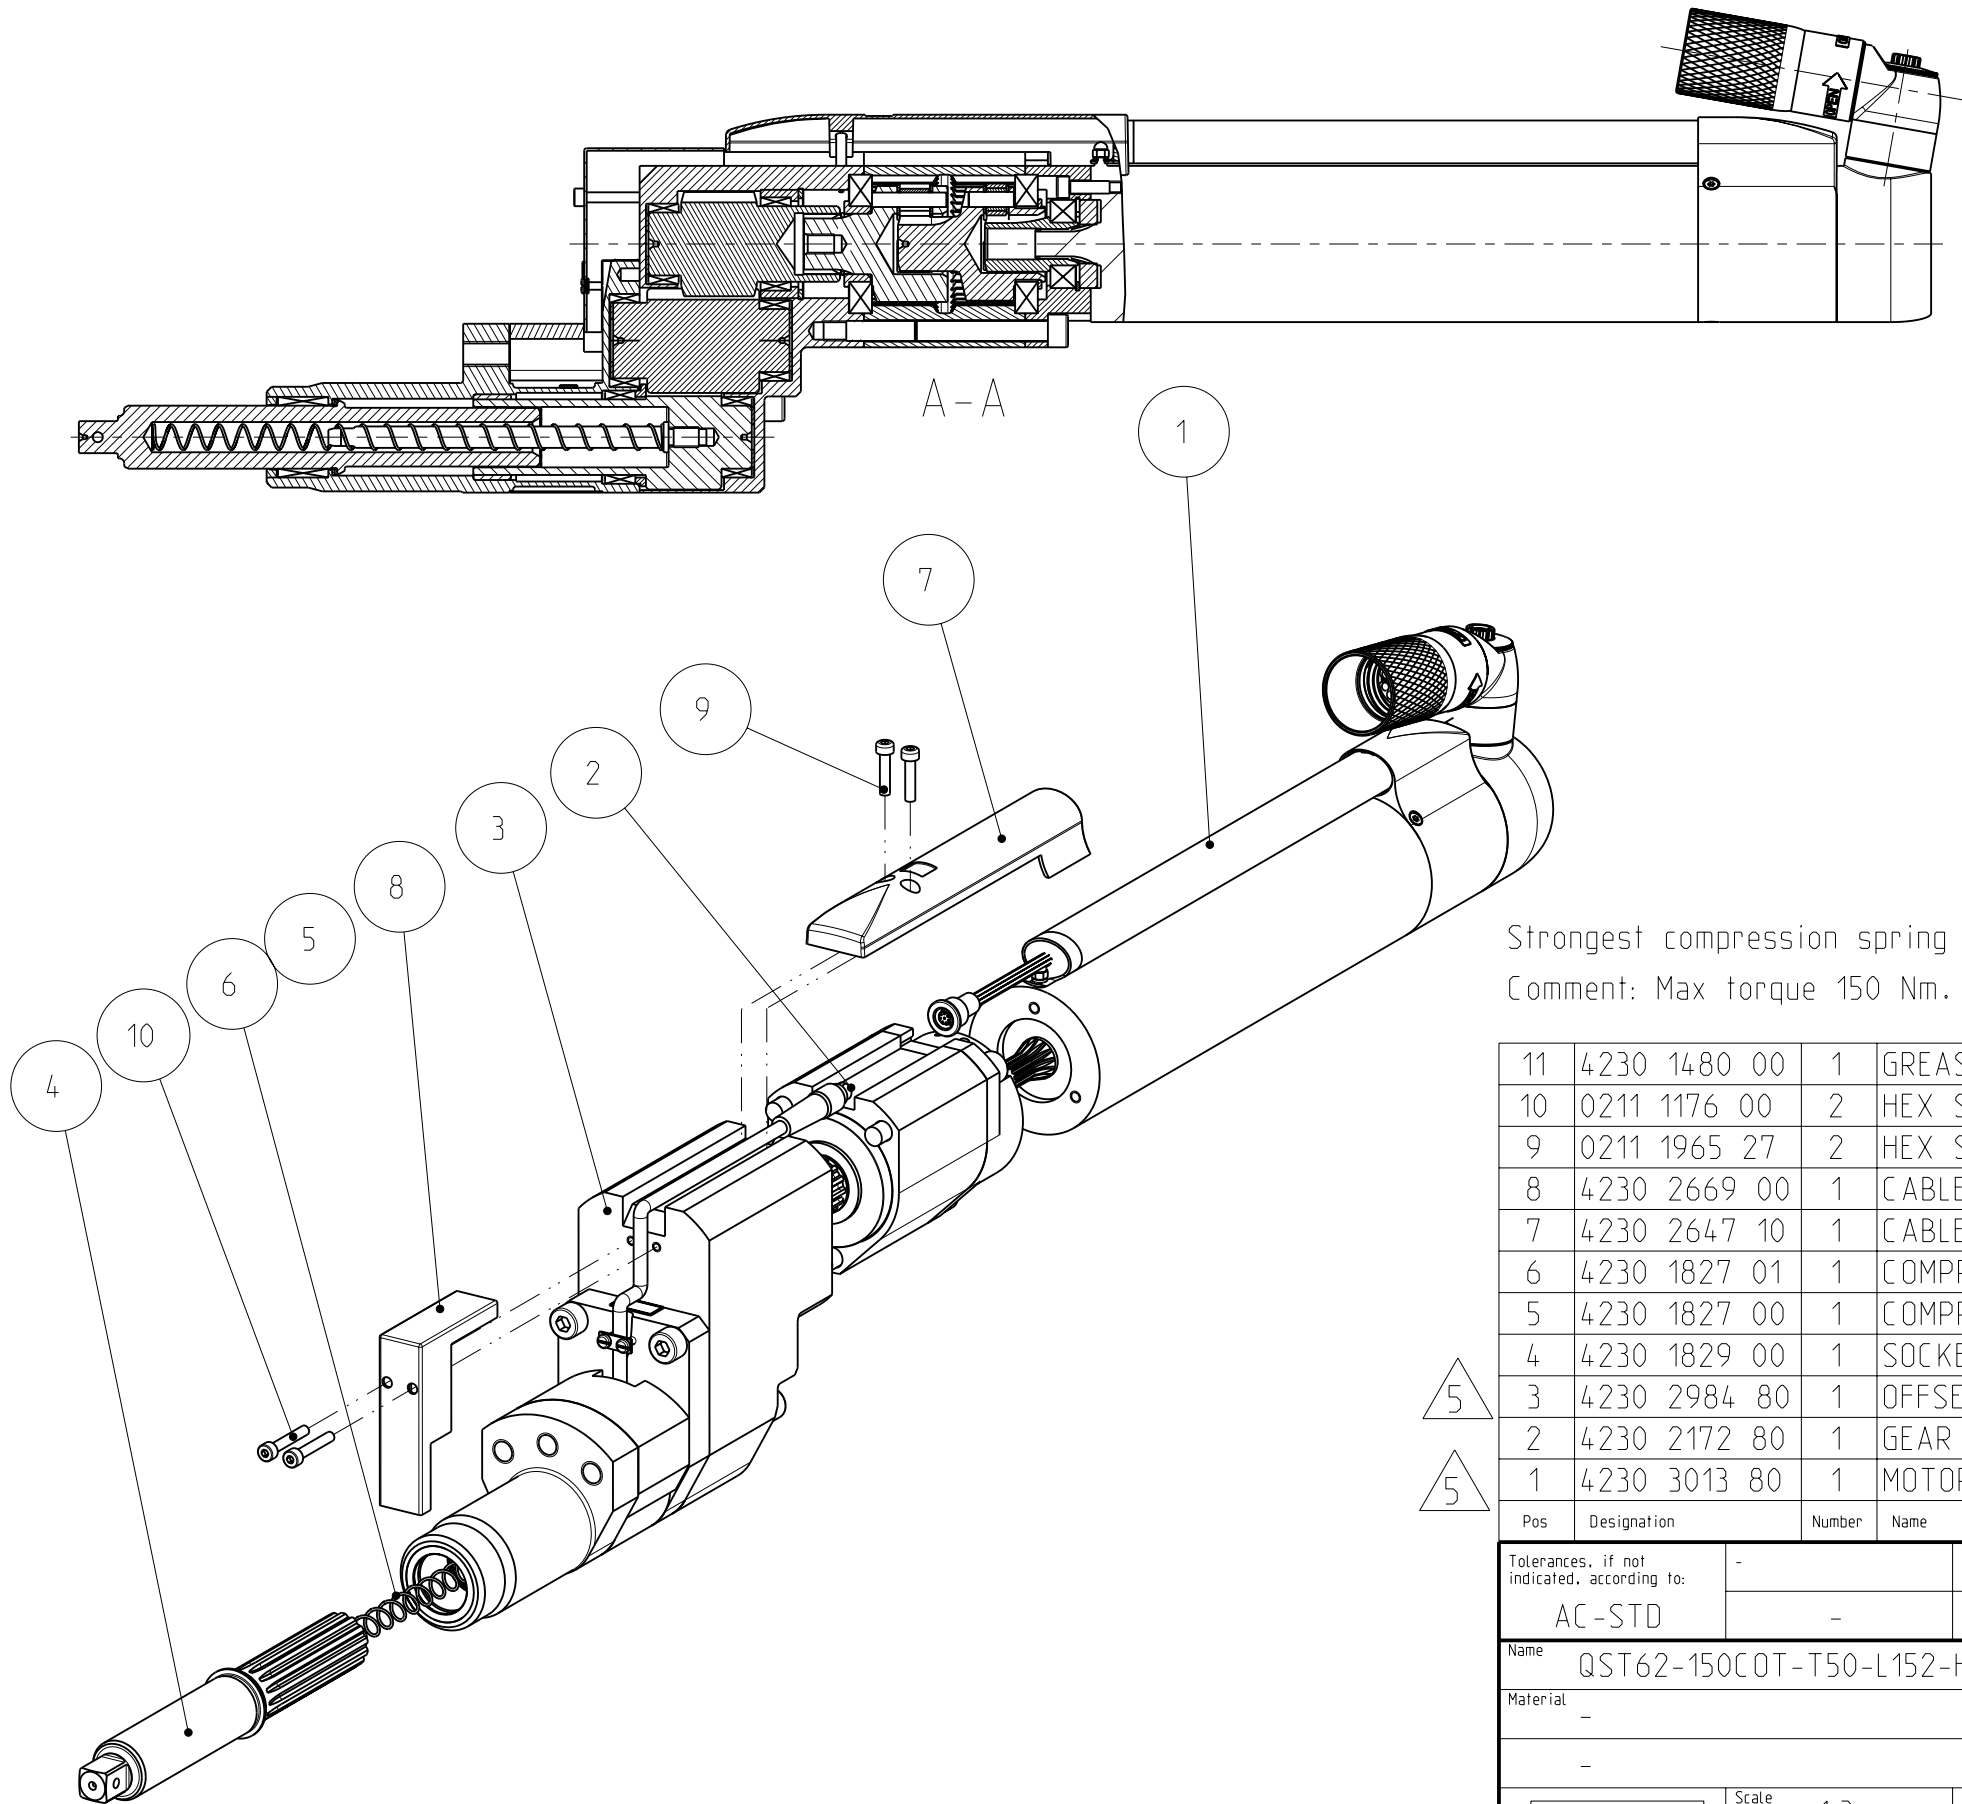

11	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
10	0211 1176 00	2	HEX SOCK SCREW	MC6S M4x25 12.9
9	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9
8	4230 2669 00	1	CABLERAIL	QST62-COT
7	4230 2647 10	1	CABLE RAIL	QST 62
6	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N
5	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N
4	4230 1829 00	1	SOCKET HOLDER	QMX62 +0 tra.50 1/2"
3	4230 2984 80	1	OFFSET GEAR	QDOT62-200 i=1.00 300Nm
2	4230 2172 80	1	GEAR UNIT	QMX62: l=13.94 ((41/15+1)*(41/15+1))
1	4230 3013 80	1	MOTOR	QST 62
Pos	Designation	Number	Name	Comment


Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name	QST62-150COT-T50-L152-H13				Secrecy class
Material	-				1102 K/-
	-				CAD Pro/E
Scale	1:3	Format	A3	Family	MK2_G 5
Drawn	tooten		Blank	-	
Transferred from	SW		Cons.class	1295 K/-	Rev 5
			Mass/Volume	13.2 kg	
			Status	RELEASED	
			Date	2006-12-18	
			Designation	8435 6060 20	
				Sheet 1 (2)	

5	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	ASH
Note	Pos.	Modified from	Date	Intr.

Model name	8435606020	Rev.Ver	5.0+
Drawing name	8435606020	Rev.Ver	5.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

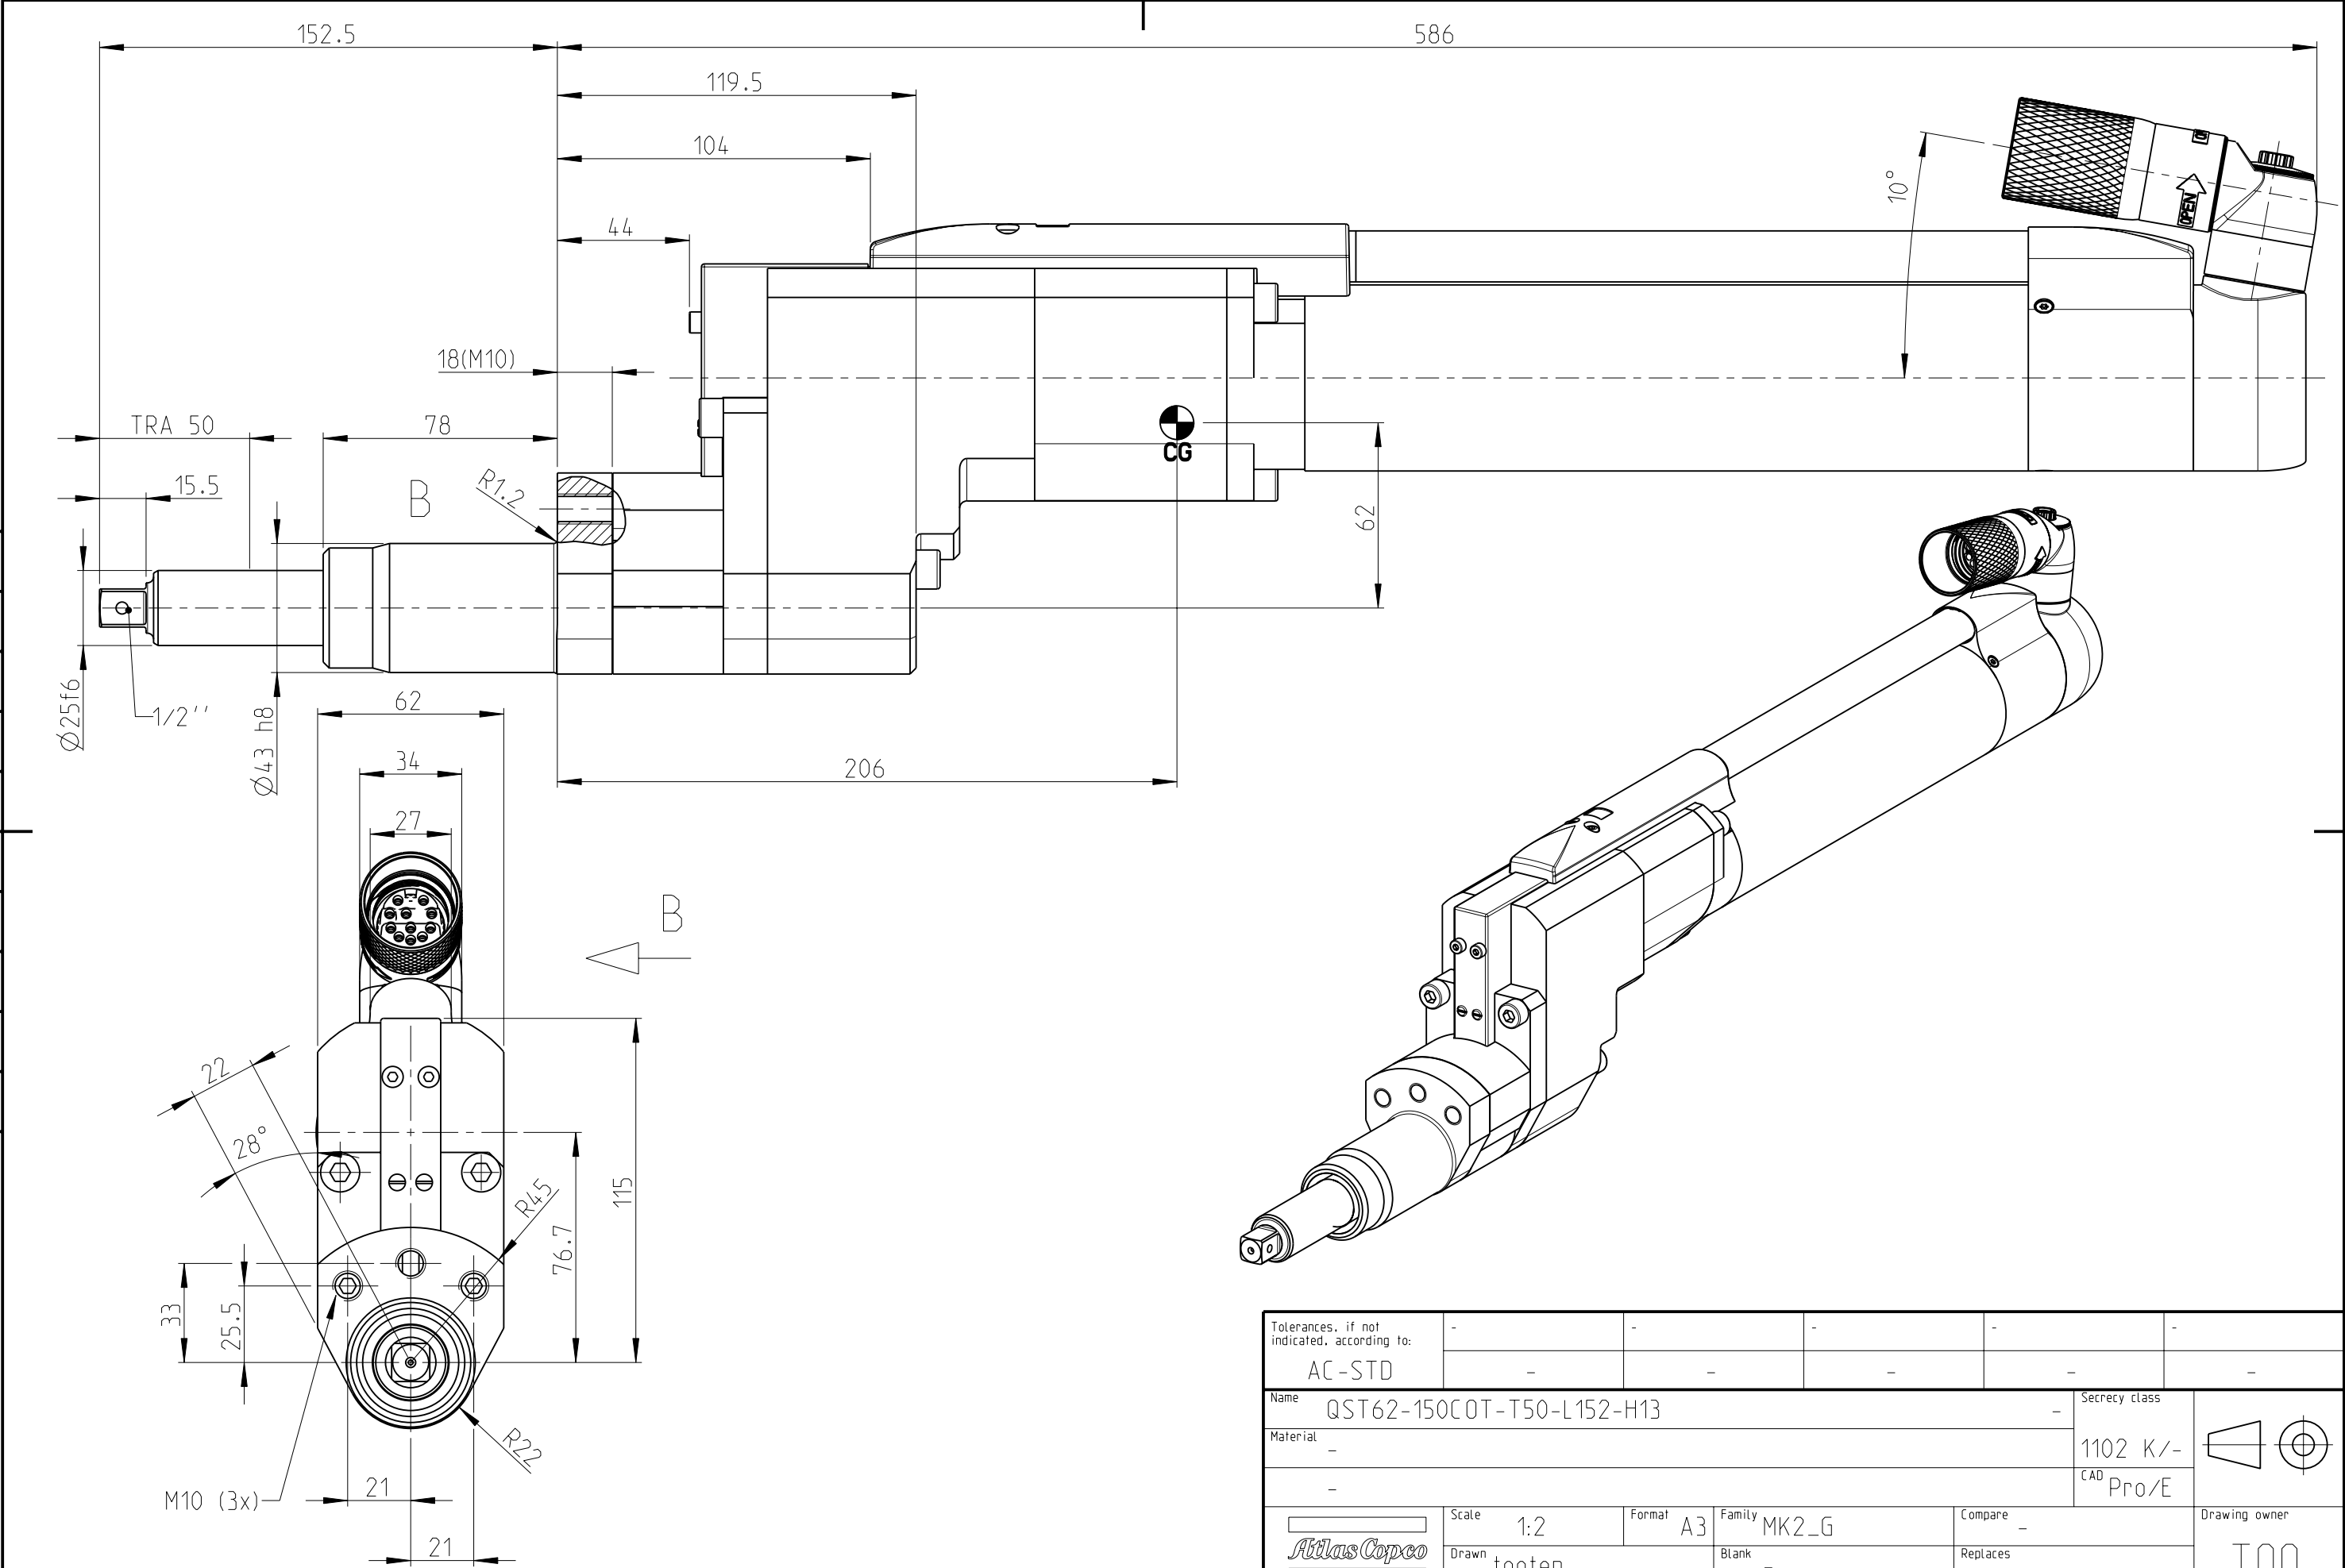

5	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	ASH
Note	Pos.	Modified from	Date	Intr.

Tolerances, if not indicated, according to:					-	-	-	-	-
AC-STD					-	-	-	-	-
Name					QST62-150COT-T50-L152-H13				
Material					-				
-					-				
Scale					1:2	Format	A3	Family	MK2_G
Drawn					tooten	Blank	-	Compare	-
Cons.class					1295 K/-	Rev	5	Status	RELEASED
Transferred from					SW	Mass/Volume	13.2 kg	Date	2006-12-18
-					-				
Designation					8435 6060 20				
Drawing owner					T00				
Sheet 2 (2)									