
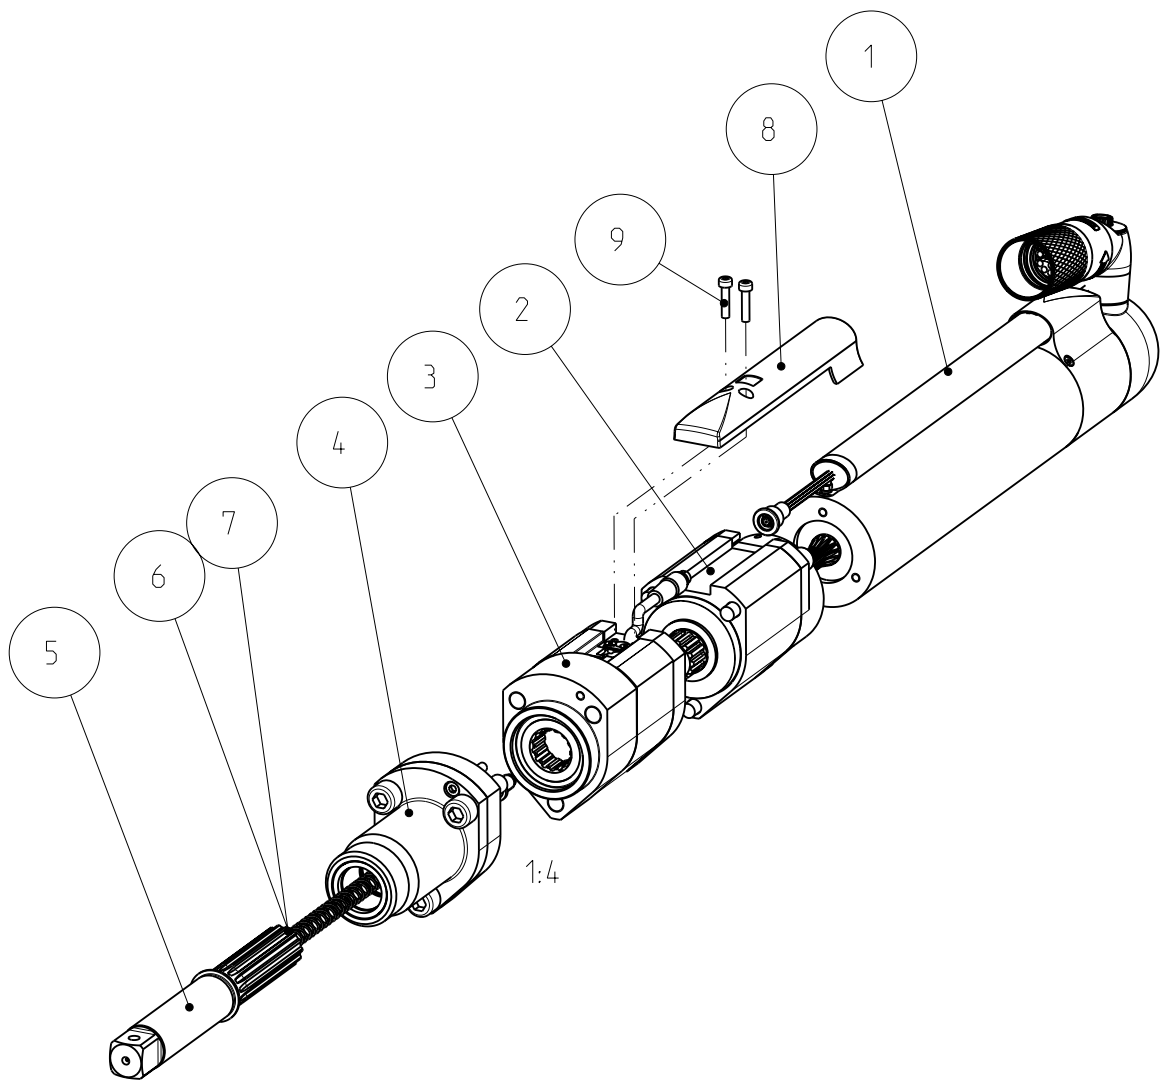


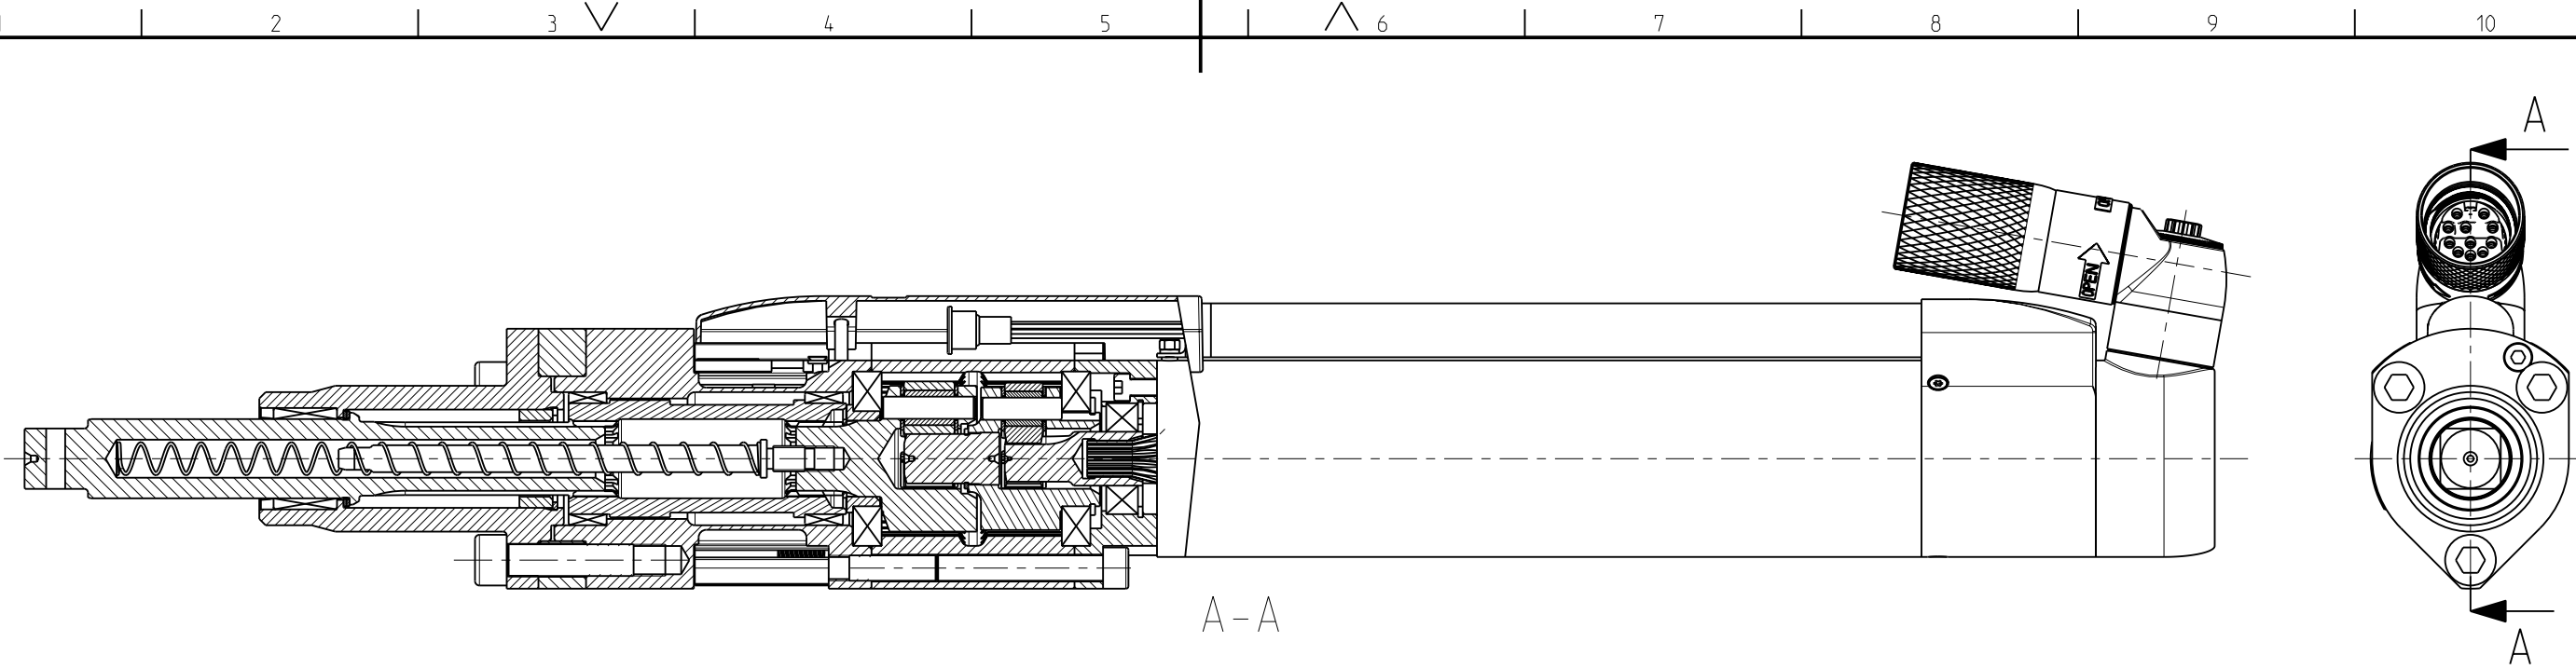

* FOR GREASE INSTRUCTIONS SEE PZ4113

Strongest compression spring mounted at delivery
Comment: Max torque 350Nm. Max speed 220 rpm.

5
5

10	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
9	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9
8	4230 2647 10	1	CABLE RAIL	QST 62
7	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N
6	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N
5	4230 1822 00	1	SOCKET HOLDER	QMX62: 3/4" 0mm 50mm travel QM62 thru hole.
4	4230 1602 83	1	FRONT PART	QMX62
3	4230 2964 80	1	TRANSDUCER SET	QDT62-200
2	4230 2172 82	1	GEAR UNIT	QMX62: 350Nm.i=28.33 ((41/9+1)•(41/10+1))
1	4230 3013 80	1	MOTOR	QST 62

Pos	Designation	Number	Name	Comment
	Tolerances, if not indicated, according to:	-	-	-
	AC-STD	-	-	-

Name QST62-350CT-T50-L152-H19				QST		Secrecy class	
Material -				1102 K/-		Drawing owner	
-				CAD Pro/E		T00	
Scale 9:20		Format A3		Family MK2_G		Compare -	
Drawn tooten		Blank -		Replaces -		Sheet 1 (2)	
Cons.class 1295 K/-		Rev 5		Status RELEASED		Designation	
Mass/Volume 10.4 kg		Date 2006-12-06		8435		6070 10	


5	-	New connector: Motor & Transducer replaced = MK2	2013-03-04	CSR
Note	Pos.	Modified from	Date	Intr.

Model name	8435607010	Rev.Ver	5.1
Drawing name	8435607010	Rev.Ver	5.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

5	-	New connector: Motor & Transducer replaced = MK2	2013-03-04	CSR
Note	Pos.	Modified from	Date	Intr.

Tolerances, if not indicated, according to:				-	-	-	-	-	
AC-STD				-	-	-	-	-	
Name QST62-350CT-T50-L152-H19							QST	Secrecy class	
Material -							1102 K/-		
-							CAD Pro/E		
Atlas Copco		Scale 1:2	Format A3	Family MK2_G		Compare -		Drawing owner	
		Drawn tooten		Blank -		Replaces -		T00	
Transferred from -		Cons.class 1295 K/-	Rev 5	Status RELEASED		Designation		Sheet 2 (2)	
		Mass/Volume 10.4 kg		Date 2006-12-06		8435 6070 10			

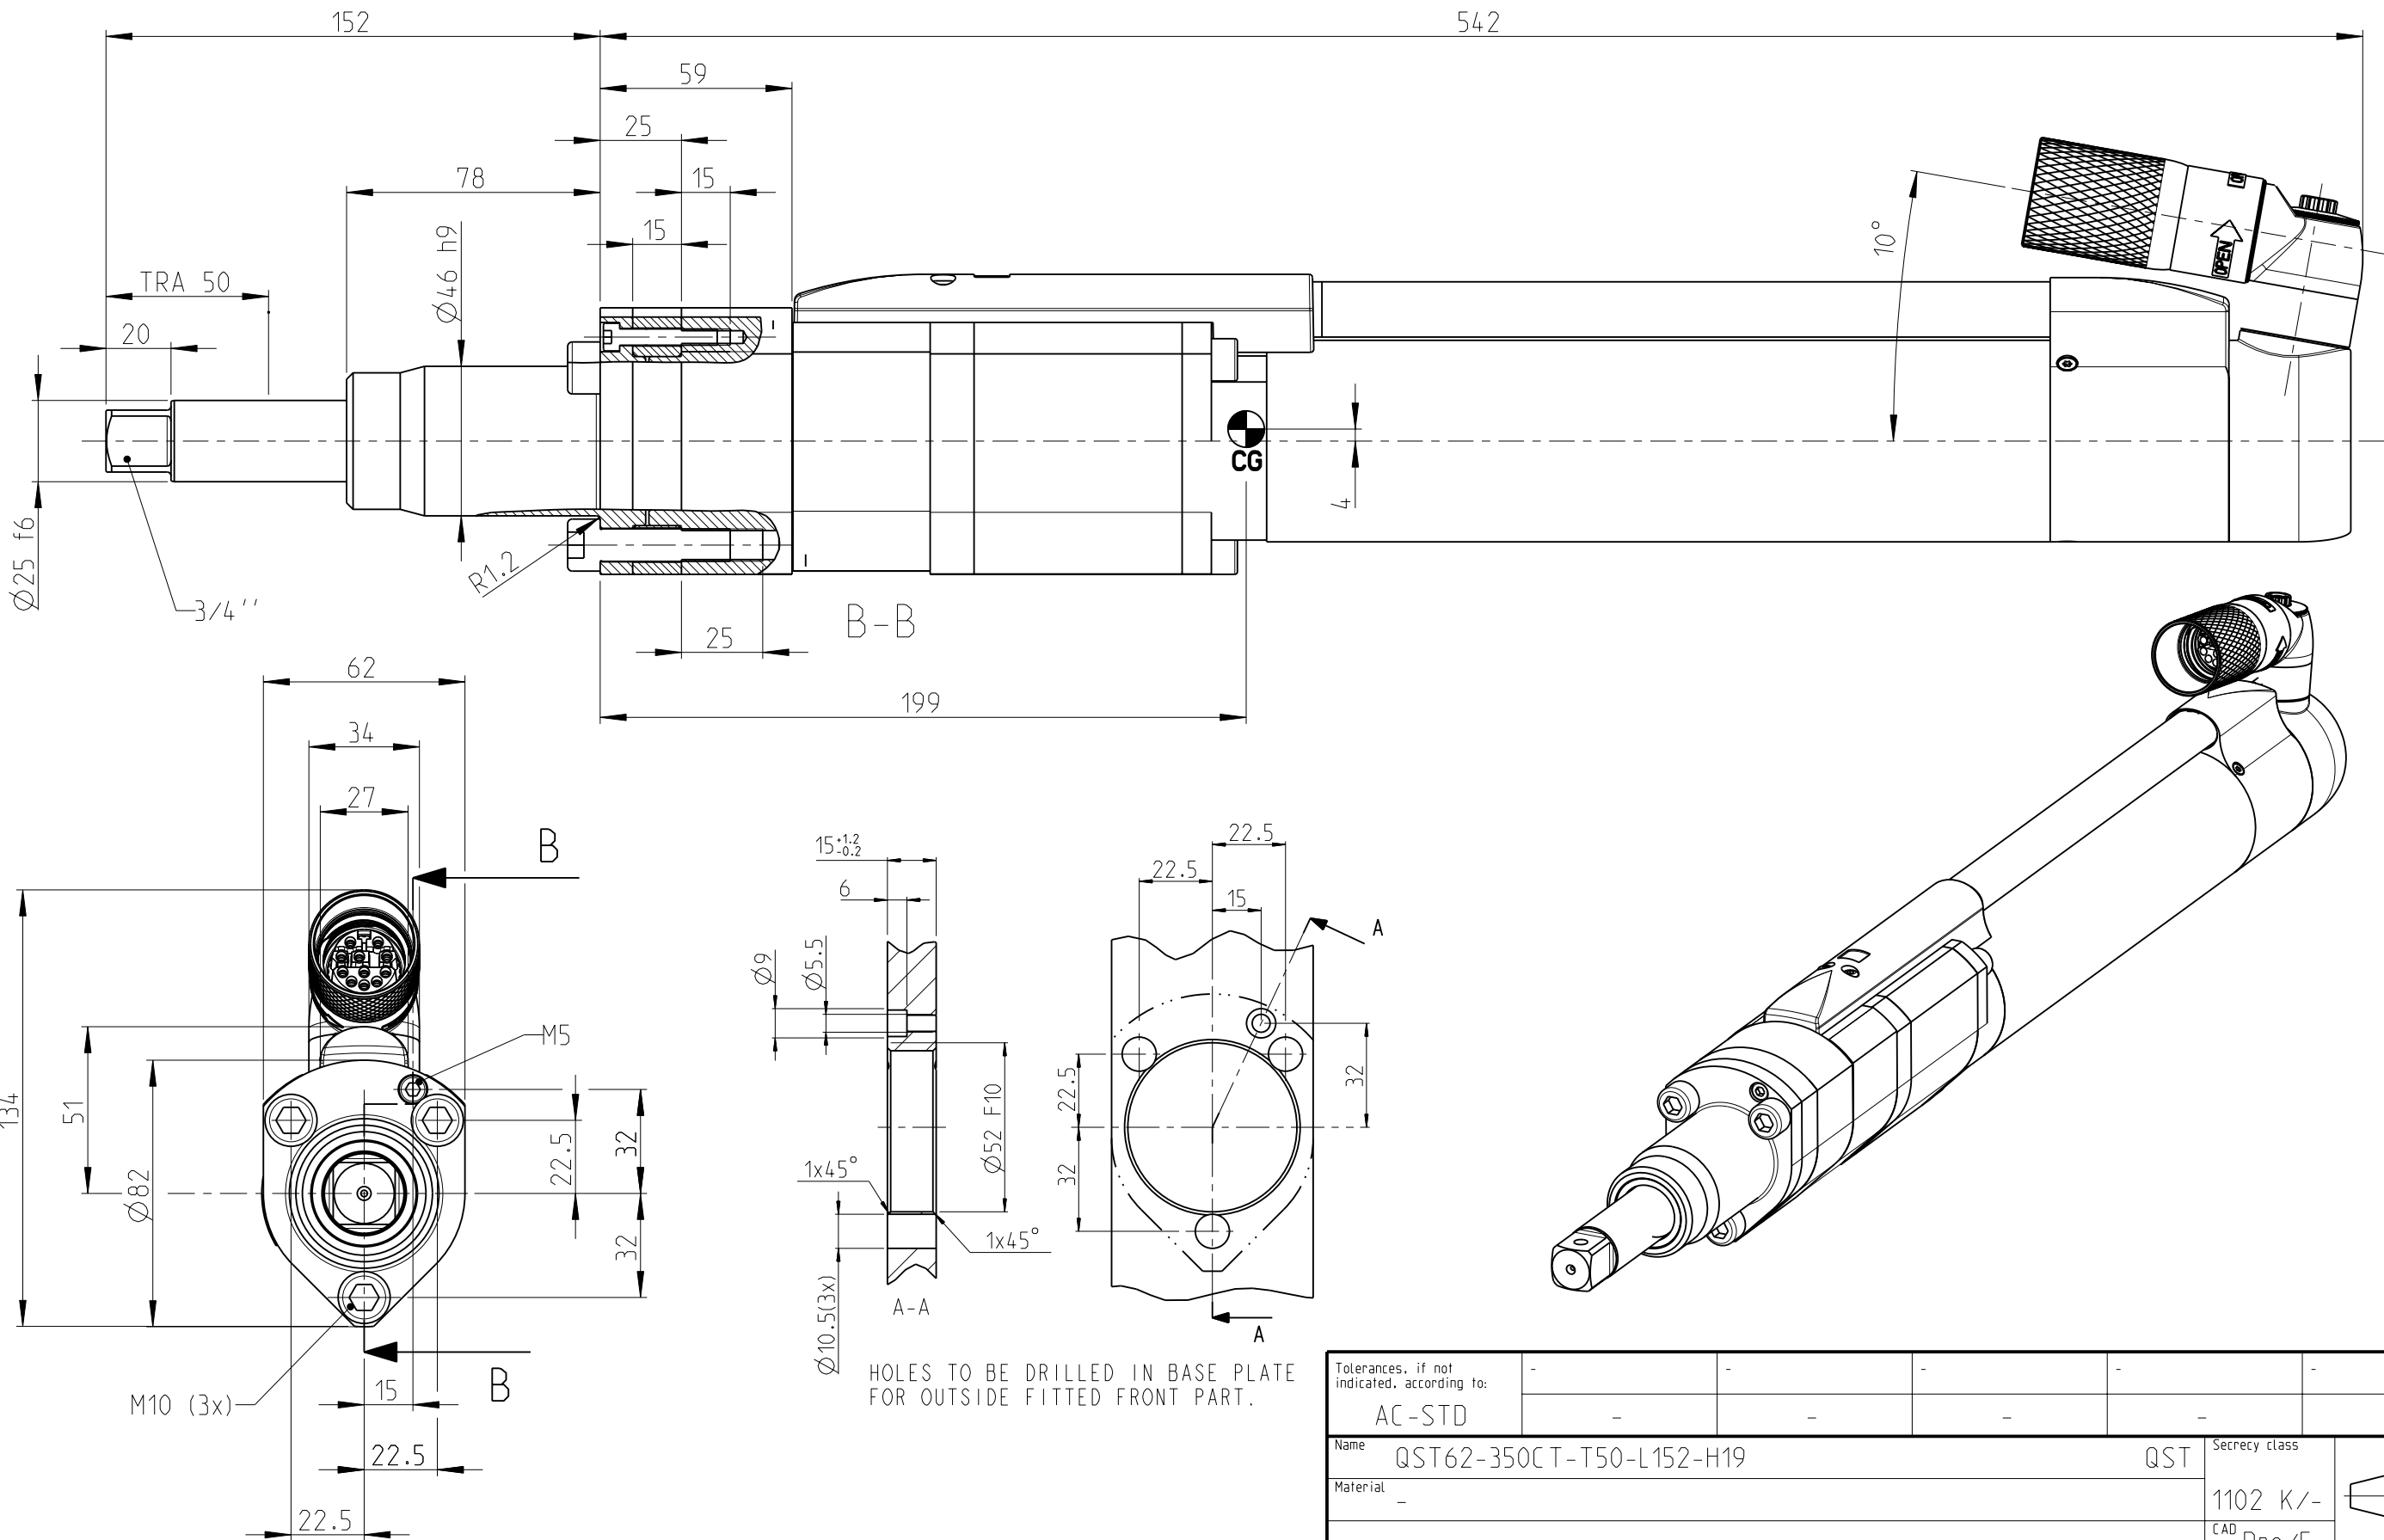

A
B
C
D
E
F
G