


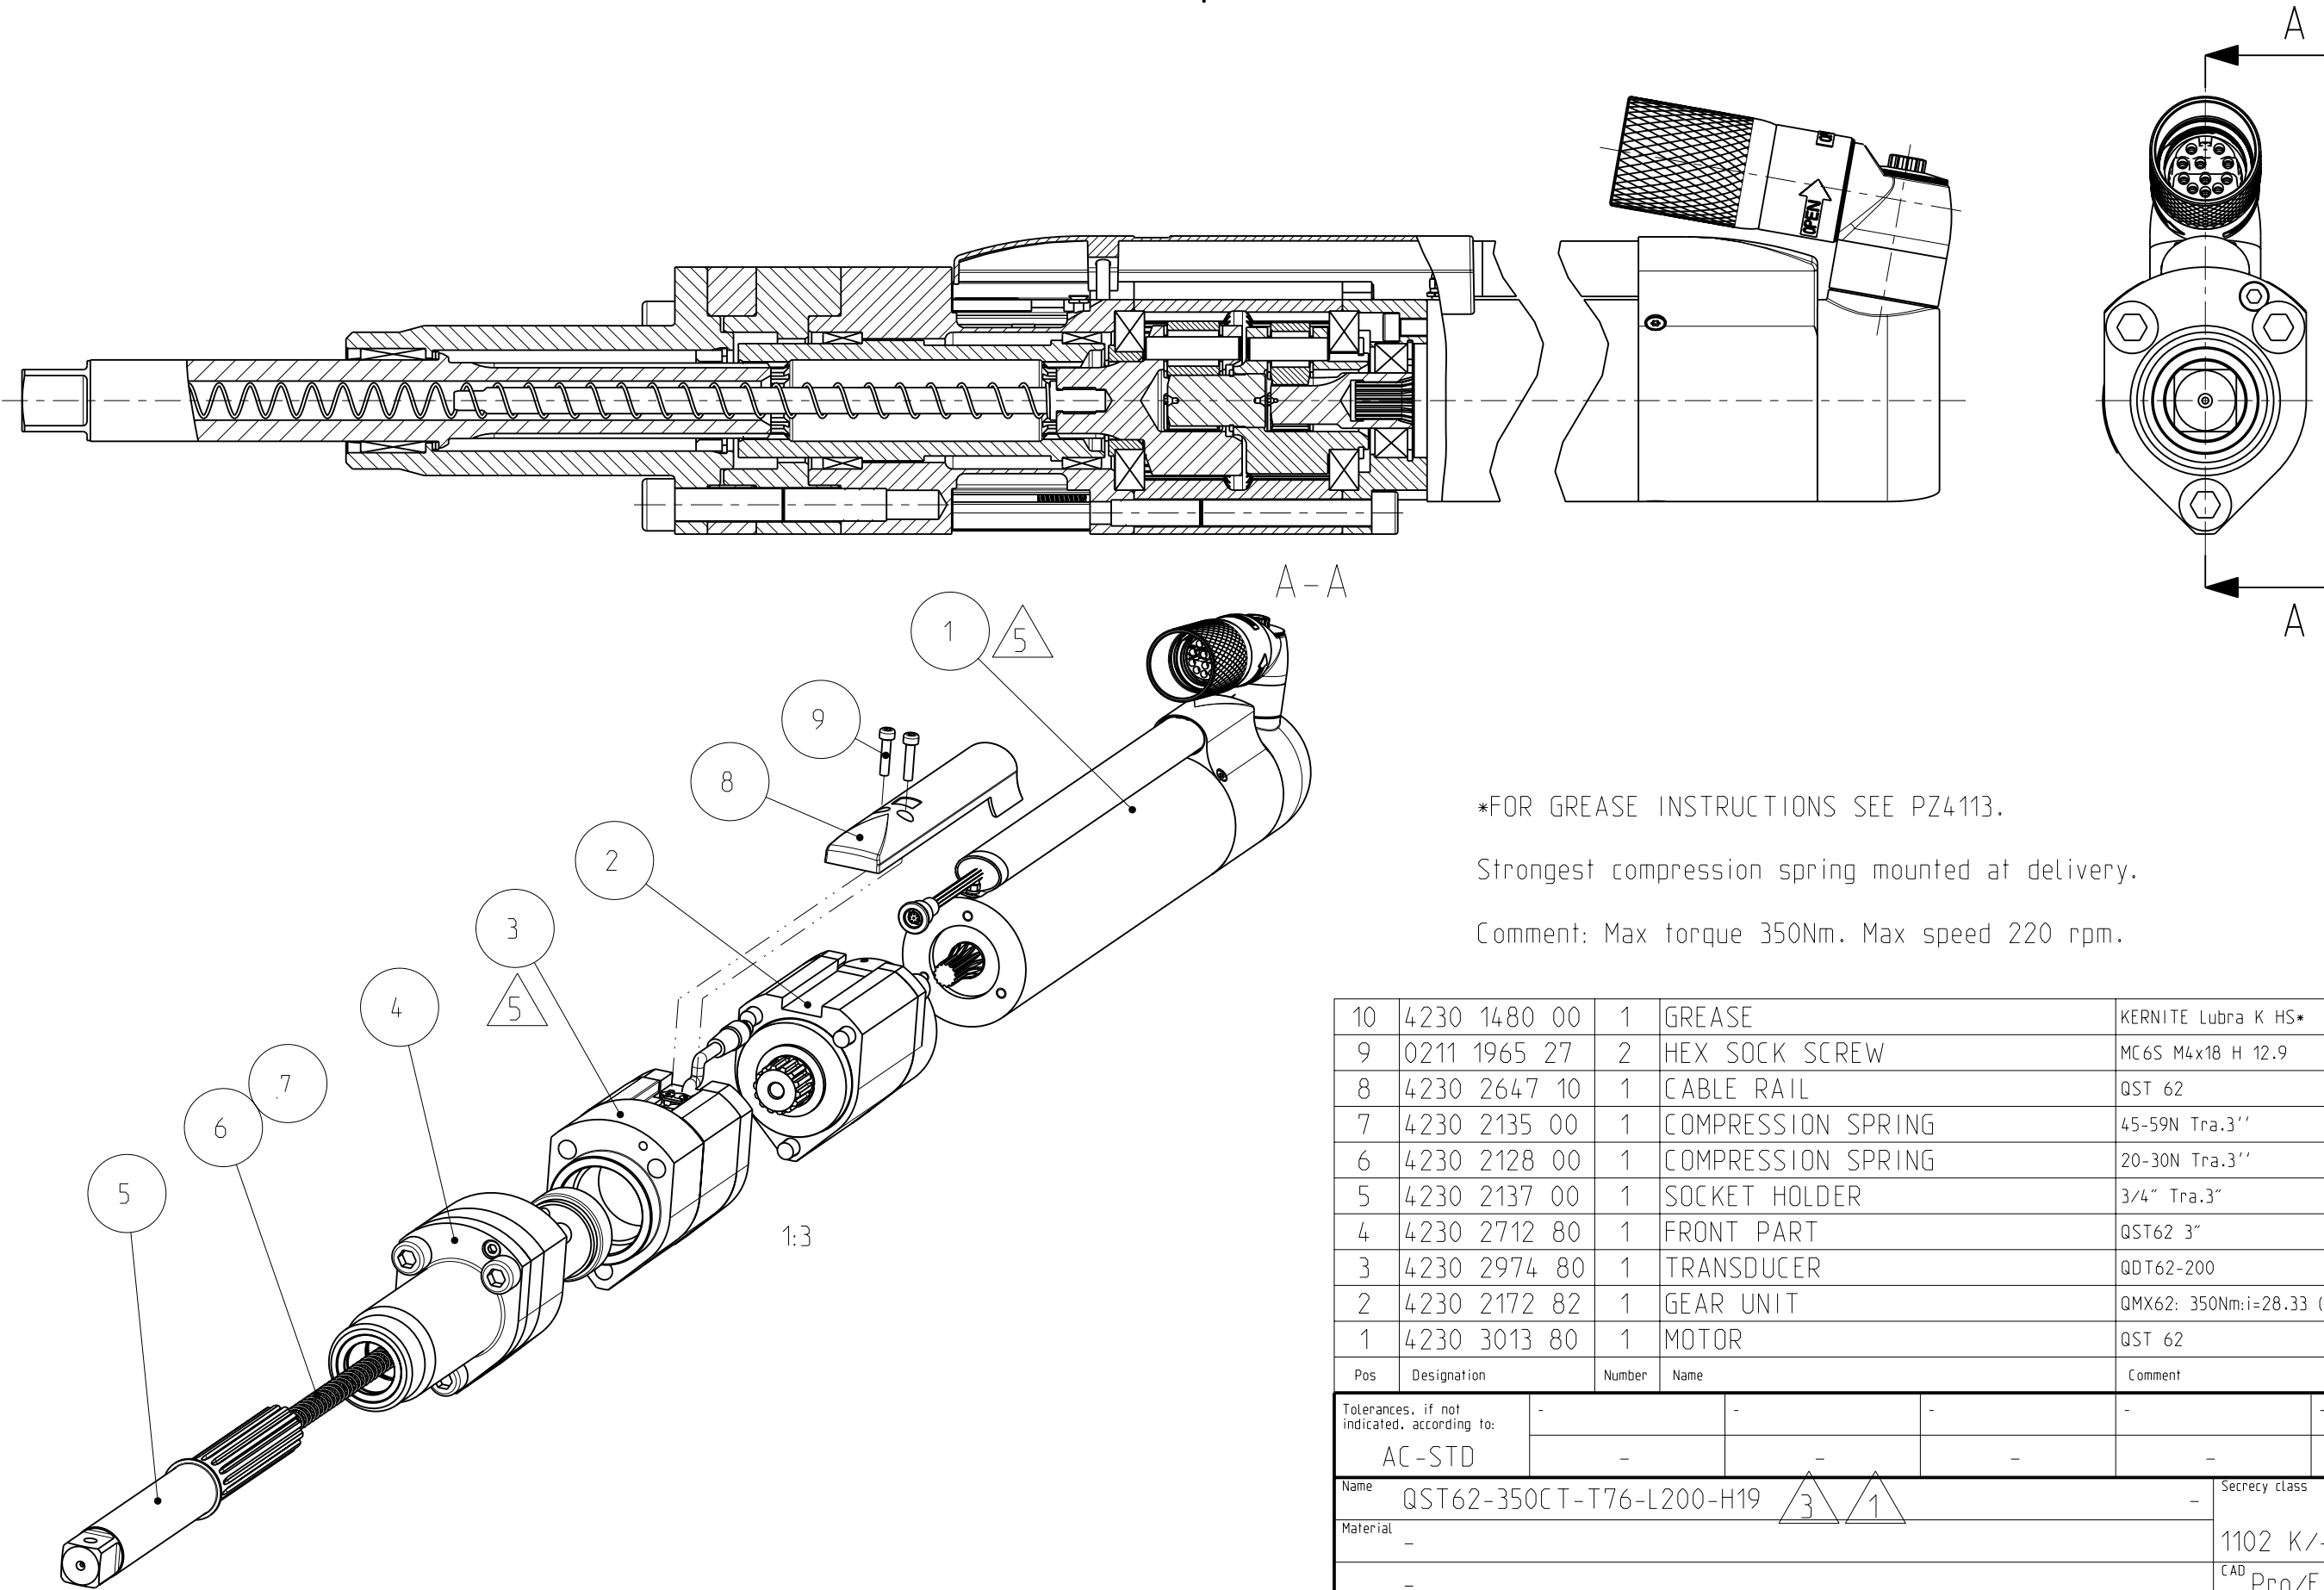

*FOR GREASE INSTRUCTIONS SEE PZ4113.

Strongest compression spring mounted at delivery.

Comment: Max torque 350Nm. Max speed 220 rpm.

10	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
9	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9
8	4230 2647 10	1	CABLE RAIL	QST 62
7	4230 2135 00	1	COMPRESSION SPRING	45-59N Tra.3''
6	4230 2128 00	1	COMPRESSION SPRING	20-30N Tra.3''
5	4230 2137 00	1	SOCKET HOLDER	3/4" Tra.3"
4	4230 2712 80	1	FRONT PART	QST62 3"
3	4230 2974 80	1	TRANSDUCER	QDT62-200
2	4230 2172 82	1	GEAR UNIT	QMX62: 350Nm:i=28.33 ((41/9+1)•(41/10+1))
1	4230 3013 80	1	MOTOR	QST 62




Pos	Designation	Number	Name	Comment
	Tolerances, if not indicated, according to:	-	-	-
	AC-STD	-	-	-
Name	QST62-350CT-T76-L200-H19			Secrecy class
Material	-			1102 K/-
	-			CAD Pro/E
Scale	1:2	Format	A3	Family
Drawn	PLK	Blank	-	Compare
Transferred from	Cons.class	Rev	5	Status
	Mass/Volume	11.5 kg	4	Date
				2007-08-14
				8435 6070 11
				Sheet 1 (2)
				Drawing owner
				T00

5	-	New connector: Motor & Transducer replaced = MK2	2013-03-05	HPN
Note	Pos.	Modified from	Date	Intr.


Model name	8435607011	Rev.Ver	5.1+
Drawing name	8435607011	Rev.Ver	5.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

5	-	New connector: Motor & Transducer replaced = MK2	2013-03-05	HPN
Note	Pos.	Modified from	Date	Intr.

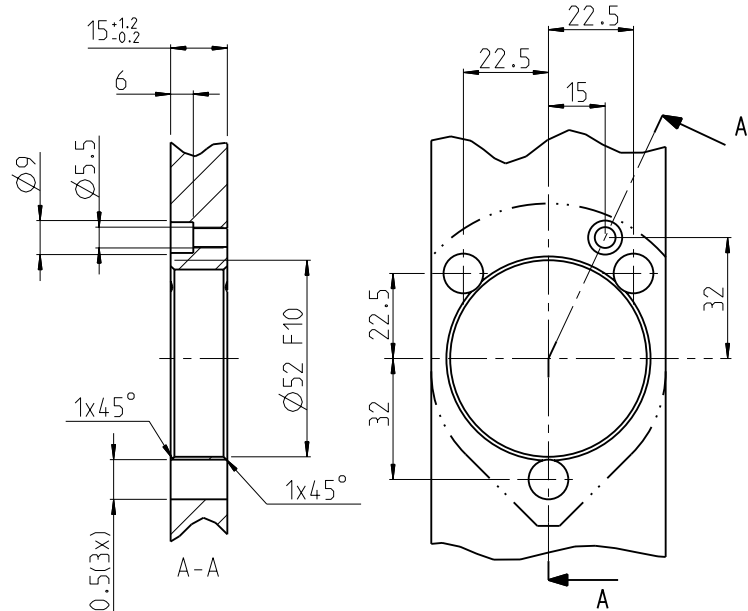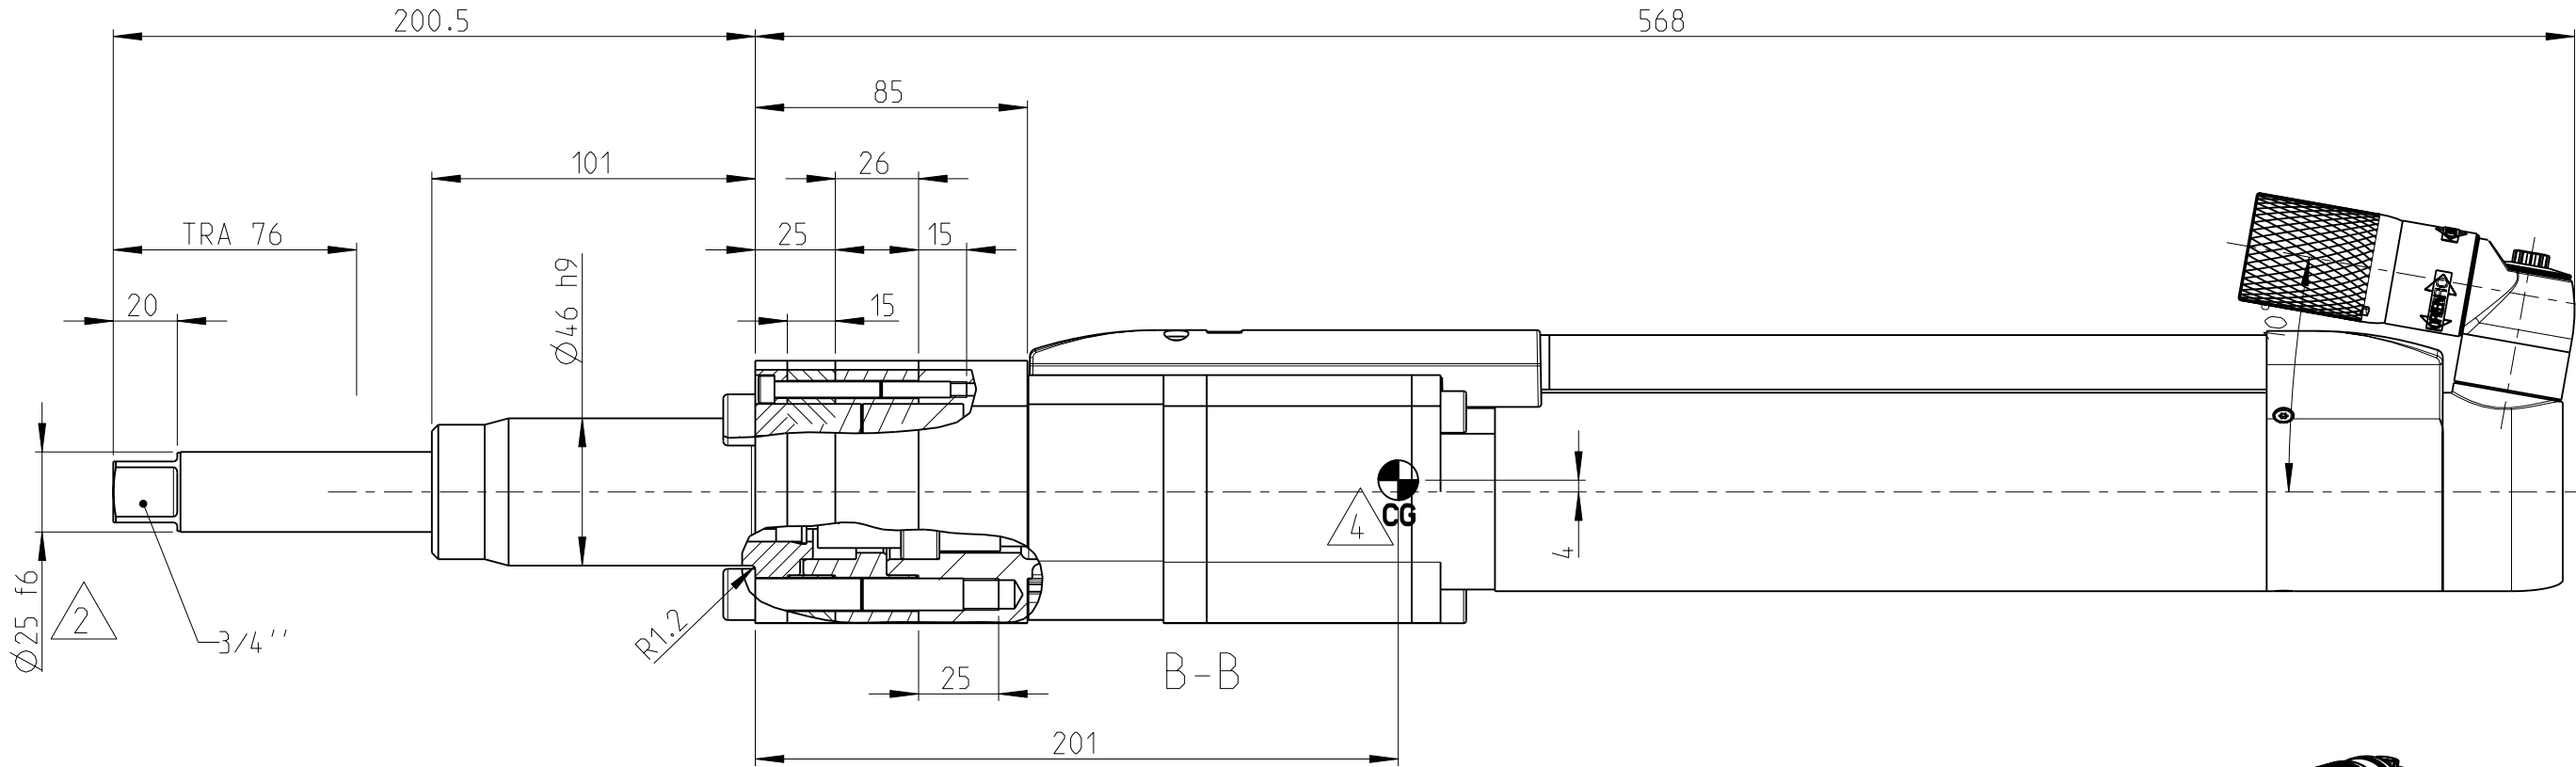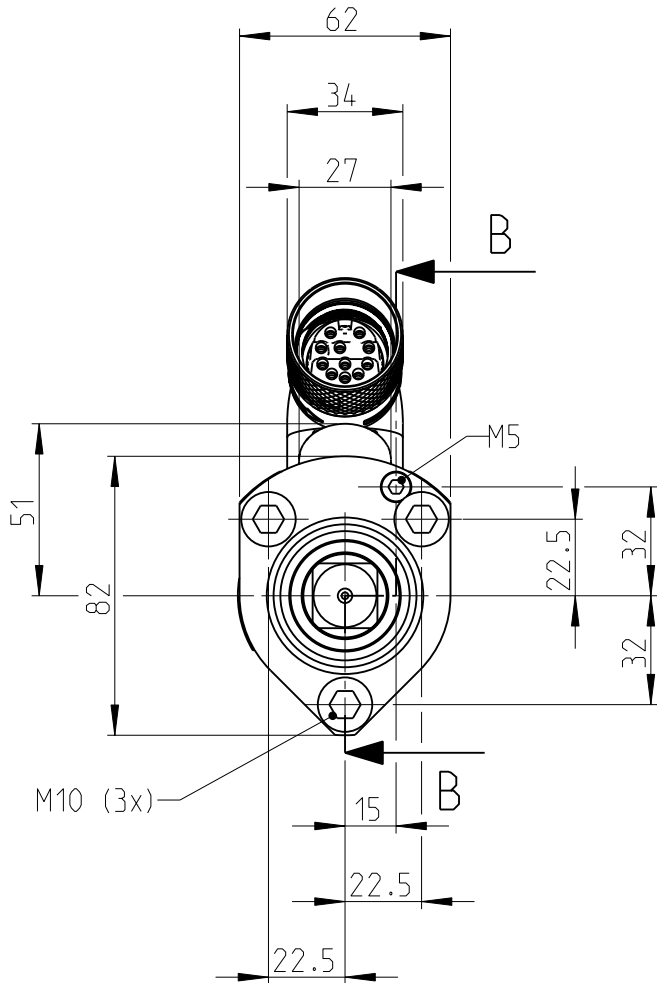

HOLES TO BE DRILLED IN BASE PLATE FOR OUTSIDE FITTED FRONT PART.

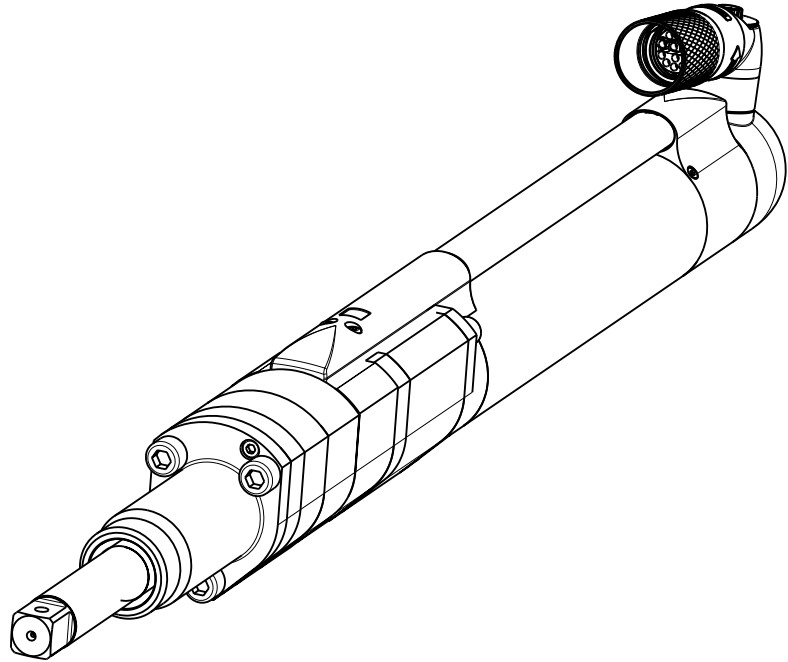

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST62-350CT-T76-L200-H19					Secrecy class	
Material					1102 K/-	
					CAD Pro/E	
					Scale 9:20	Format A3
					Family MK2_G	Compare -
					Blank -	Replaces -
					Cons.class 1295 K/-	Rev 5
					Status RELEASED	Designation
					Mass/Volume 11.5 kg	Date 2007-08-14
					8435 6070 11	
					Sheet 2 (2)	
					Drawing owner	
					T00	