


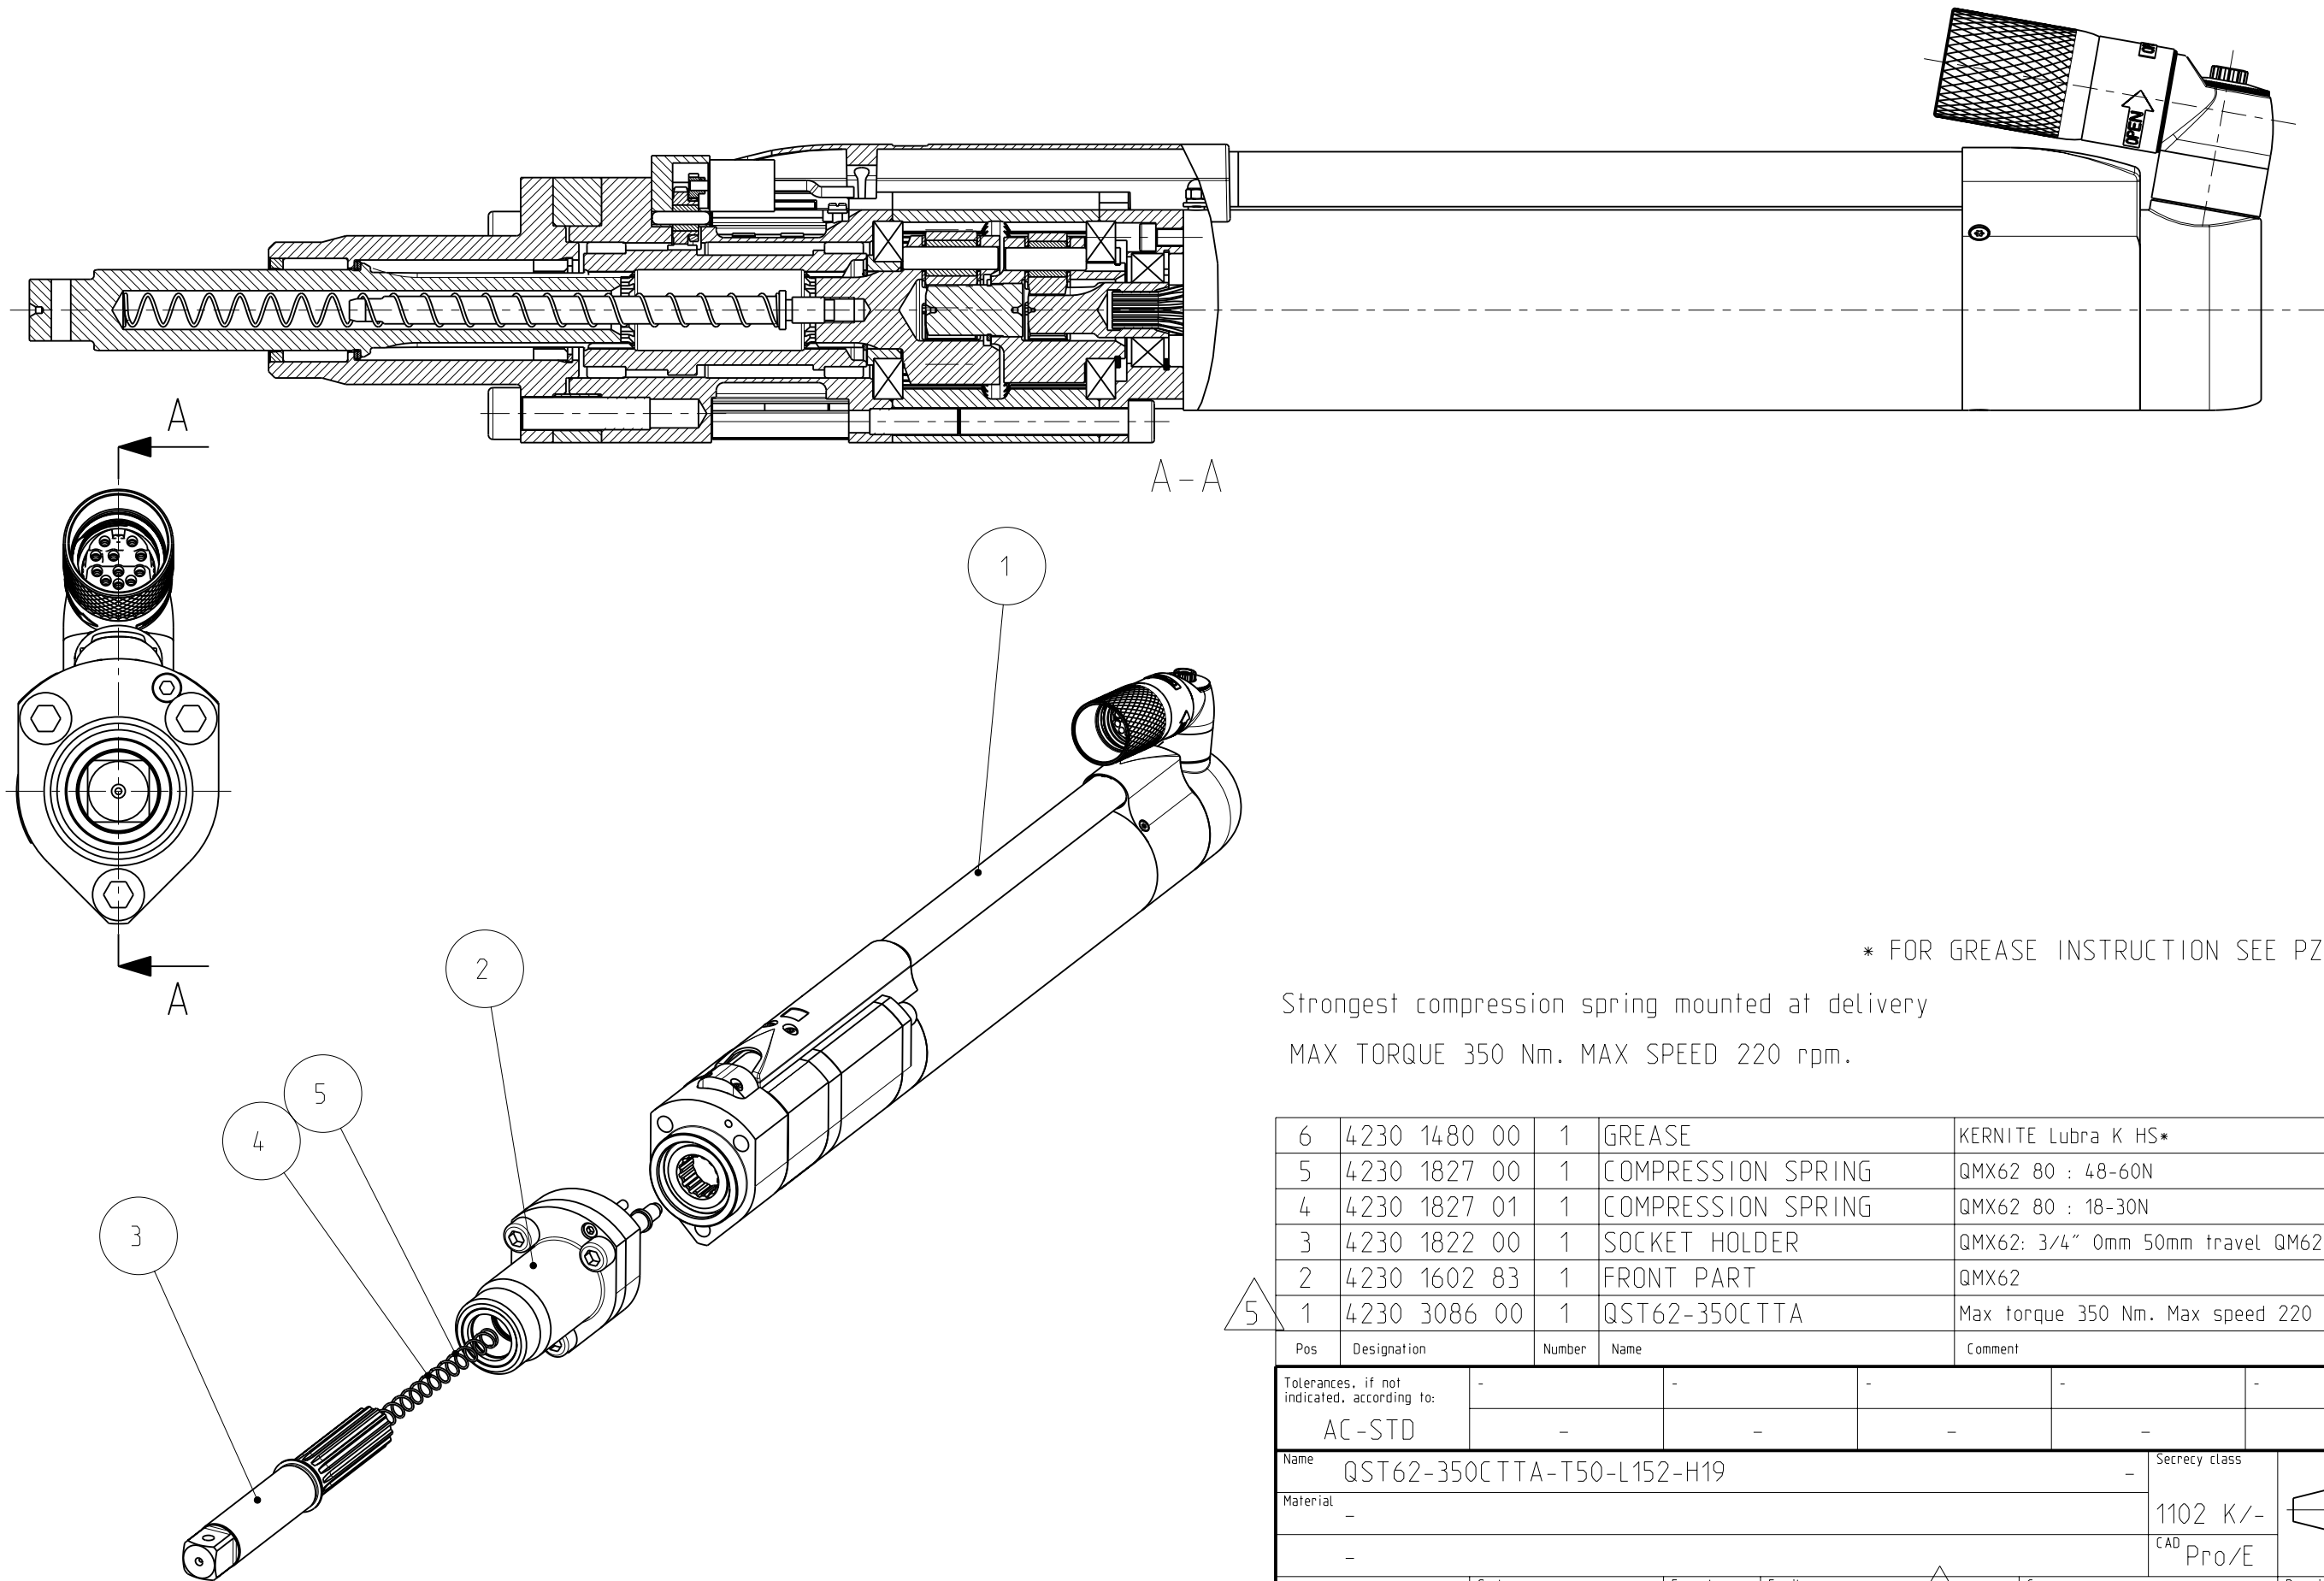

* FOR GREASE INSTRUCTION SEE PZ4113


Strongest compression spring mounted at delivery
MAX TORQUE 350 Nm. MAX SPEED 220 rpm.

6	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
5	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N
4	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N
3	4230 1822 00	1	SOCKET HOLDER	QMX62: 3/4" 0mm 50mm travel QM62 thru hole.
2	4230 1602 83	1	FRONT PART	QMX62
1	4230 3086 00	1	QST62-350CTTA	Max torque 350 Nm. Max speed 220 rpm.

Pos	Designation	Number	Name	Comment
5	AC-STD	-	-	-
Tolerances, if not indicated, according to:				-
Name				QST62-350CTTA-T50-L152-H19
Material				-
Scale				1:2
Format				A3
Family				MK2_G
Compare				-
Drawn				MEM
Blank				-
Replaces				-
Cons.class				1295 K/-
Rev				5
Status				RELEASED
Designation				8435 6070 70
Transferred from				-
Mass/Volume				10.4 kg
Date				2007-04-27

5	-	New connector: Motor & Transducer replaced = MK2	2013-03-06	ASH
Note	Pos.	Modified from	Date	Intr.

Rev. Ver 5.0+
Rev. Ver 5.1

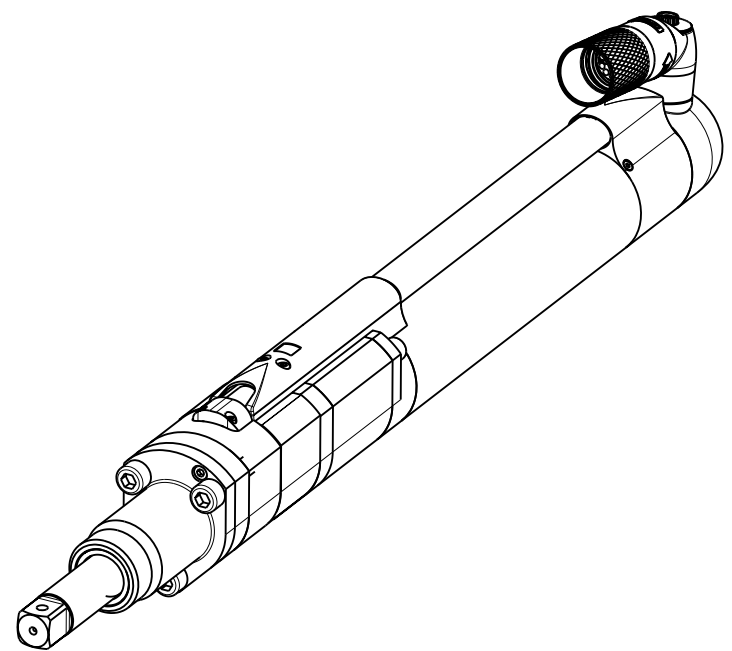[illegible]

5	-	New connector: Motor & Transducer replaced = MK2	2013-03-06	ASH
Note	Pos.	Modified from	Date	Intr.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST62-350CTTA-T50-L152-H19						Secrecy class
Material -						1102 K/-
-						CAD Pro/E
<i>Arlas Copco</i>		Scale 1:2	Format A3	Family MK2_G	Compare -	Drawing owner
Drawn MEM			Blank -	Replaces		T00
Transferred from -		Cons.class 1295 K/-	Rev 5	Status RELEASED	Designation 8435 6070 70	
		Mass/Volume 10.4 kg	Date 2007-04-27		Sheet 2 (2)	