
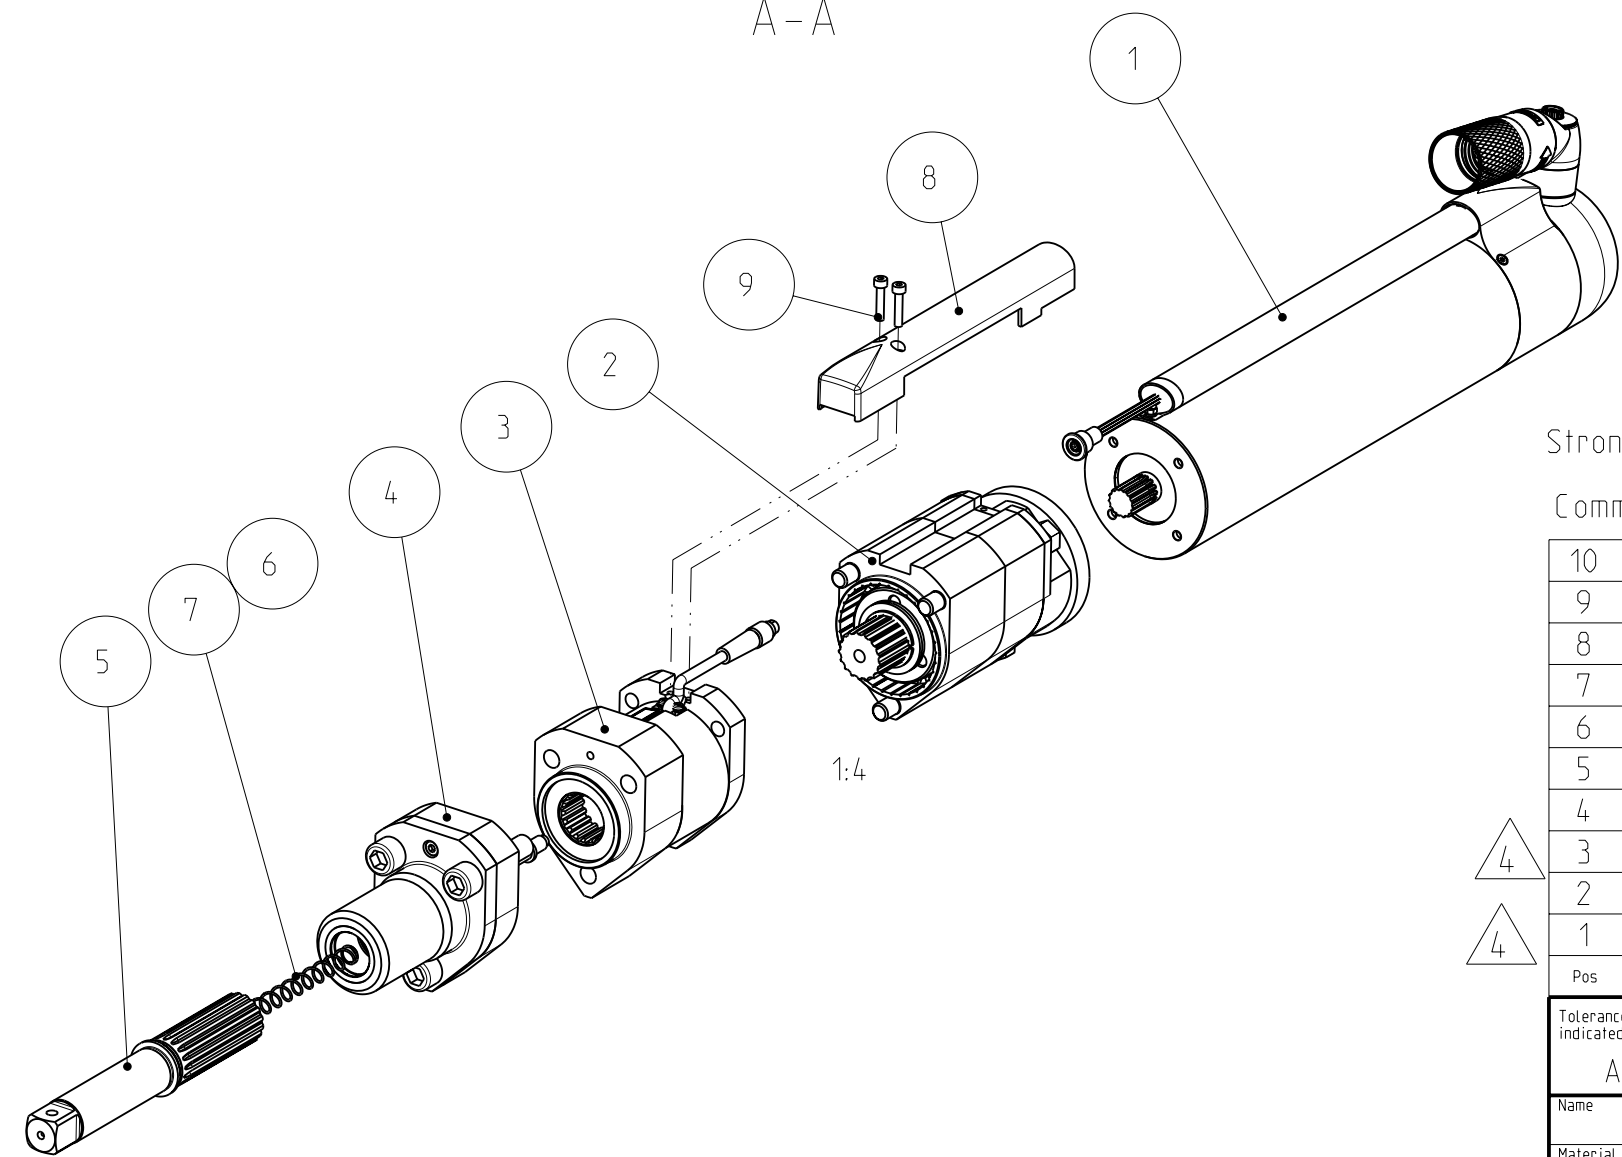
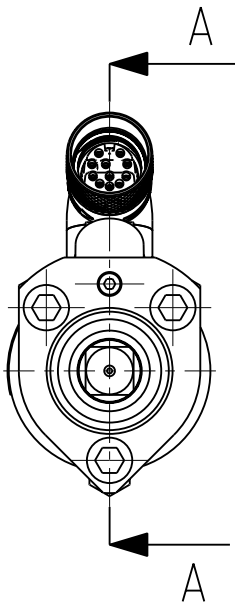


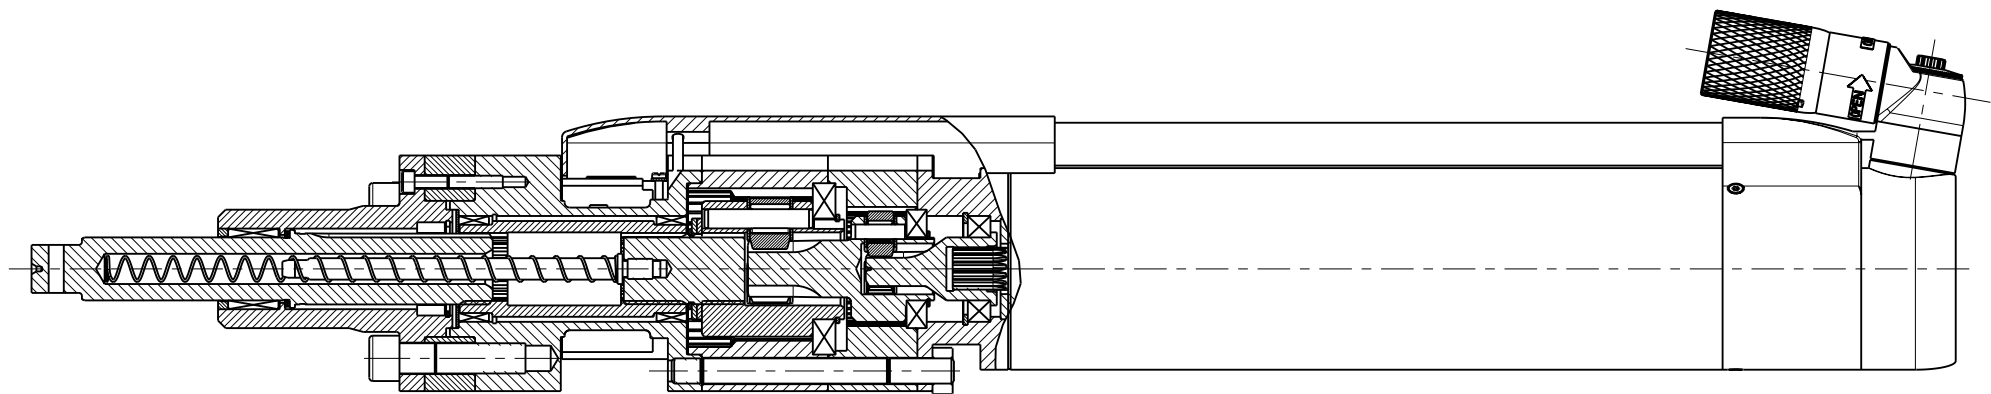

*FOR GREASE INSTRUCTION SEE PZ4113

Strongest compression spring mounted at delivery

Comment: Max torque 450Nm. Max speed 265 rpm.

10	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
9	0211 1174 00	2	HEX SOCK SCREW	MC6S M4x20 12.9
8	4230 2681 01	1	CABLE RAIL	QST 80
7	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N
6	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N
5	4230 1971 00	1	SOCKET HOLDER	QMX80 :3/4" :Tra. 50
4	4230 1929 80	1	FRONT PART	QMX80
3	4230 2965 80	1	TRANSDUCER SET	QDT72-500
2	4230 2682 80	1	GEAR UNIT	QST80 i=22.673 ((47/11)+1)*((33/10)+1)
1	4230 3014 80	1	MOTOR	QST80/90


Pos	Designation	Number	Name	Comment
	Tolerances, if not indicated, according to:	-	-	-
	AC-STD	-	-	-

Name QST80-450CT-T50-L146-H19				QST		Secrecy class	
Material -				1102 K/-		Drawing owner	
-				CAD Pro/E		T00	
Scale 1:3		Format A3		Family MK2_G		Compare -	
Drawn tooten		Blank -		Replaces -		Date	
Cons.class 1295 K/-		Rev 4		Status RELEASED		Designation	
Mass/Volume 17.6 kg		Date 2007-01-03		8435 6075 10		Sheet 1 (2)	

4	-	New connector: Motor & Transducer replaced = MK2	2013-03-05	JZr
Note	Pos.	Modified from	Date	Intr.

Model name	8435607510	Rev.Ver	4.1
Drawing name	8435607510	Rev.Ver	4.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

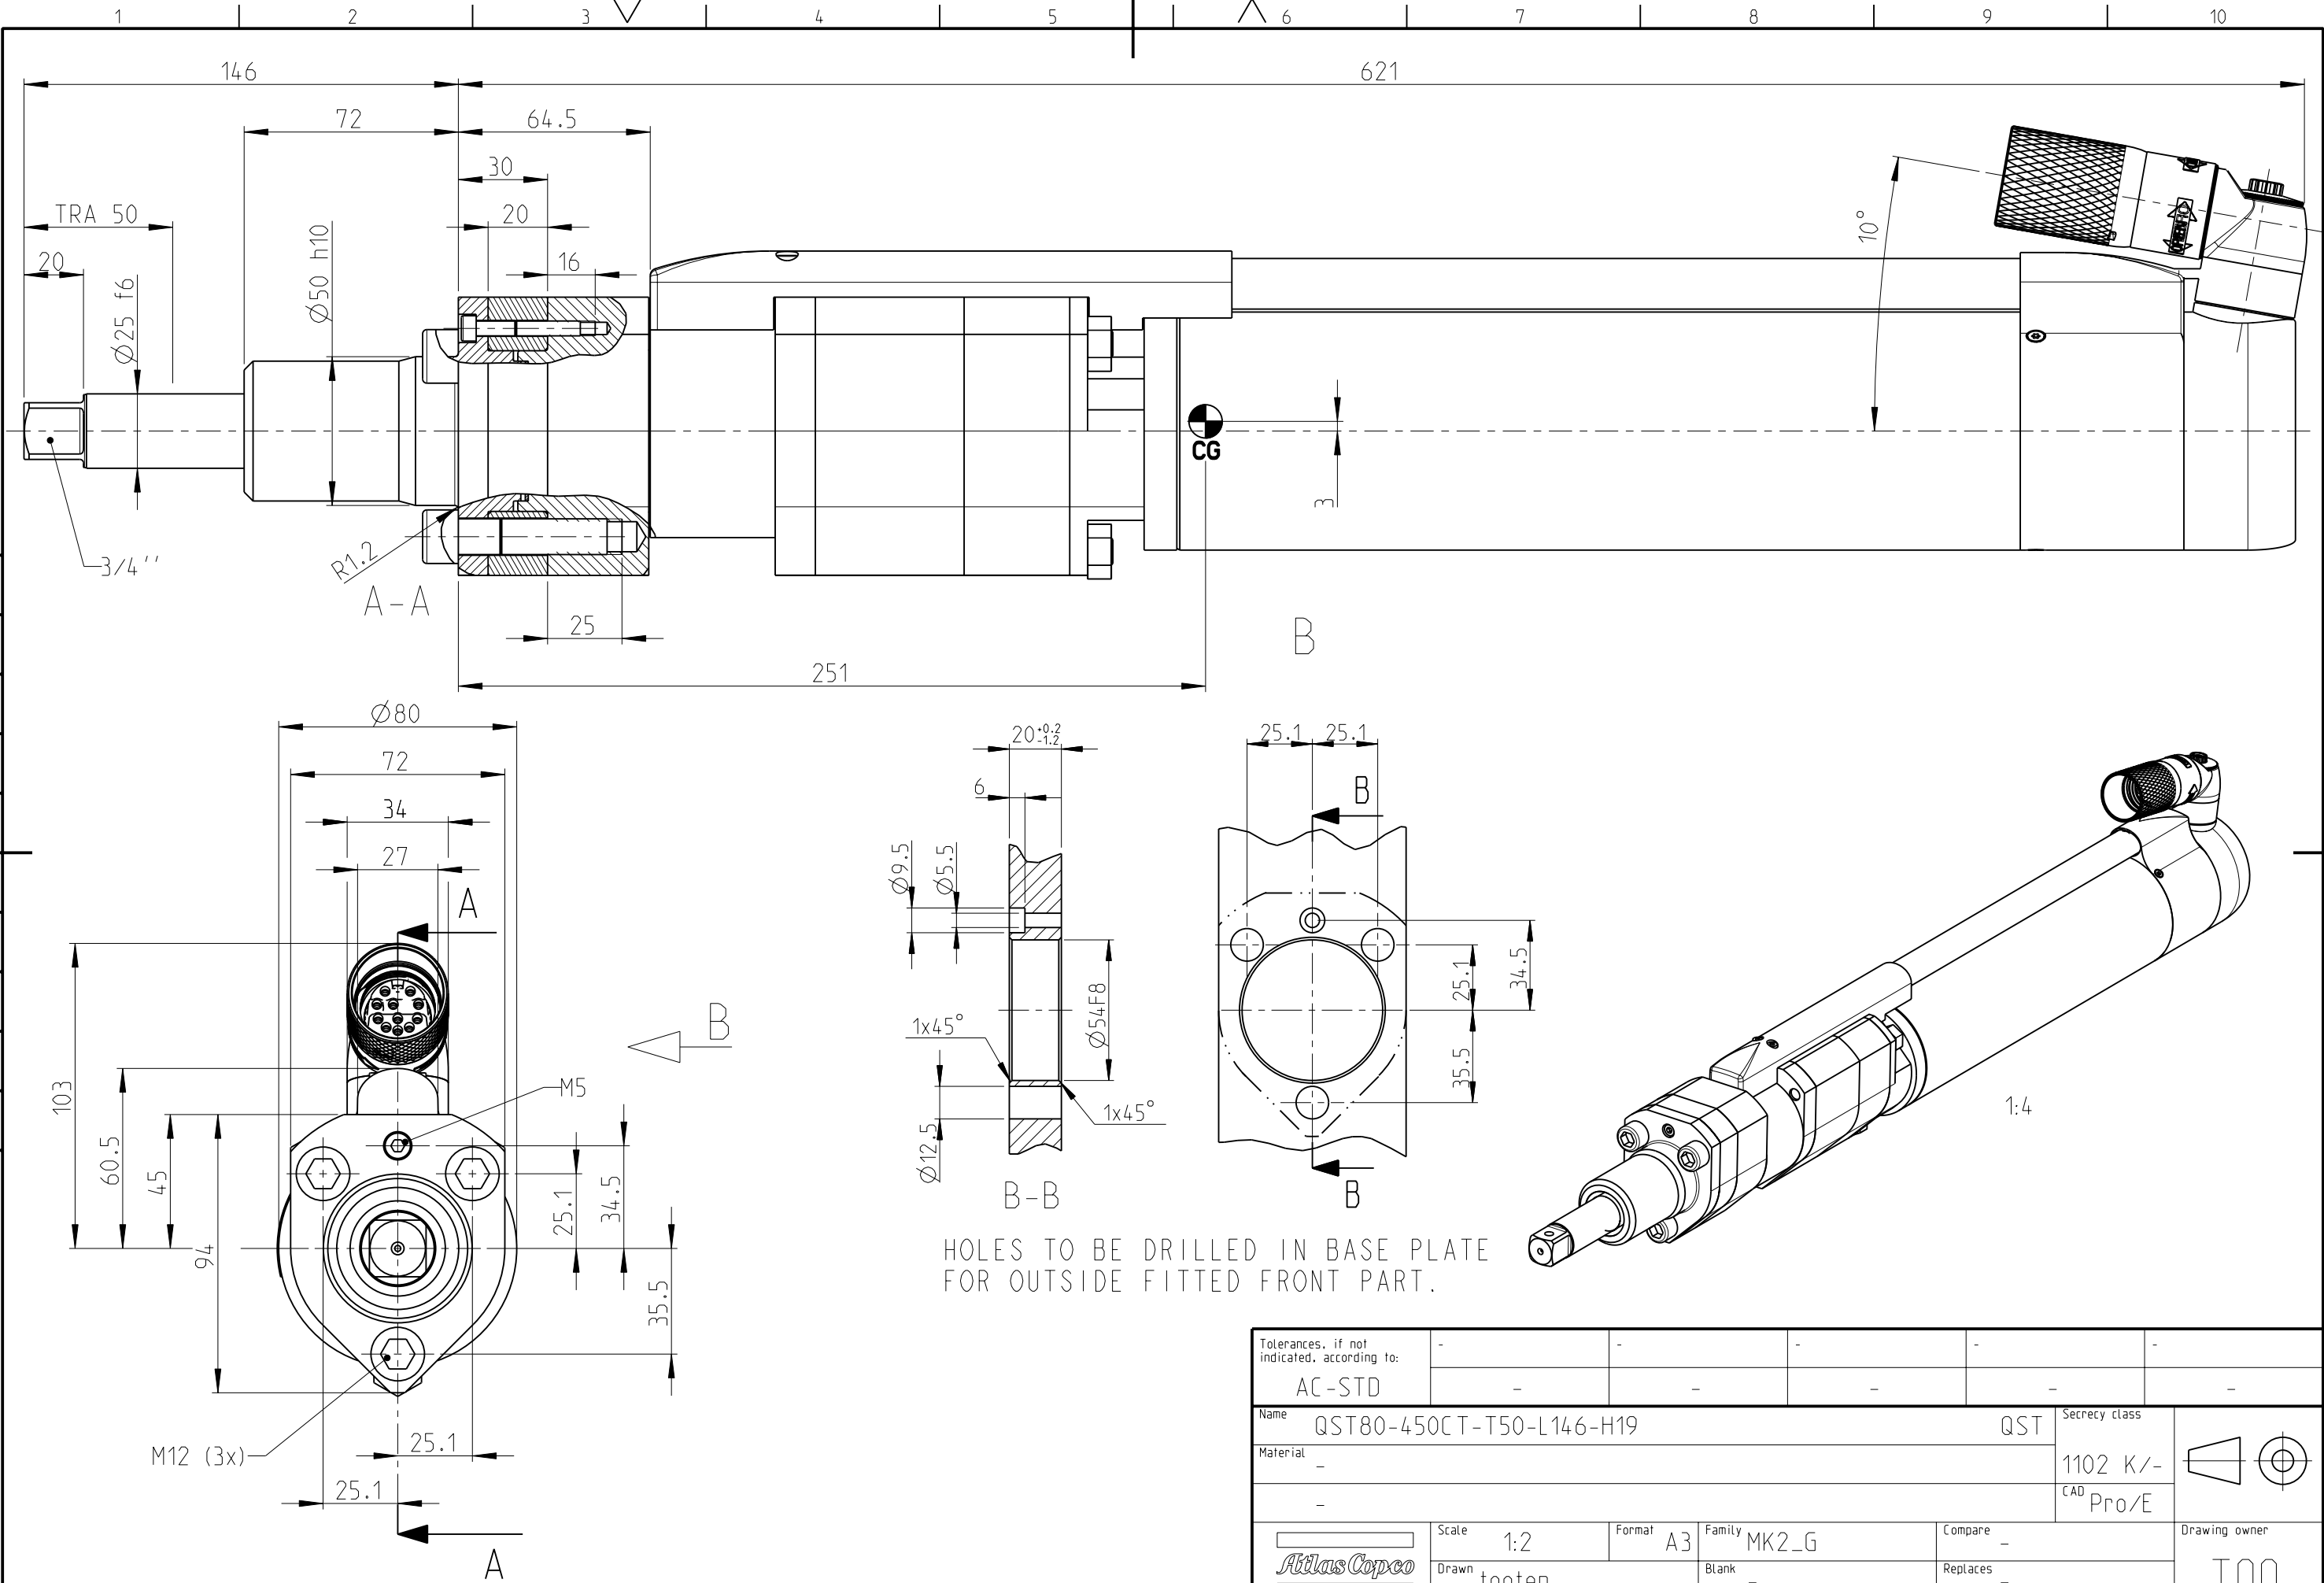

HOLES TO BE DRILLED IN BASE PLATE
FOR OUTSIDE FITTED FRONT PART.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST80-450CT-T50-L146-H19					QST	Secrecy class
Material -					1102 K/-	
-					CAD Pro/E	
	Scale	1:2	Format	A3	Family	MK2_G
	Drawn	tooten	Blank	-	Compare	-
	Cons.class	1295 K/-	Rev	4	Replaces	-
Transferred from		SW	Mass/Volume	17.6 kg	Status	RELEASED
					Date	2007-01-03
					Designation	8435 6075 10
					Sheet 2 (2)	
					Drawing owner	T00

4	-	New connector: Motor & Transducer replaced = MK2	2013-03-05	JZr
Note	Pos.	Modified from	Date	Intr.