


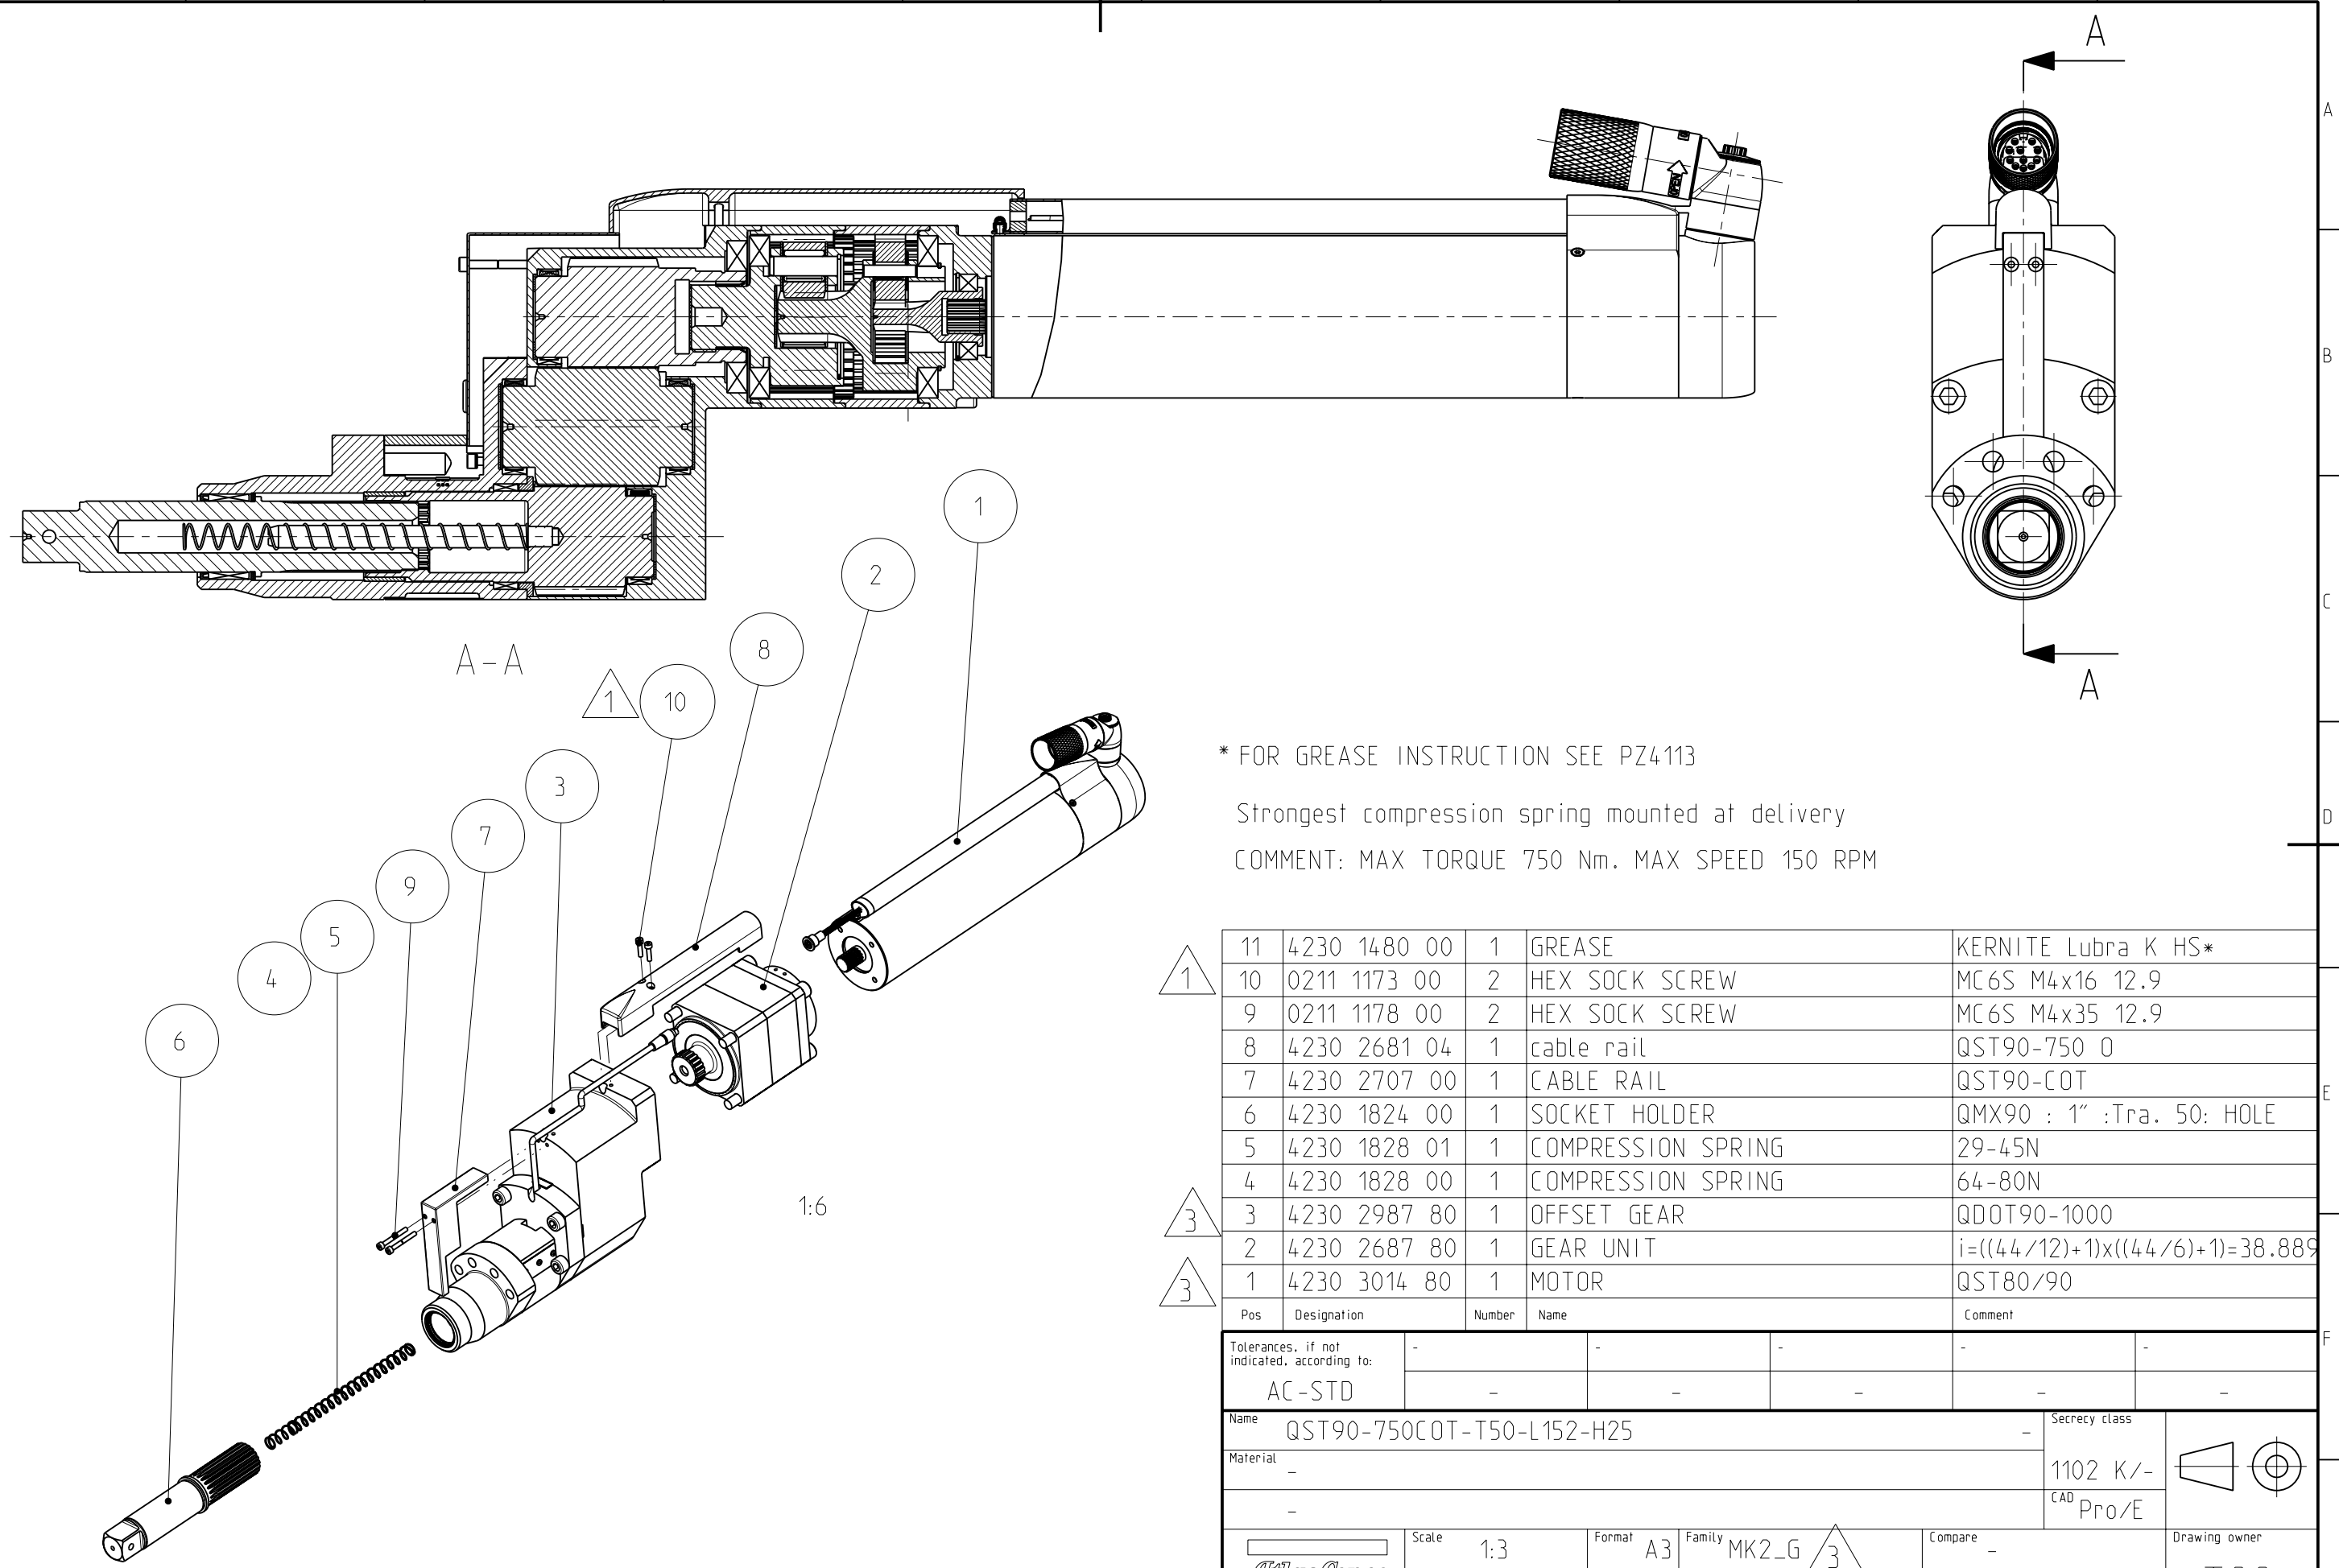

* FOR GREASE INSTRUCTION SEE PZ4113

Strongest compression spring mounted at delivery

COMMENT: MAX TORQUE 750 Nm. MAX SPEED 150 RPM

11	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
10	0211 1173 00	2	HEX SOCK SCREW	MC6S M4x16 12.9
9	0211 1178 00	2	HEX SOCK SCREW	MC6S M4x35 12.9
8	4230 2681 04	1	cable rail	QST90-750 0
7	4230 2707 00	1	CABLE RAIL	QST90-COT
6	4230 1824 00	1	SOCKET HOLDER	QMX90 : 1" :Tra. 50: HOLE
5	4230 1828 01	1	COMPRESSION SPRING	29-45N
4	4230 1828 00	1	COMPRESSION SPRING	64-80N
3	4230 2987 80	1	OFFSET GEAR	QDOT90-1000
2	4230 2687 80	1	GEAR UNIT	$i=((44/12)+1) \times ((44/6)+1)=38.889$
1	4230 3014 80	1	MOTOR	QST80/90
Pos	Designation	Number	Name	Comment

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-




Name	QST90-750COT-T50-L152-H25				Secrecy class
Material	-				1102 K/-
	-				CAD Pro/E
Scale	1:3	Format	A3	Family	MK2_G 3
Drawn	TOOTEN		Blank	-	Replaces
Cons.class	1295 K/-	Rev	3	Status	RELEASED
Transferred from	-	Mass/Volume	29.3 kg	Date	2007-05-09
				Designation	8435 6085 20
				Sheet 1 (2)	

3	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	ASH
Note	Pos.	Modified from	Date	Intr.

Model name	8435608520	Rev.Ver	3.0+
Drawing name	8435608520	Rev.Ver	3.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

3	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	ASH
Note	Pos.	Modified from	Date	Intr.

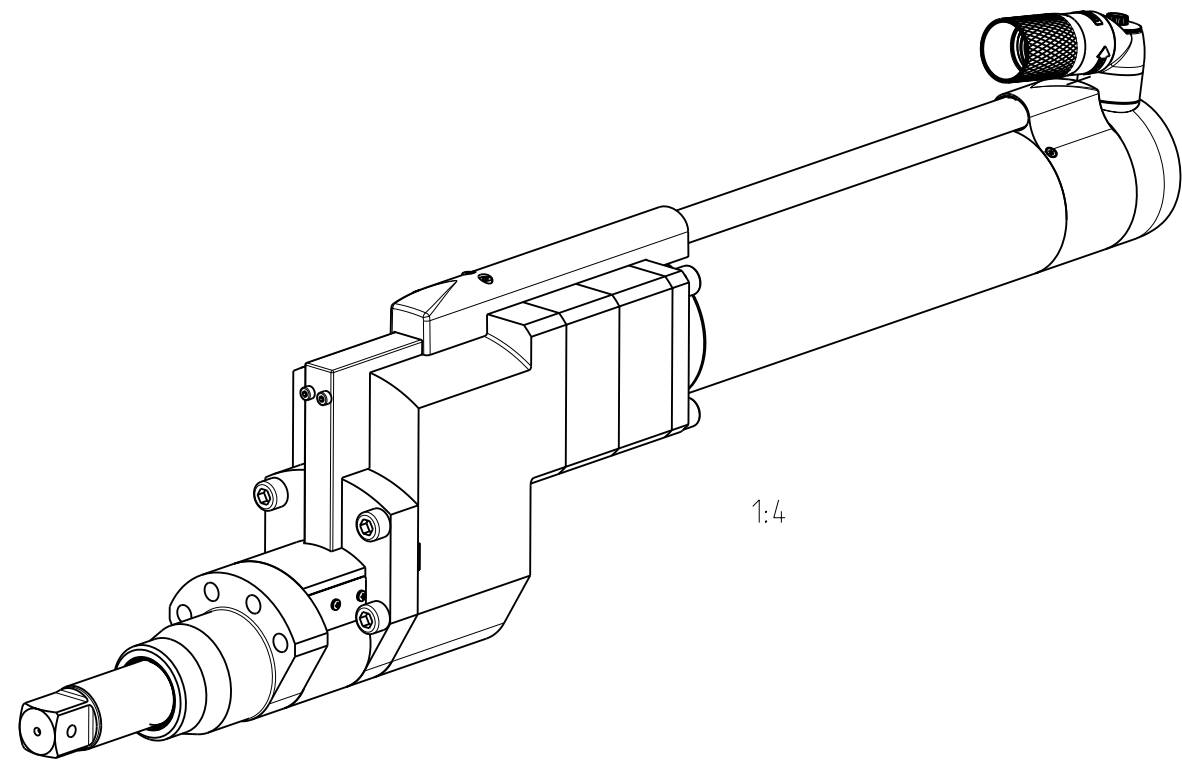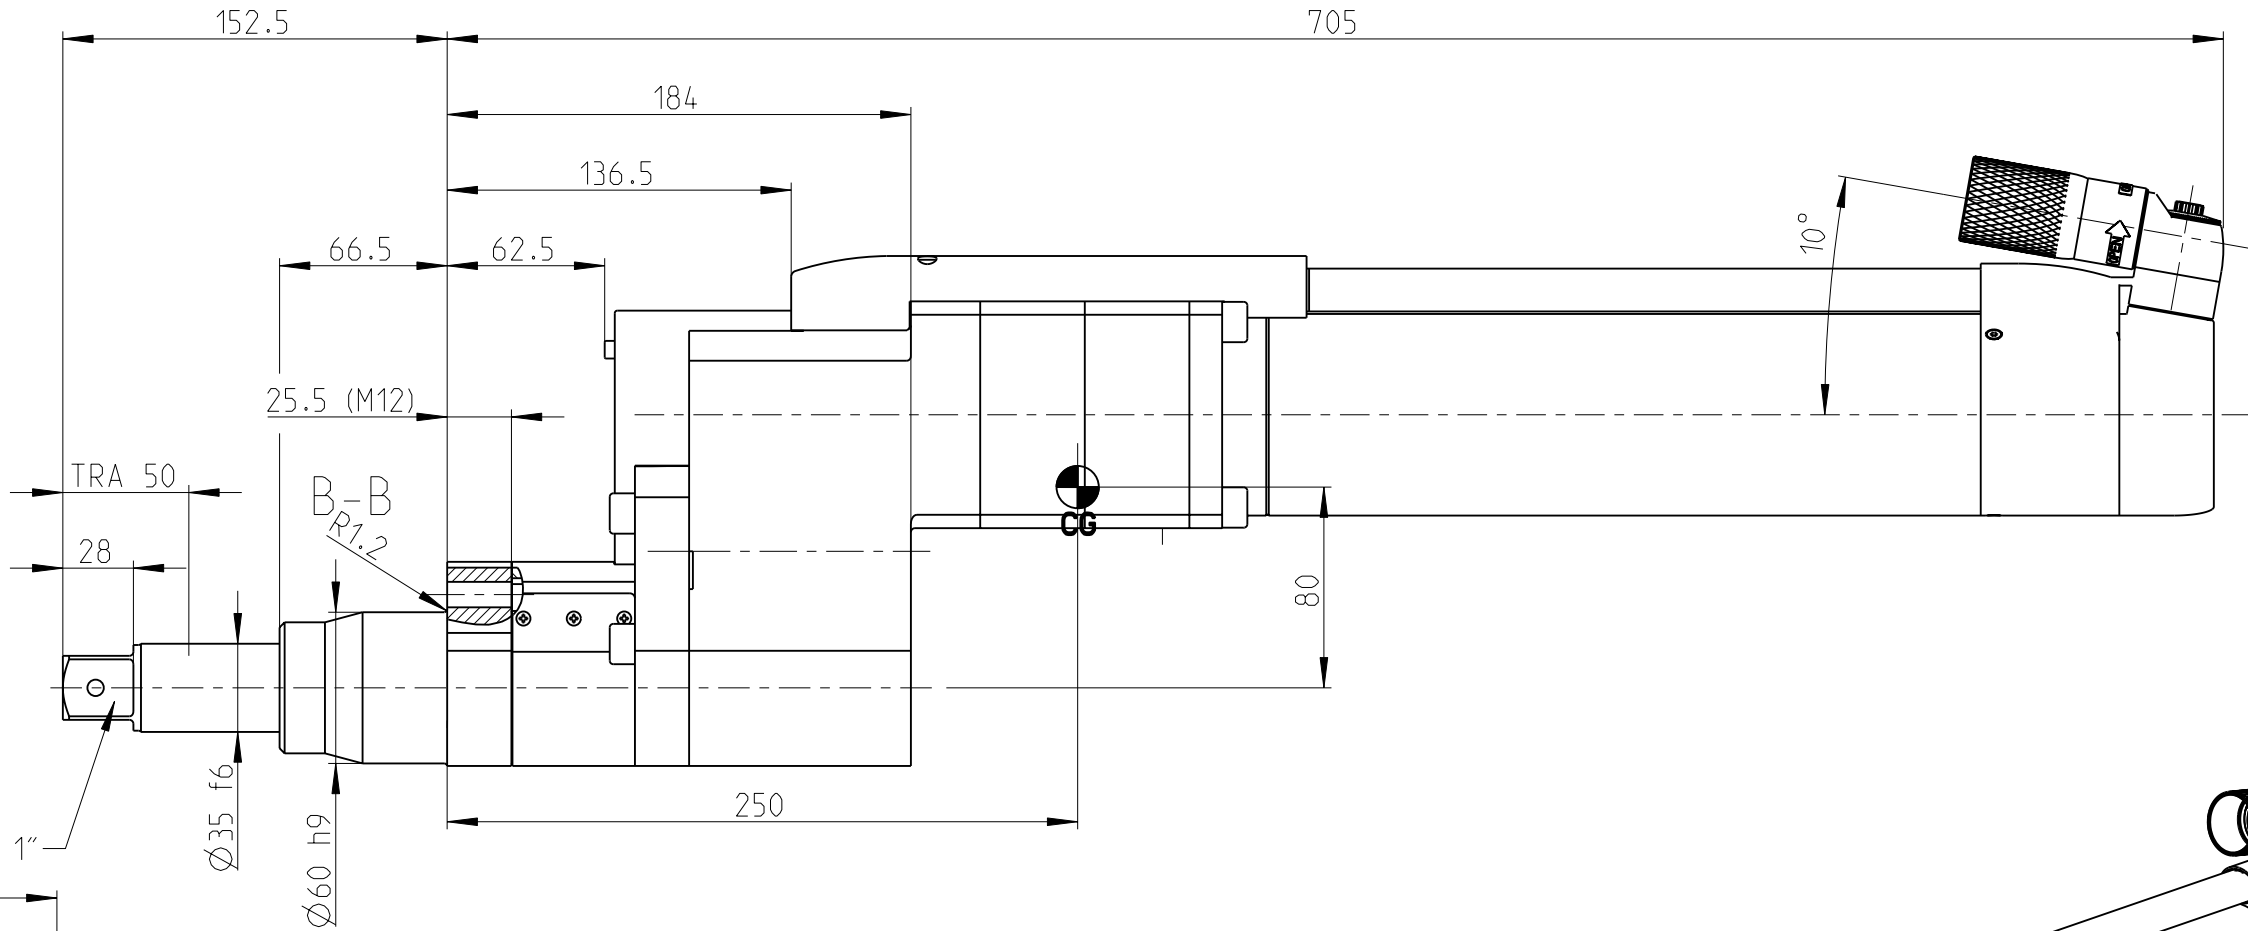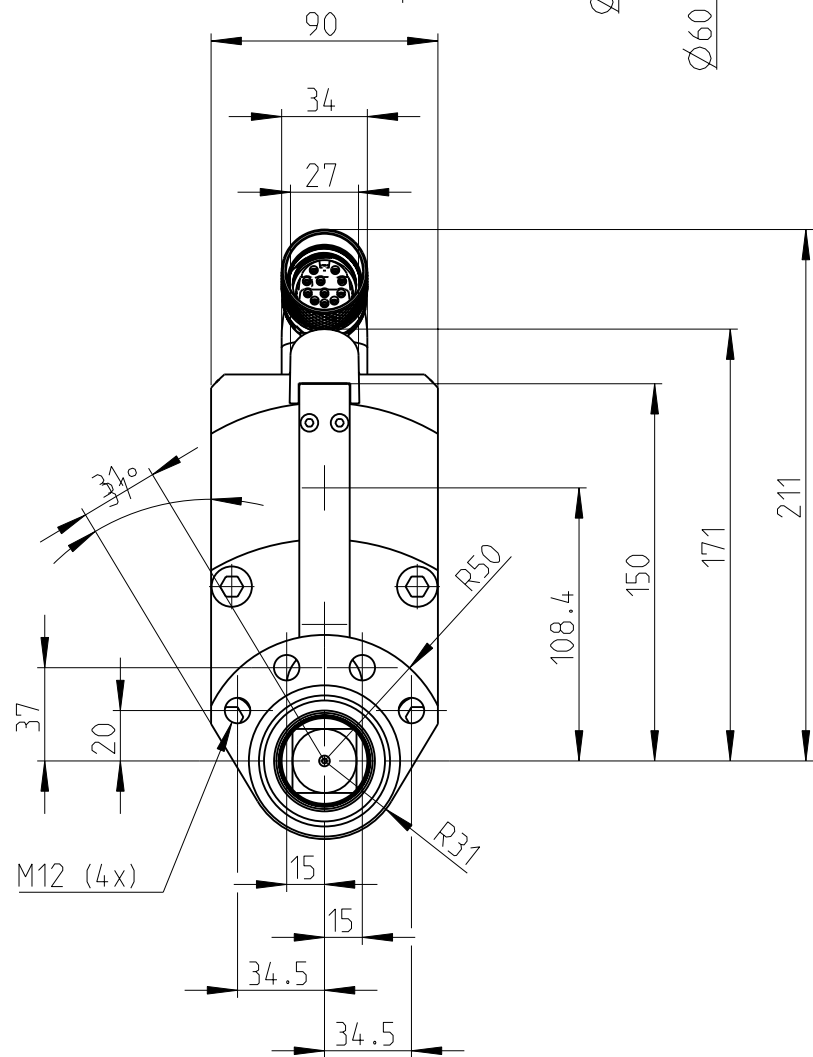

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST90-750COT-T50-L152-H25					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
		Scale 1:3	Format A3	Family MK2_G	Compare -	
Drawn TOOTEN		Blank -		Replaces		Drawing owner
Transferred from -		Cons.class 1295 K/-	Rev 3	Status RELEASED	Designation	T00
Mass/Volume 29.3 kg		Date 2007-05-09	8435 6085 20			