
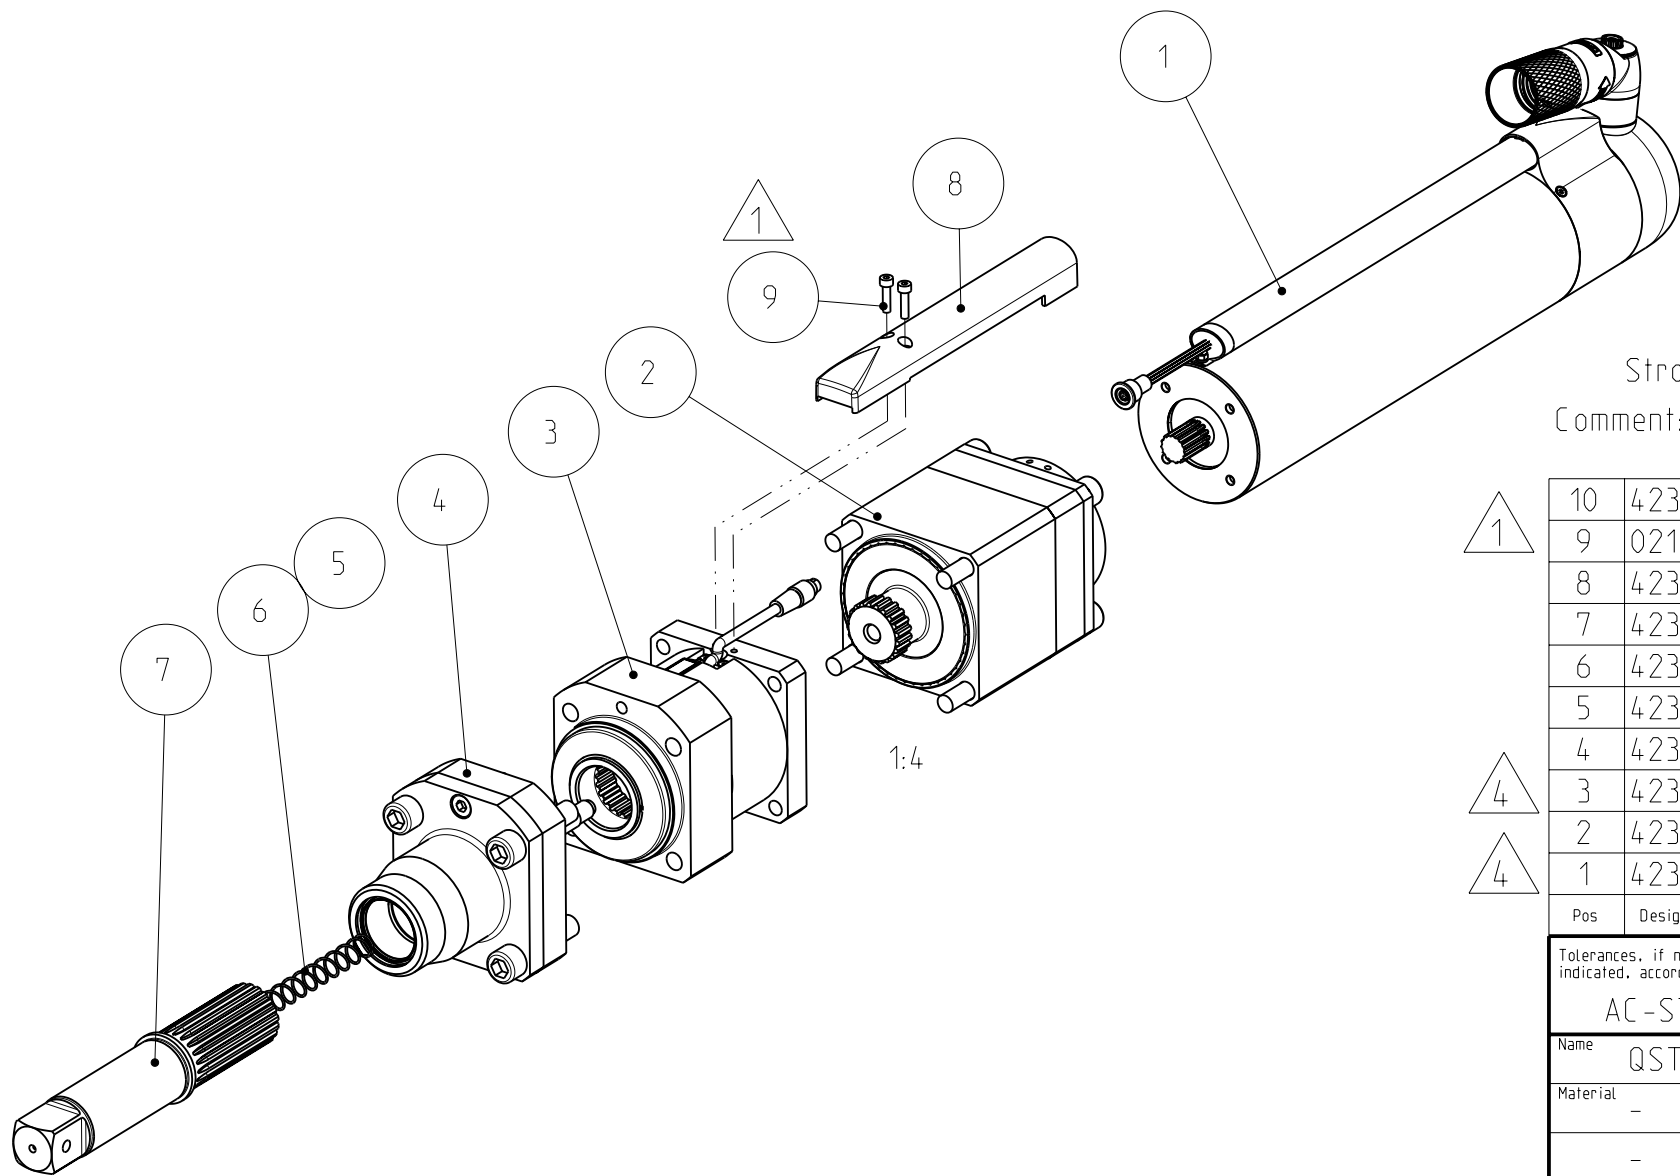


A-A

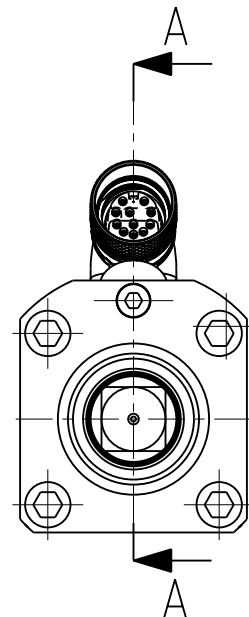

*FOR GREASE INSTRUCTION SEE PZ4113

Strongest compression spring mounted at delivery
Comment: Max torque 1000 Nm. Max speed 130 rpm.

10	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
9	0211 1173 00	2	HEX SOCK SCREW	MC6S M4x16 12.9
8	4230 2681 02	1	CABLE RAIL	QST 90-1000
7	4230 1824 00	1	SOCKET HOLDER	QMX90 : 1" :Tra. 50: HOLE
6	4230 1828 01	1	COMPRESSION SPRING	29-45N
5	4230 1828 00	1	COMPRESSION SPRING	64-80N
4	4230 1928 80	1	FRONT PART	QMX90
3	4230 2966 80	1	TRANSDUCER SET	QDT90-1000
2	4230 1917 80	1	GEAR UNIT	QMX90: l=46.84 = (47/22)+1)(44/20+1)(44/12+1)
1	4230 3014 80	1	MOTOR	QST80/90
Pos	Designation	Number	Name	Comment

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST90-1000CT-T50-L152-H25				QST		Secrecy class
Material -				1102 K/-		
-				CAD Pro/E		
		Scale 1:3	Format A3	Family MK2_G	Compare -	Drawing owner TOO
Drawn tooten		Blank -		Replaces -		
Transferred from -		Cons.class 1295 K/-	Rev 4	Status RELEASED	Designation	
		Mass/Volume 22.4 kg	Date 2007-01-04	8435 6090 10		

4	-	New connector: Motor & Transducer replaced = MK2	2013-03-04	CSR
Note	Pos.	Modified from	Date	Intr.

8435609010

4	-	New connector: Motor & Transducer replaced = MK2	2013-03-04	CSR
Note	Pos.	Modified from	Date	Intr.



<i>Atlas Copco</i>	Scale 9:20	Format A3	Family MK2_G	Compare _	Drawing owner TOO
	Drawn tooten		Blank _	Replaces _	
Transferred from _	Cons.class 1295 K/-	Rev 4	Status RELEASED	Designation	Sheet 2 (2)
	Mass/Volume 22.4 kg	Date 2007-01-04	8435 6090 10		