

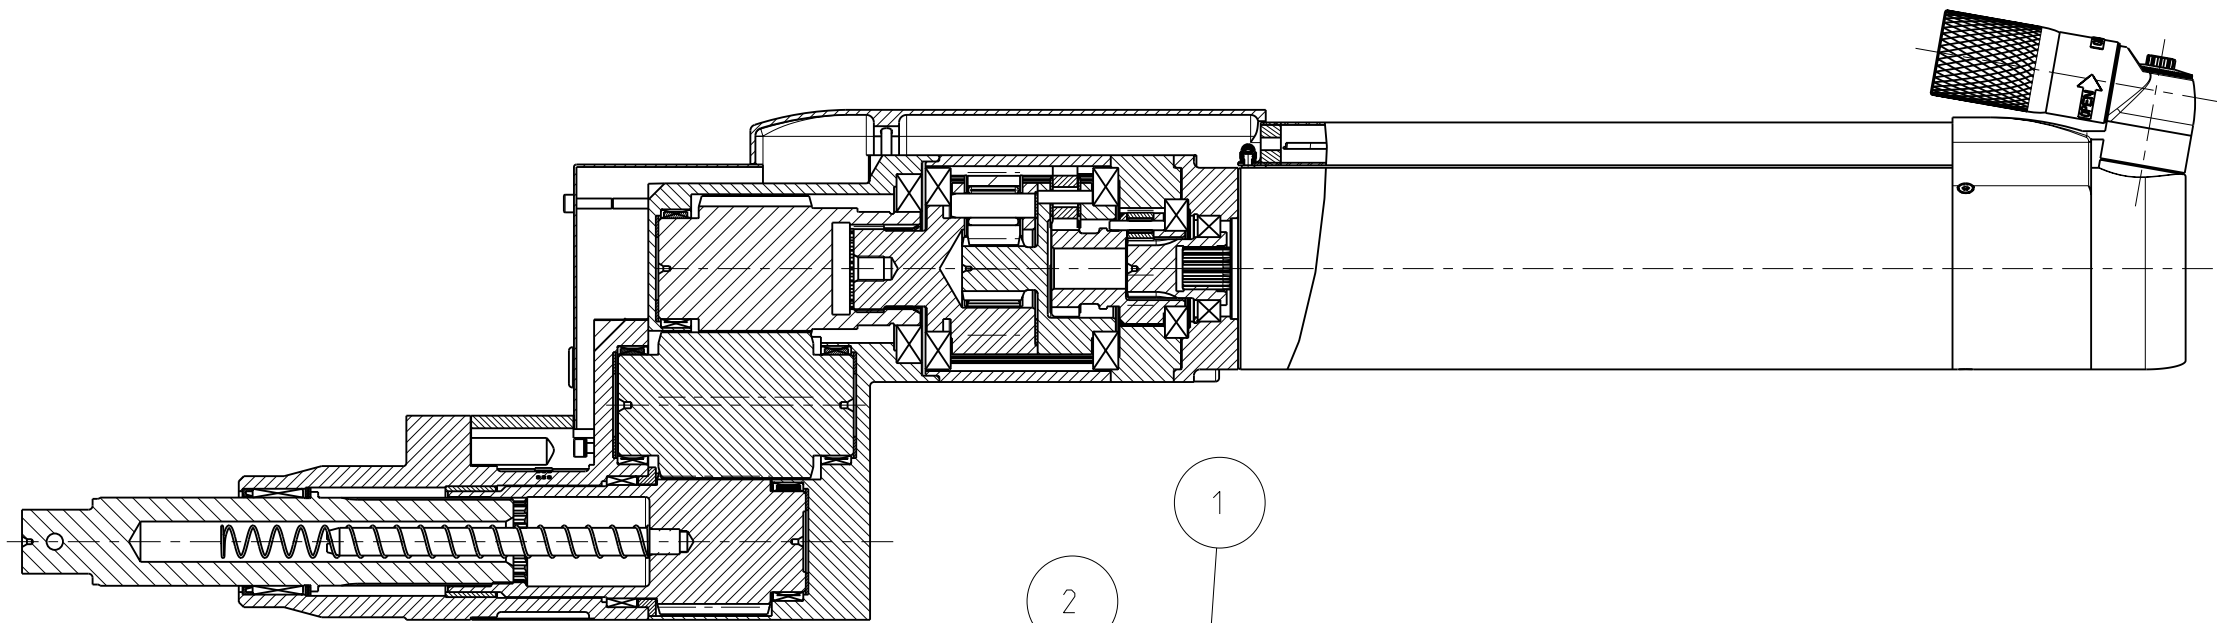


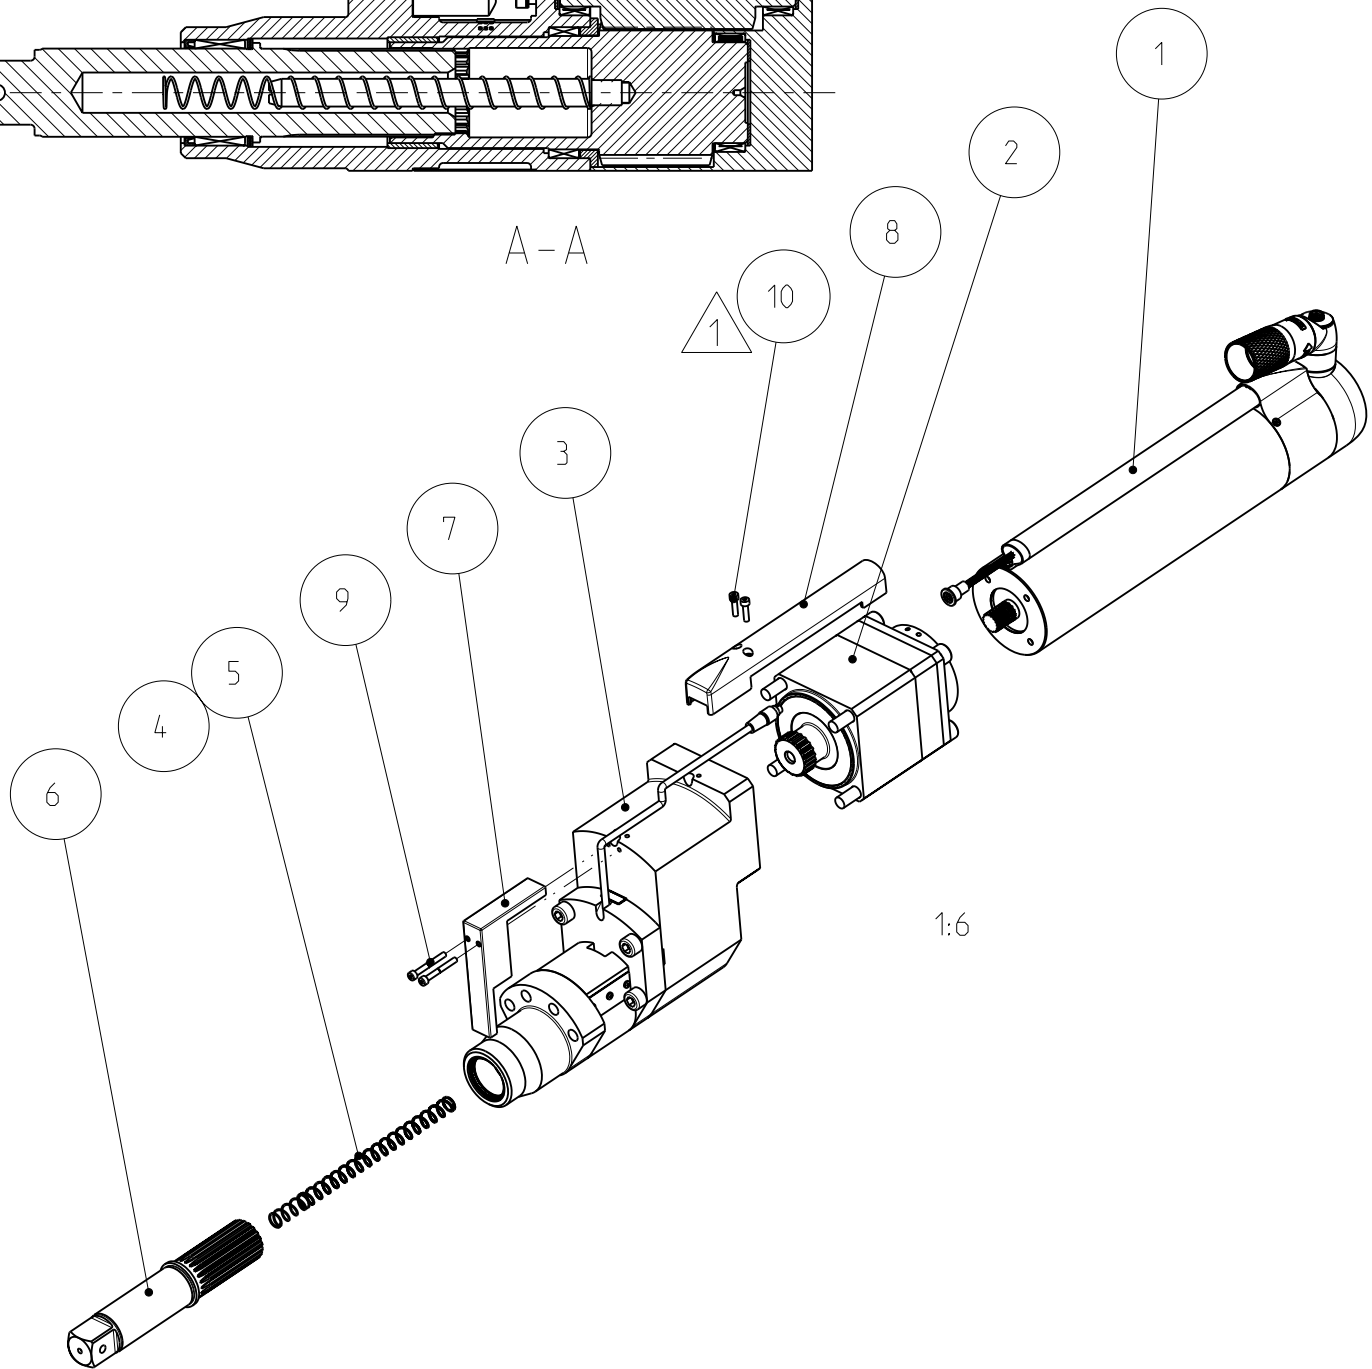

A-A

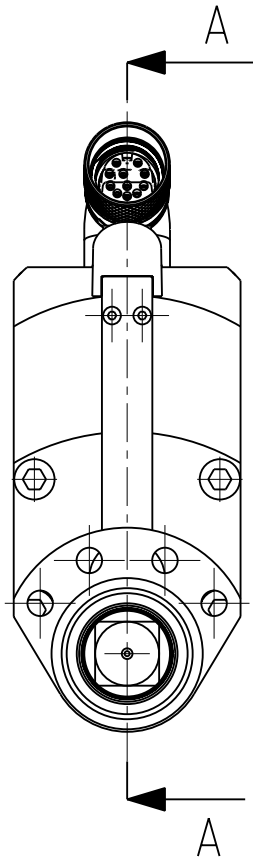

1:6

* FOR GREASE INSTRUCTION SEE PZ4113
Strongest compression spring mounted at delivery
COMMENT: MAX TORQUE 1000 Nm. MAX SPEED 130 RPM




11	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
10	0211 1173 00	2	HEX SOCK SCREW	MC6S M4x16 12.9
9	0211 1178 00	2	HEX SOCK SCREW	MC6S M4x35 12.9
8	4230 2681 06	1	CABLE RAIL	QST90-1000 0
7	4230 2707 00	1	CABLE RAIL	QST90-COT
6	4230 1824 00	1	SOCKET HOLDER	QMX90 : 1" :Tra. 50: HOLE
5	4230 1828 01	1	COMPRESSION SPRING	29-45N
4	4230 1828 00	1	COMPRESSION SPRING	64-80N
3	4230 2987 80	1	OFFSET GEAR	QDOT90-1000
2	4230 1917 80	1	GEAR UNIT	QMX90: $l=46.84 = (47/22)+1(44/20+1)(44/12+1)$
1	4230 3014 80	1	MOTOR	QST80/90

Pos	Designation	Number	Name	Comment
Tolerances, if not indicated, according to:				
AC-STD		-	-	-
Name QST90-1000COT-T50-L152-H25				
Material -				Secrecy class
-				1102 K/-
-				CAD Pro/E
Scale 1:3		Format A3	Family MK2_G	Compare -
Drawn ASH		Blank -	Replaces	
Cons.class 1295 K/-		Rev 6	Status RELEASED	Designation
Mass/Volume 30.2 kg		Date 2007-06-11	8435 6090 20	

6	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-08	ASH
Note	Pos.	Modified from	Date	Intr.

Model name	8435609020	Rev.Ver	6.1
Drawing name	8435609020	Rev.Ver	6.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

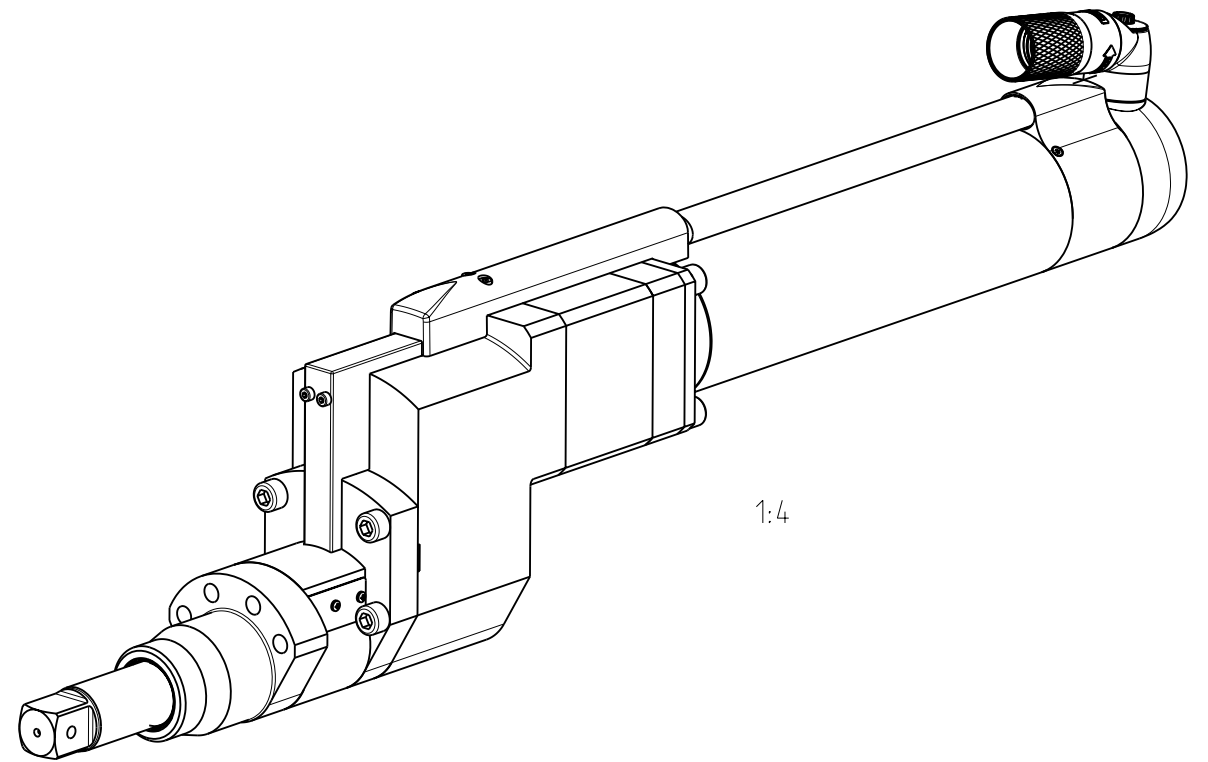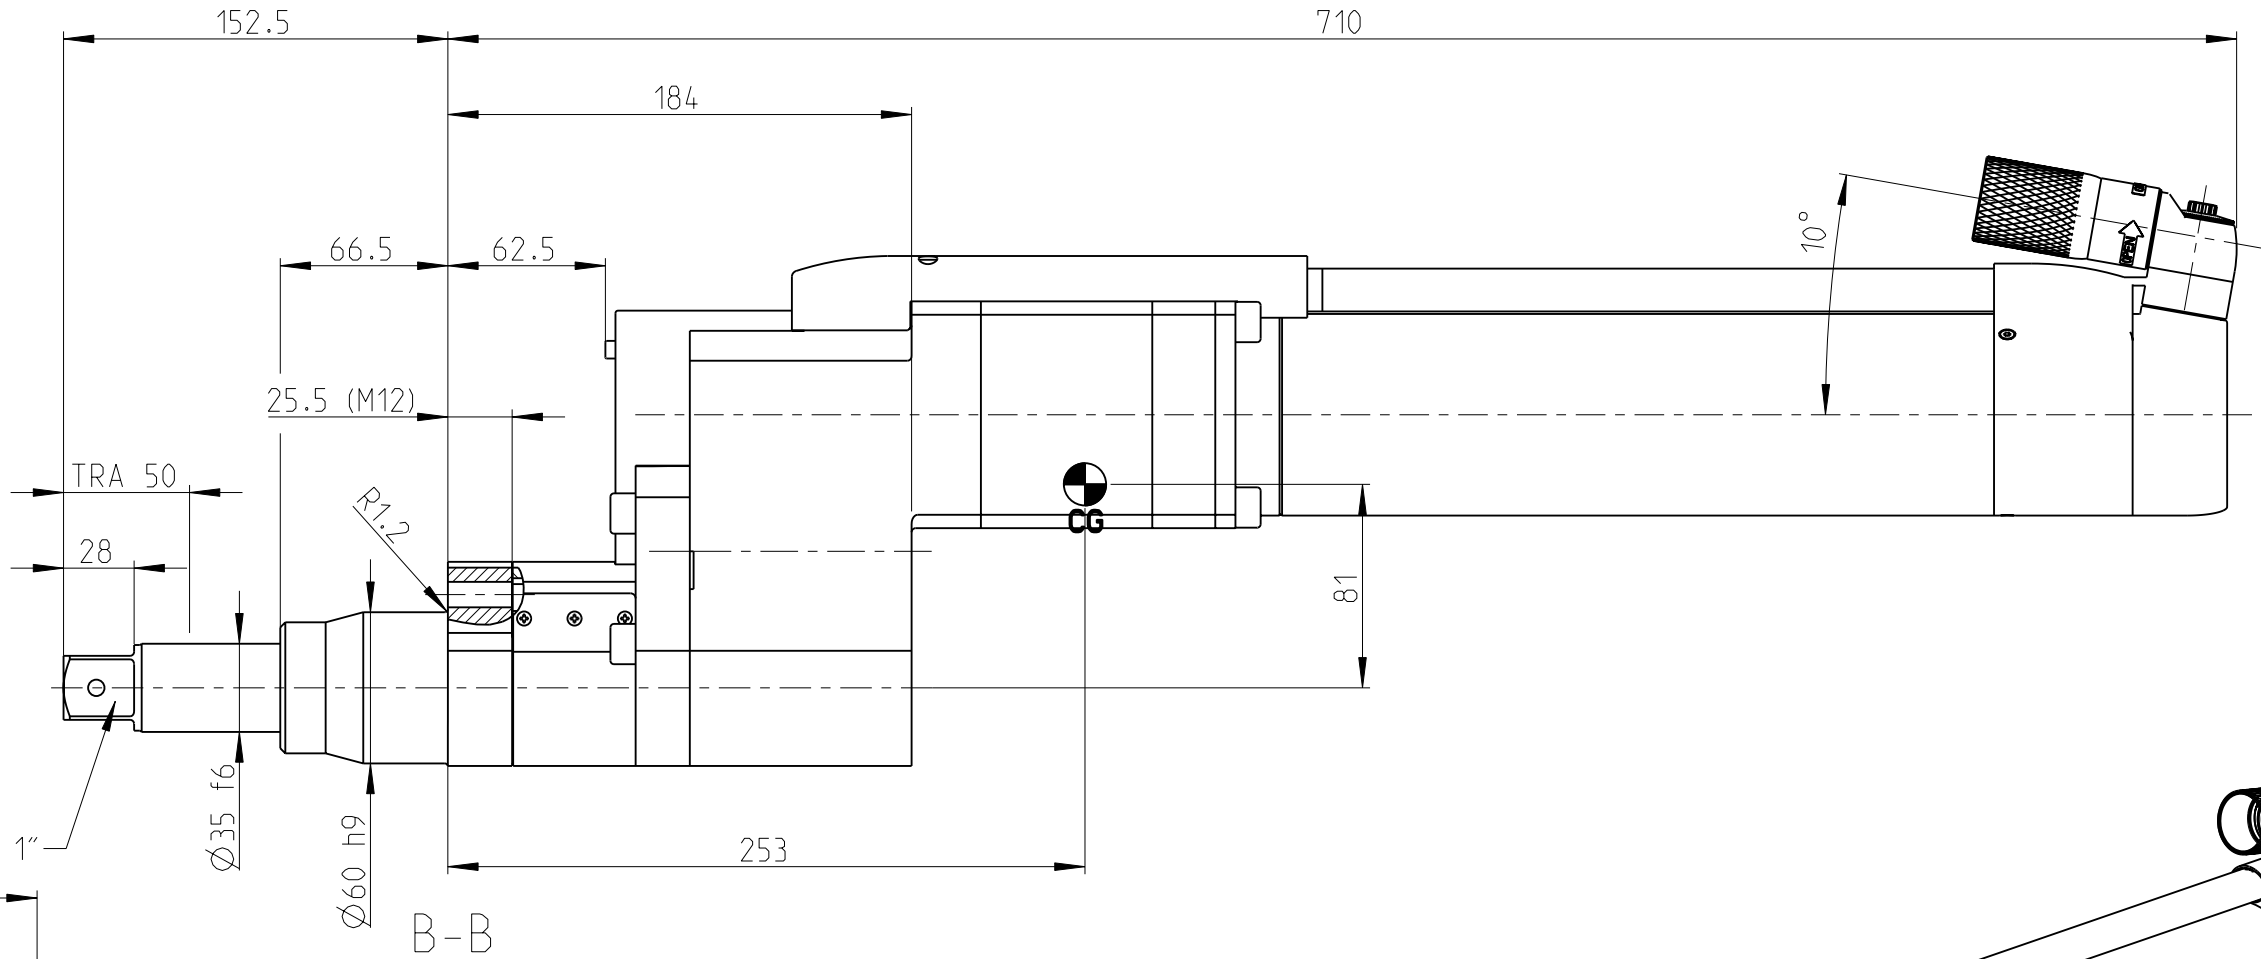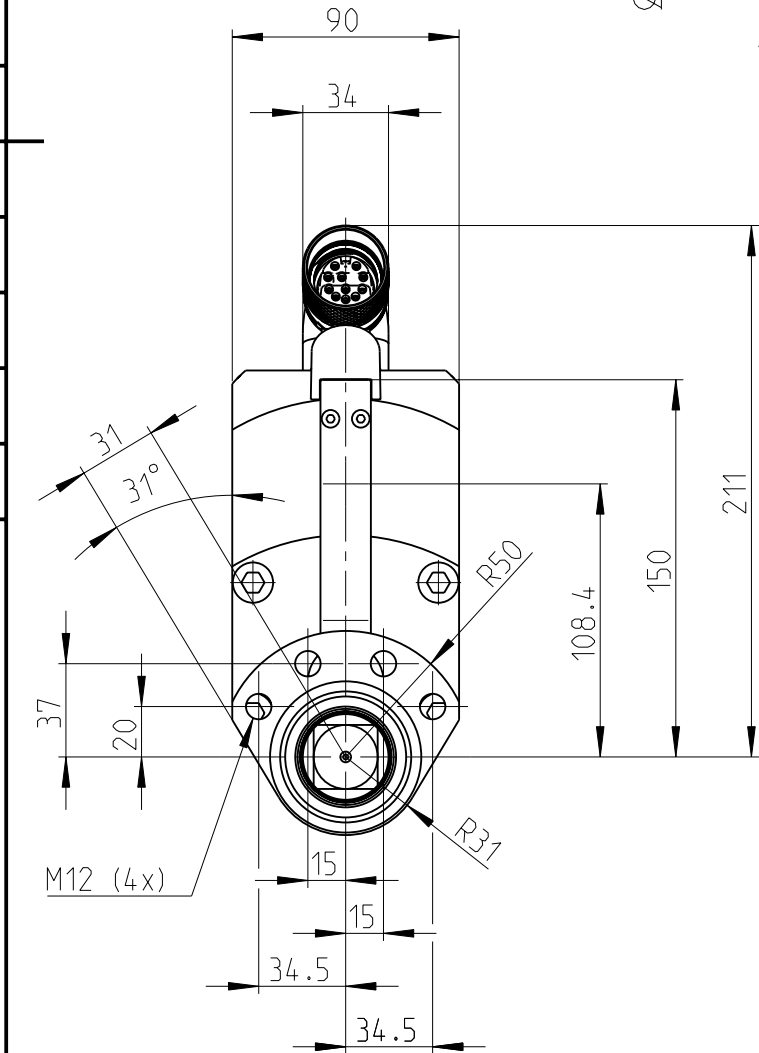

6	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-08	ASH
Note	Pos.	Modified from	Date	Intr.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST90-1000COT-T50-L152-H25					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
Atlas Copco		Scale 1:3	Format A3	Family MK2_G	Compare -	Drawing owner
		Drawn ASH		Blank -	Replaces	TOO
Transferred from -		Cons.class 1295 K/-	Rev 6	Status RELEASED	Designation	Sheet 2 (2)
		Mass/Volume 30.2 kg		Date 2007-06-11	8435 6090 20	