
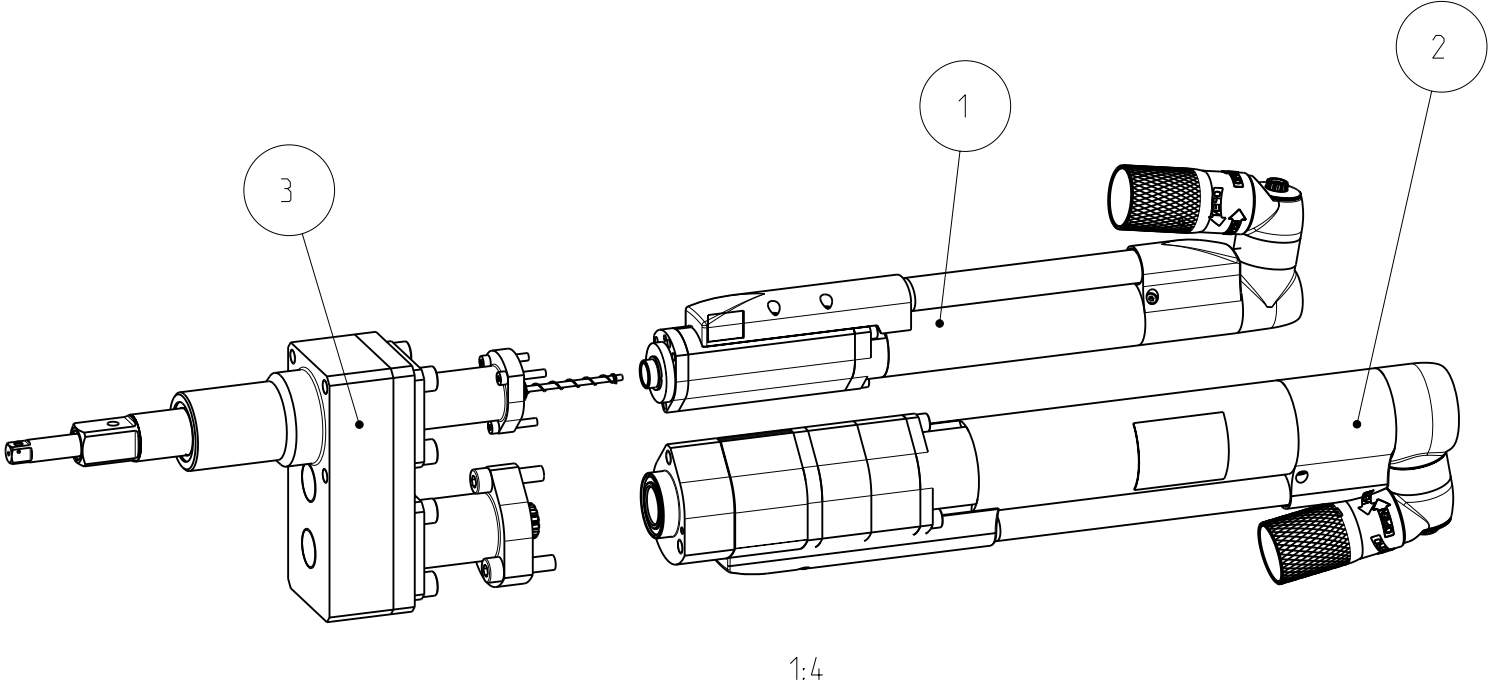


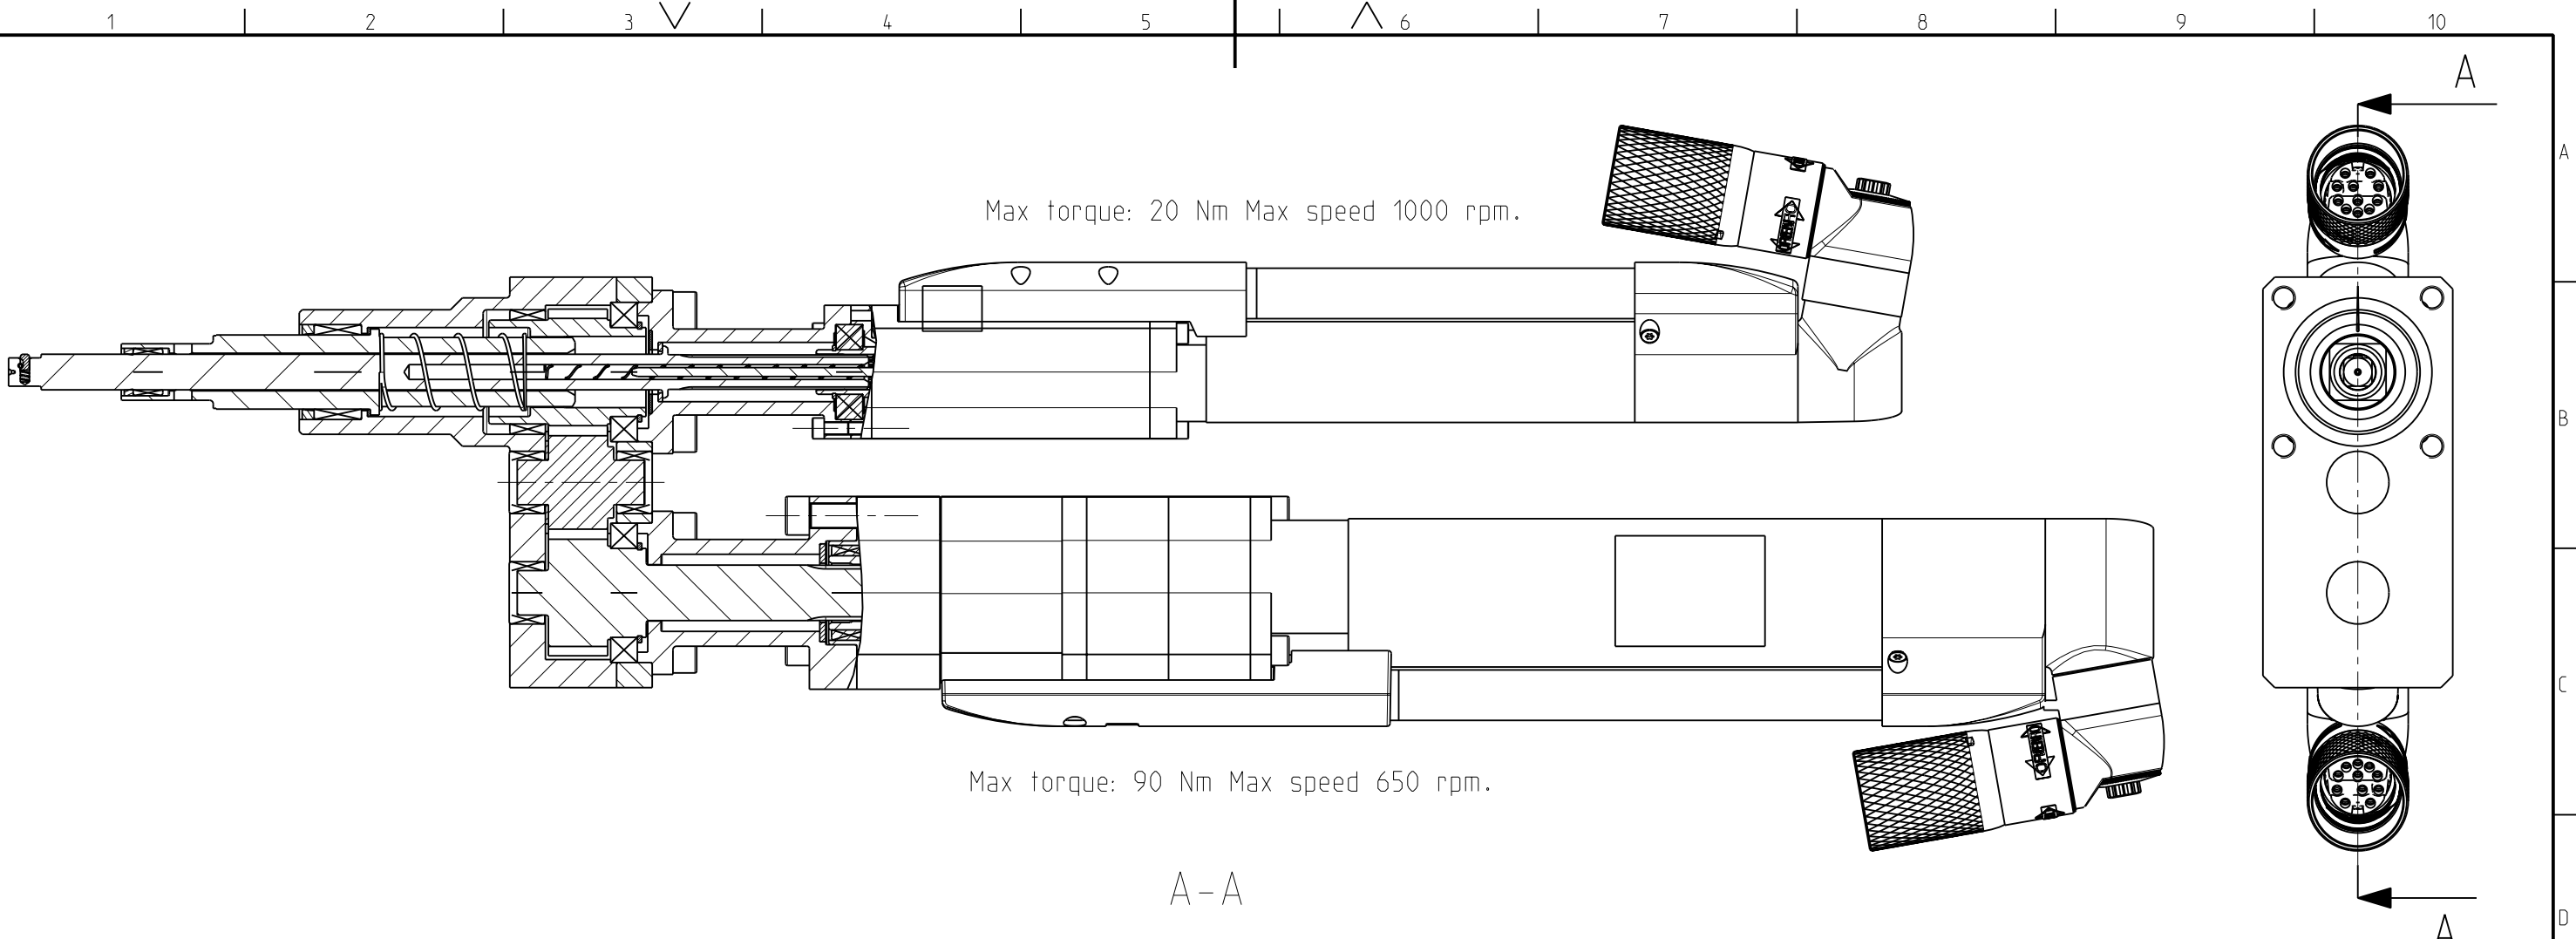

For grease instruction see PZ4113

SP=Specially design part, not available as standard spare part.




3	4232 4415 80	1	FRONT PART	i=1	SP
2	4230 2894 80	1	QST50-90CT	Max torque 90 Nm. Max speed 650 rpm.	
1	4230 2891 80	1	QST34-20CT	Max torque 20Nm. Max speed 1000rpm.	
Pos	Designation	Number	Name	Comment	Class
Tolerances, if not indicated, according to:		-	-	-	-
AC-STD		-	-	-	-
Name QST34-20CT-T50/QST50-90CTO-T25-L131-H20					Secrecy class
Material -					1102 K/-
-					CAD Pro/E
Scale 9:20		Format A3	Family -	Compare -	Drawing owner
Drawn HOn		Blank -	Replaces -		
Cons.class 1295 K/-		Rev 0	Status RELEASED	Designation	Sheet 1 (2)
Transferred from -		Mass/Volume 11.7 kg	Date 2013-06-24	9831 4041 82	

0	-	-	-	-
Note	Pos.	Modified from	Date	Intr.

Model name	9831404182	Rev.Ver	0.2
Drawing name	9831404182	Rev.Ver	0.2

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

0	-	-	-	-
Note	Pos.	Modified from	Date	Intr.

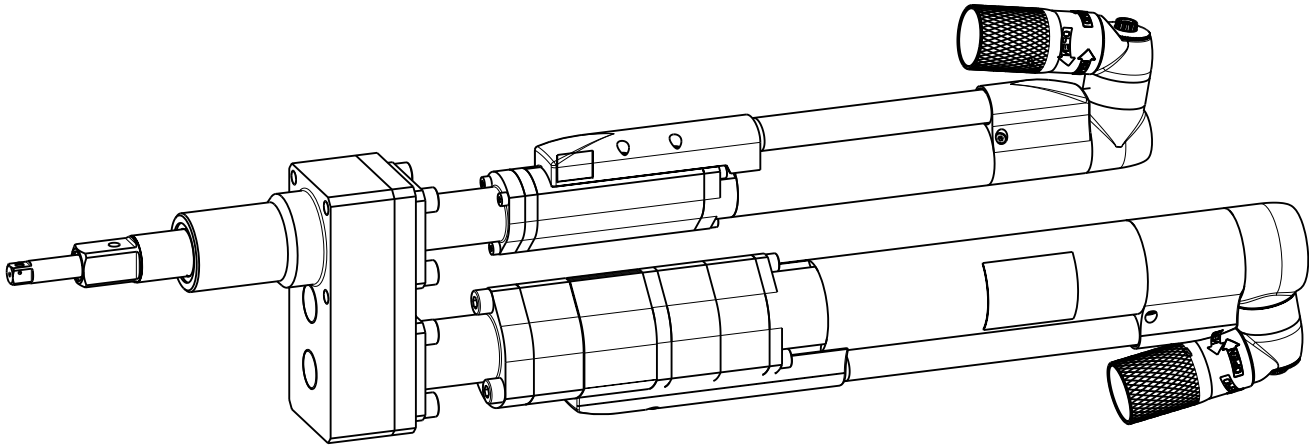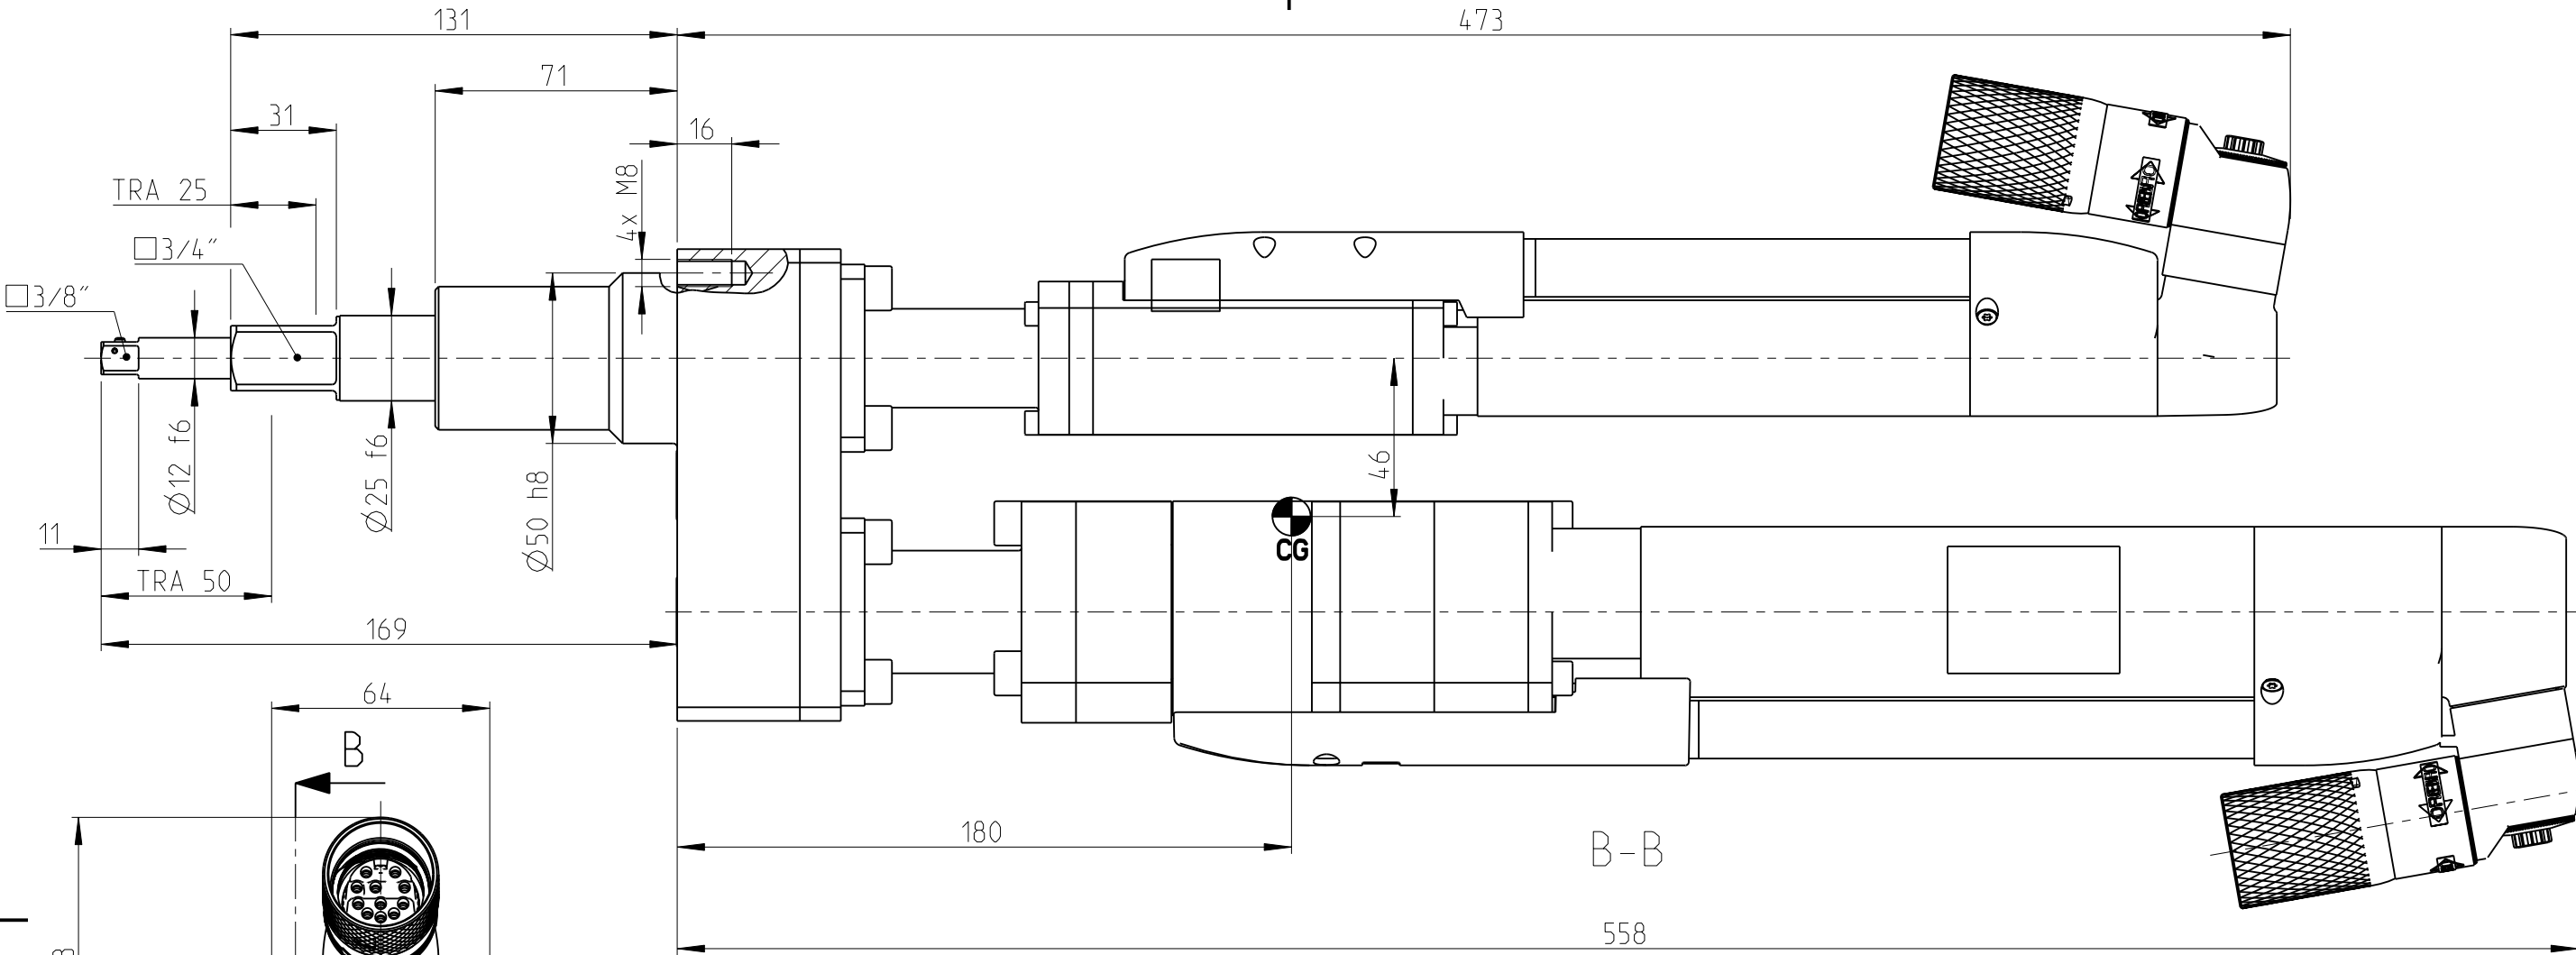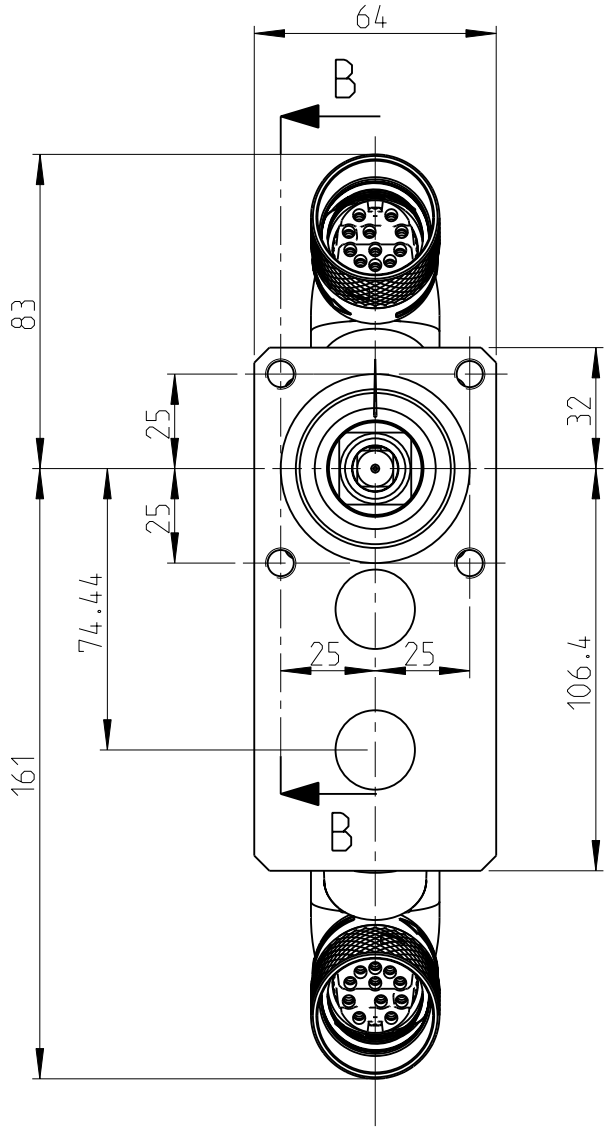

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST34-20CT-T50/QST50-90CTO-T25-L131-H20					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
					Drawing owner	
					T00	
					Transferred from	
					Scale 1:2	
					Format A3	
					Family -	
					Blank -	
					Cons.class 1295 K/-	
					Rev 0	
					Status RELEASED	
					Designation	
					Date 2013-06-24	
					Mass/Volume 11.7 kg	
					9831 4041 82	

A
B
C
D
E
F
G