
Model name	9831404229	Rev.Ver	0.1
Drawing name	9831404229	Rev.Ver	0.1

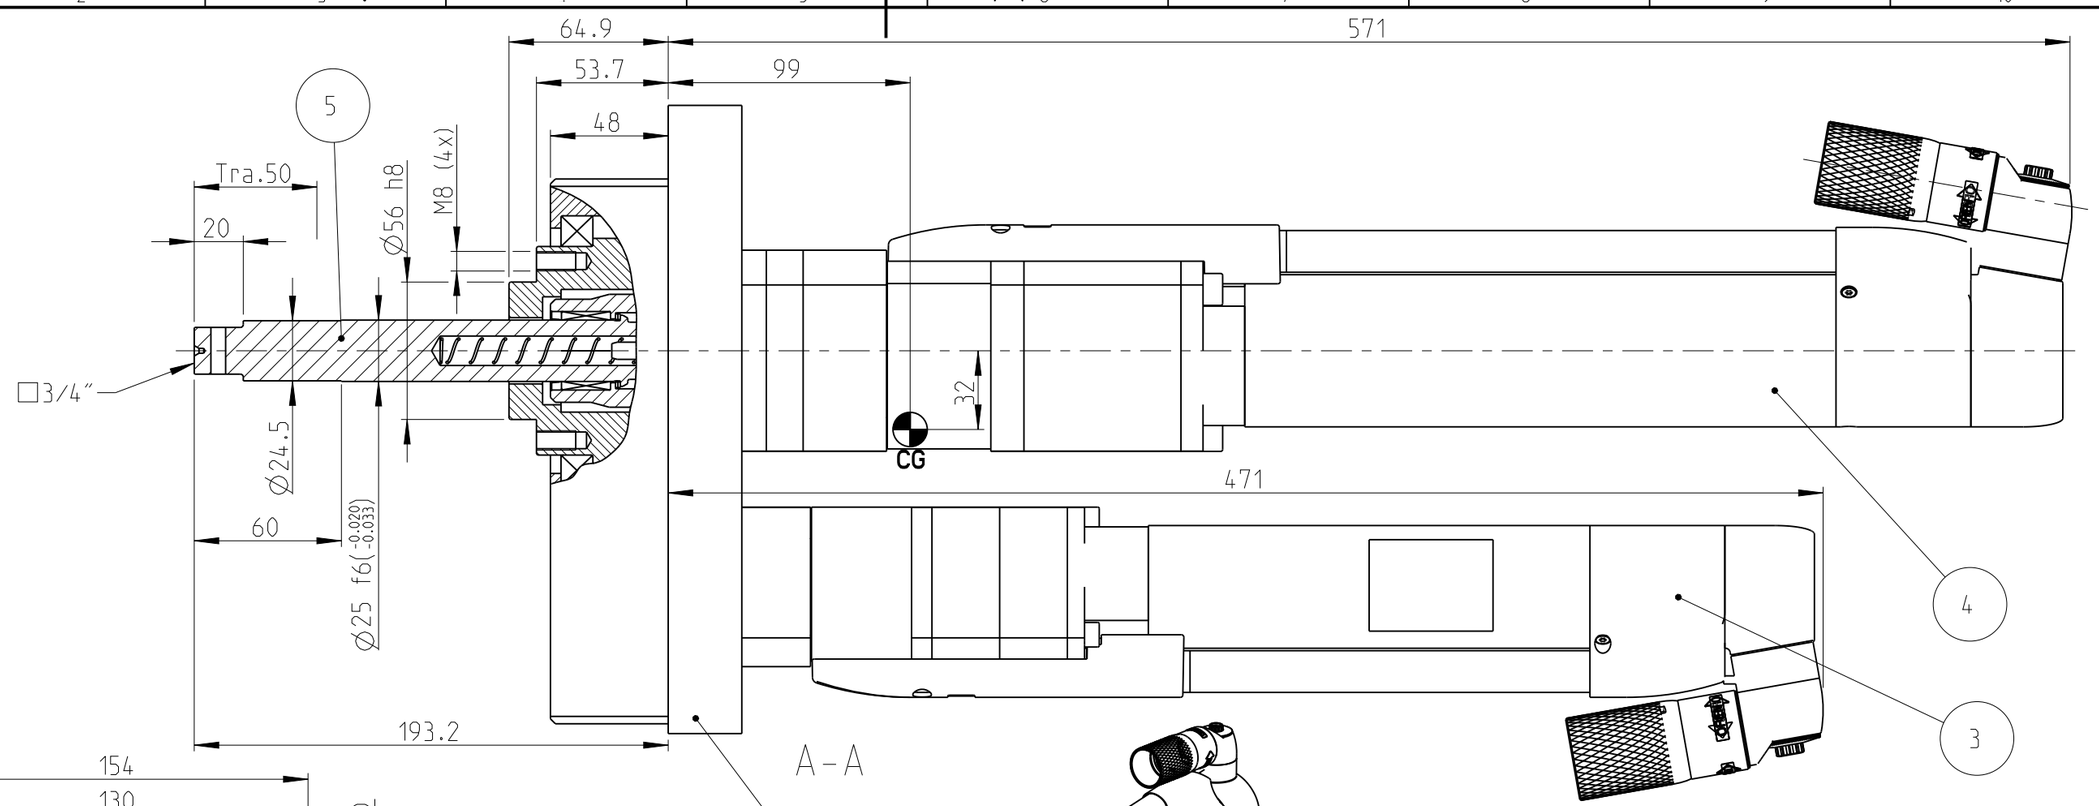

* FOR GREASE INSTRUCTION SEE PZ4113

SP = Specially designed part. Not available as standard spare part.

Max torque 230/150 Nm. Max speed 330/380 rpm.

Pos	Designation	Number	Name	Comment	Class
5	4232 5410 00	1	SOCKET HOLDER	QST62	SP
4	8435 4083 05	1	QST62-230CT (WITHOUT SOCKET HOLDER)	Max torque 230Nm. Max speed 330 rpm.	
3	4230 2895 80	1	QST50-150CT	Max torque 150 Nm. Max speed 380 rpm.	
2	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
1	4232 7627 80	1	GEAR BOX, i = 1	-	SP

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Note	Pos.	Modified from	Date	Intr.
0	-	-	-	-

Name: QST62-230CT-T50-H19/QST50-150CTO –

Material: – –

Secrecy class: 1102 K/-

CAD: Creo

Atlas Copco

Transferred from: –

Scale	Format	Family	Compare	Drawing owner
2:5	A3	MK2	–	TOO
Drawn: H Petrén		Blank: –	Replaces: –	
Cons.class: 1295 K/-	Rev: 0	Status: Released	Designation: 9831 4042 29	Sheet 1 (1)
Mass/Volume: 32 kg		Date: 2016-11-01		

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.