
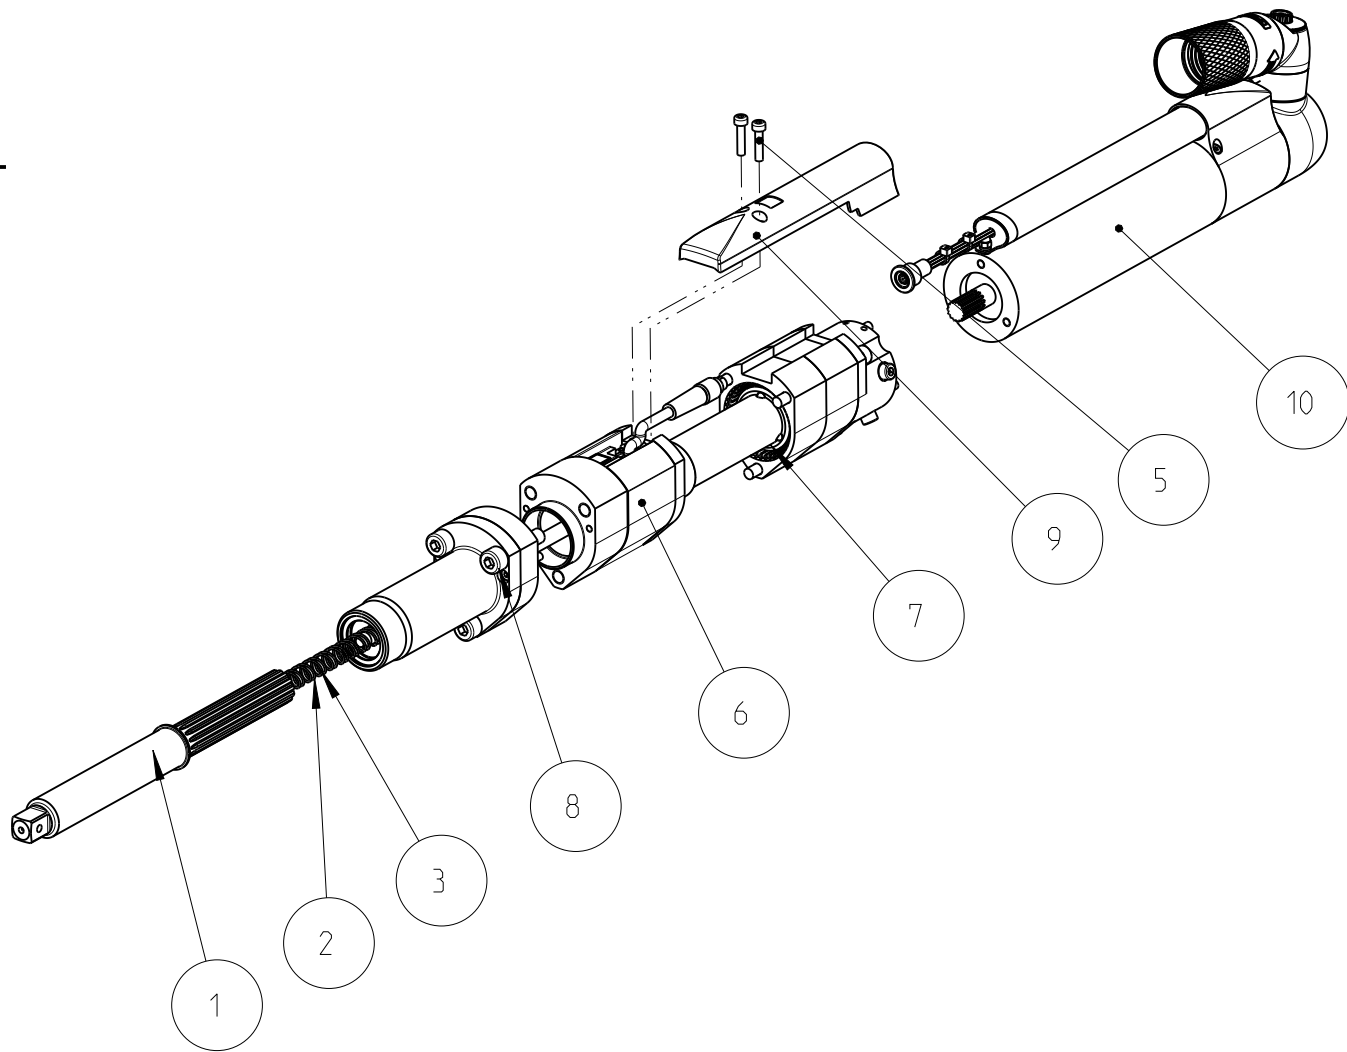


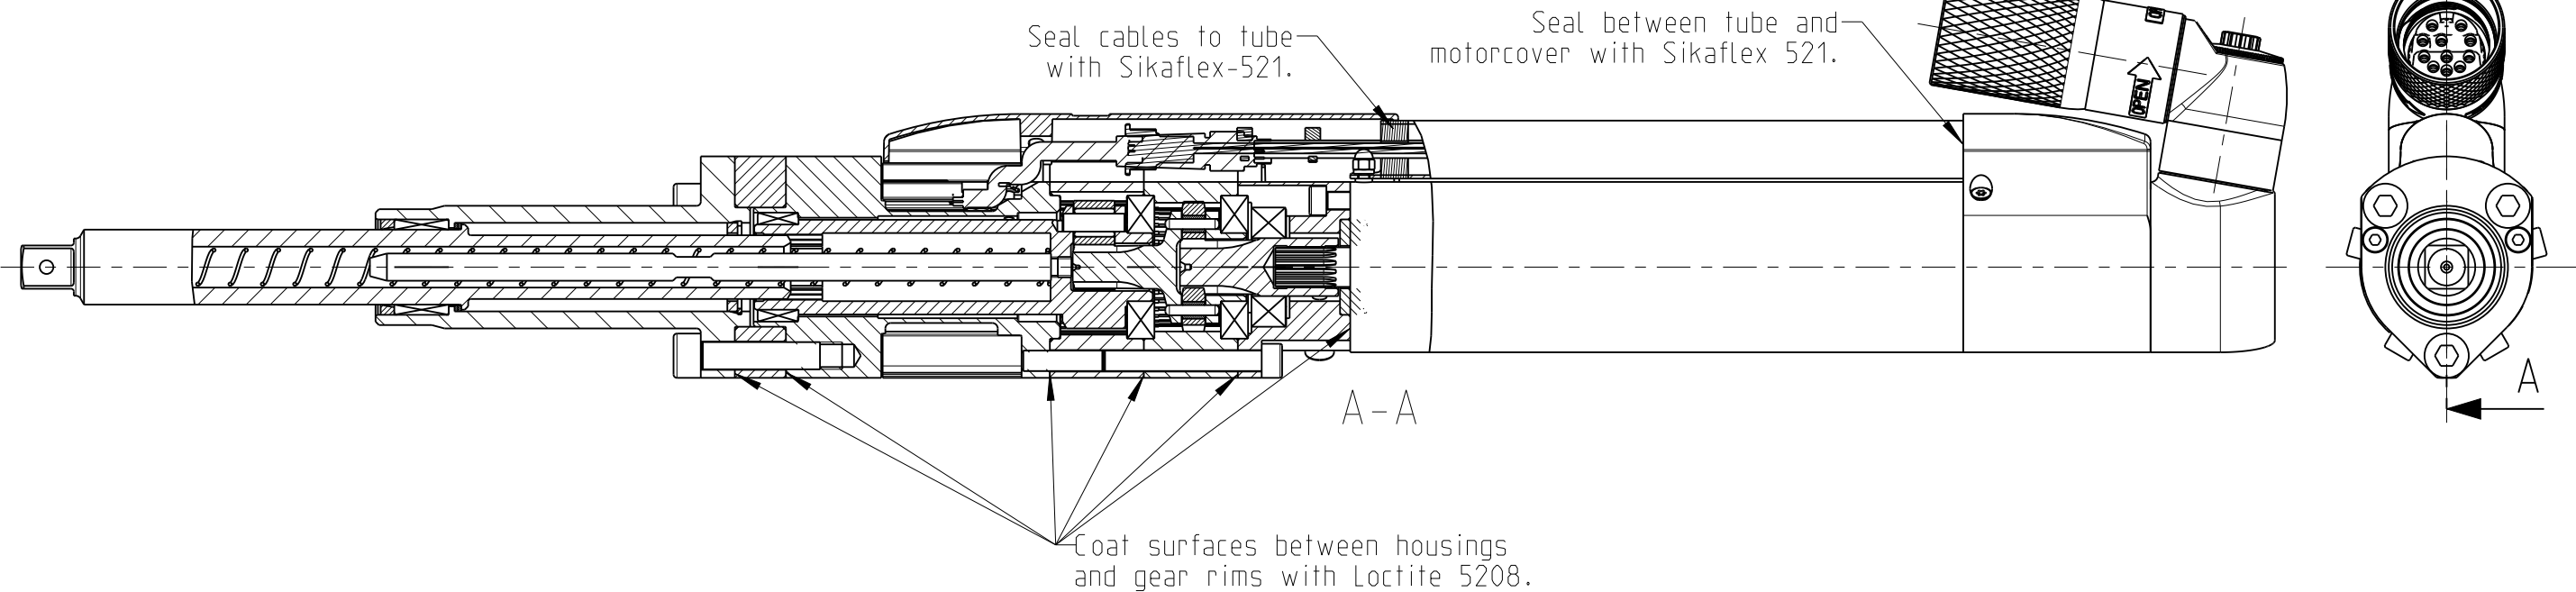

* For grease instruction see PZ4113

sp=Specially designed part , not available as standard spare part.

Max torque 90 Nm. Max speed 650 rpm. Tra 3"

10	4230 3012 80	1	MOTOR	QST 50	
9	4230 2645 10	1	CABLE RAIL	QST 50	
8	4230 2121 80	1	FRONT PART	QMX50 Tra. 3''	
7	4232 0980 81	1	GEAR UNIT	QMX50 L=18.21 Tra.3'' ((36/14)+1)((41/10)+1)	sp
6	4230 2973 80	1	TRANSDUCER	QDT50-100	
5	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9	
4	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
3	4230 2129 00	1	COMPRESSION SPRING	38-51N Tra.3''	
2	4230 2128 00	1	COMPRESSION SPRING	20-30N Tra.3''	
1	4230 2127 00	1	SOCKET HOLDER	1/2" ±0mm 3" travel QM5 thru hole	
Pos	Designation	Number	Name	Comment	






Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name	QST50-90CT-T76-L200-H13				Secrecy class
Material	-				1102 K/-
	-				CAD Pro/E


Atlas Copco	Scale	1:2	Format	A3	Family	MK2_G	Compare	-	Drawing owner
	Drawn	tooten		Blank	-		Replaces	-	
	Transferred from	SW		Cons.class	1295 K/-	Rev	5	Status	Released
				Mass/Volume	-		Date	2006-11-09	Designation
								9831 4078 31	

5	D8	Added info about pressure level and air quality.	2019-04-03	MiK
Note	Pos.	Modified from	Date	Intr.

5	D8	Added info about pressure level and air quality.	2019-04-03	MiK
Note	Pos.	Modified from	Date	Intr.

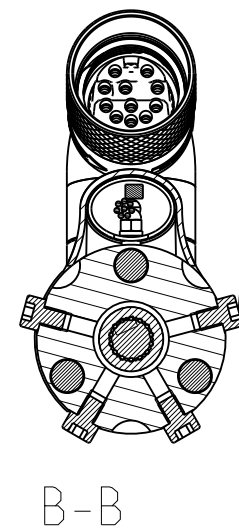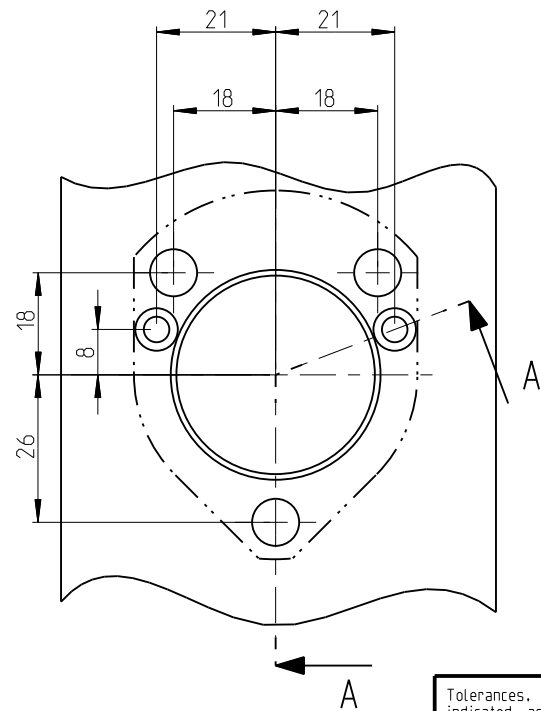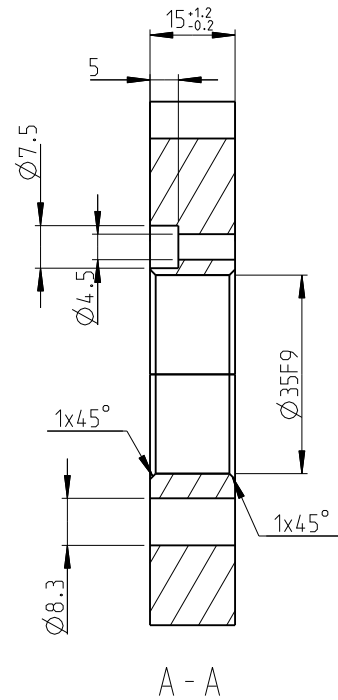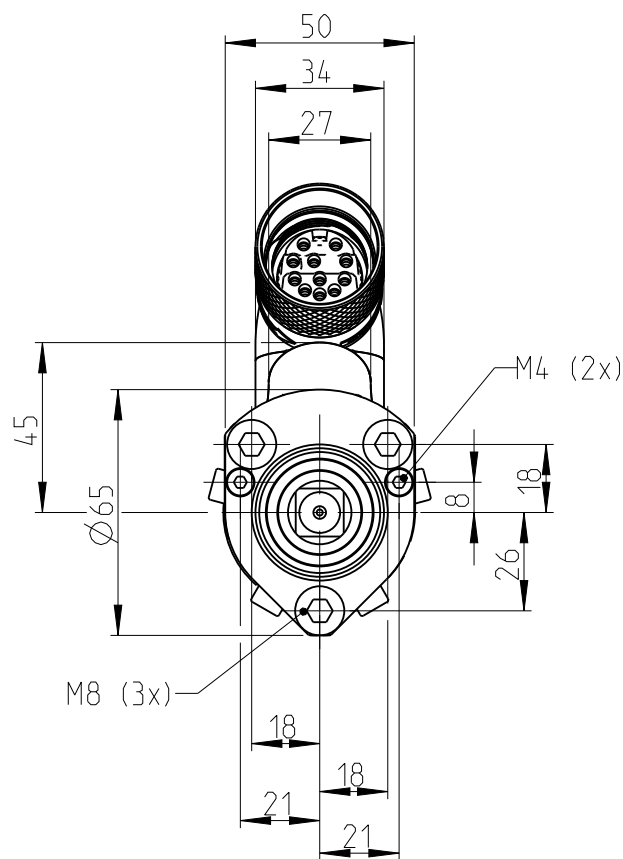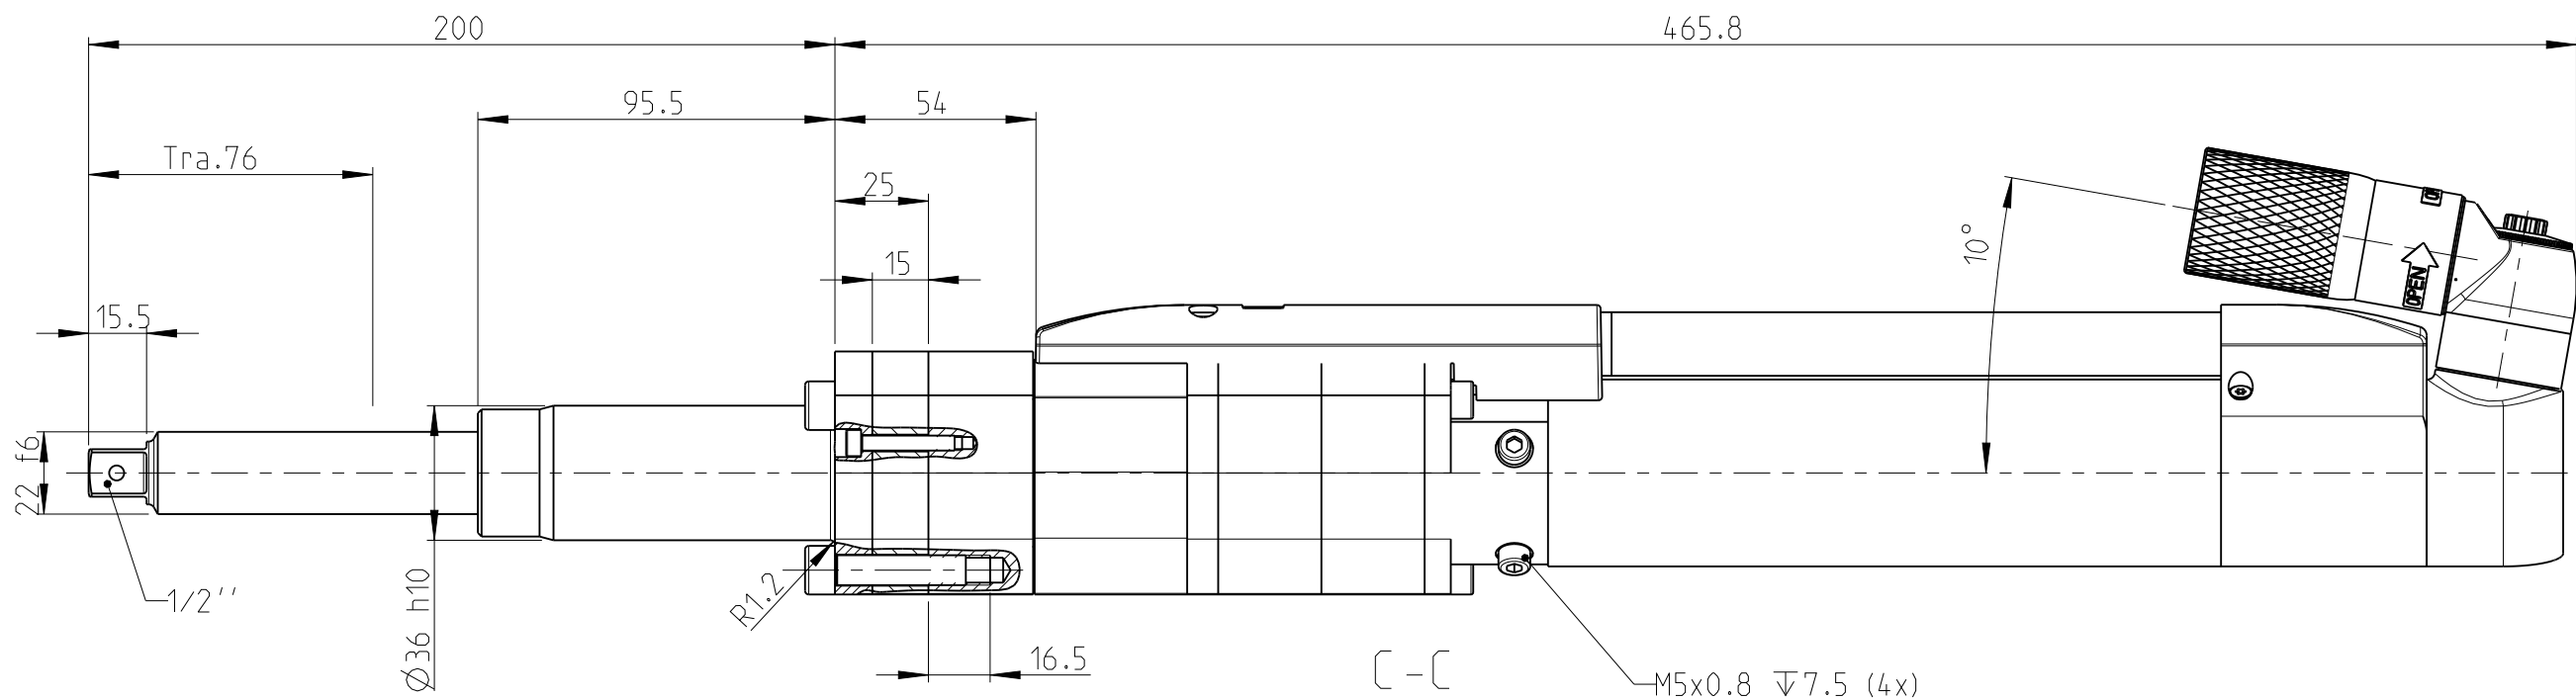

5

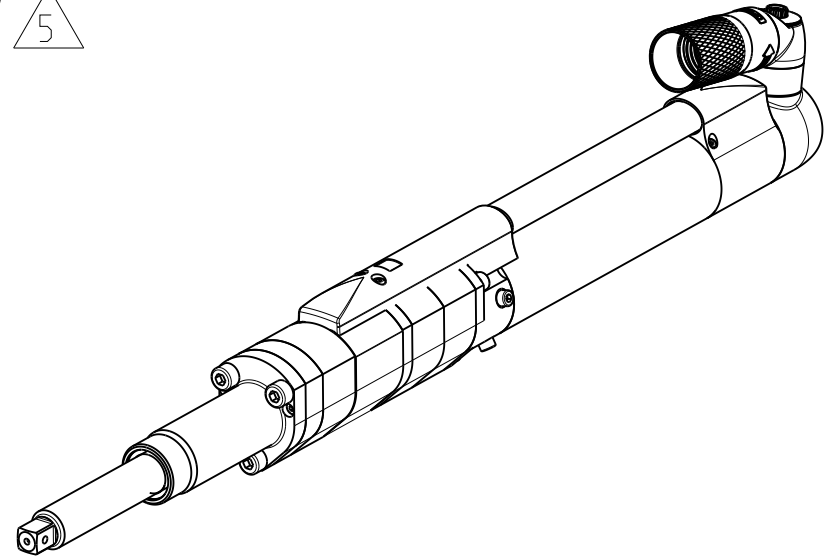

HOLES MUST BE DRILLED IN BASE PLATE FOR OUTSIDE FITTED FRONT PART.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST50-90CT-T76-L200-H13					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
		Scale 1:2	Format A3	Family MK2_G	Compare -	Drawing owner
tooten		Drawn	Blank -	Replaces -	T00	
Transferred from SW		Cons.class 1295 K/-	Rev 5	Status Released	Designation	Sheet 2 (2)
Mass/Volume -		Date 2006-11-09		9831 4078 31		