


A-A

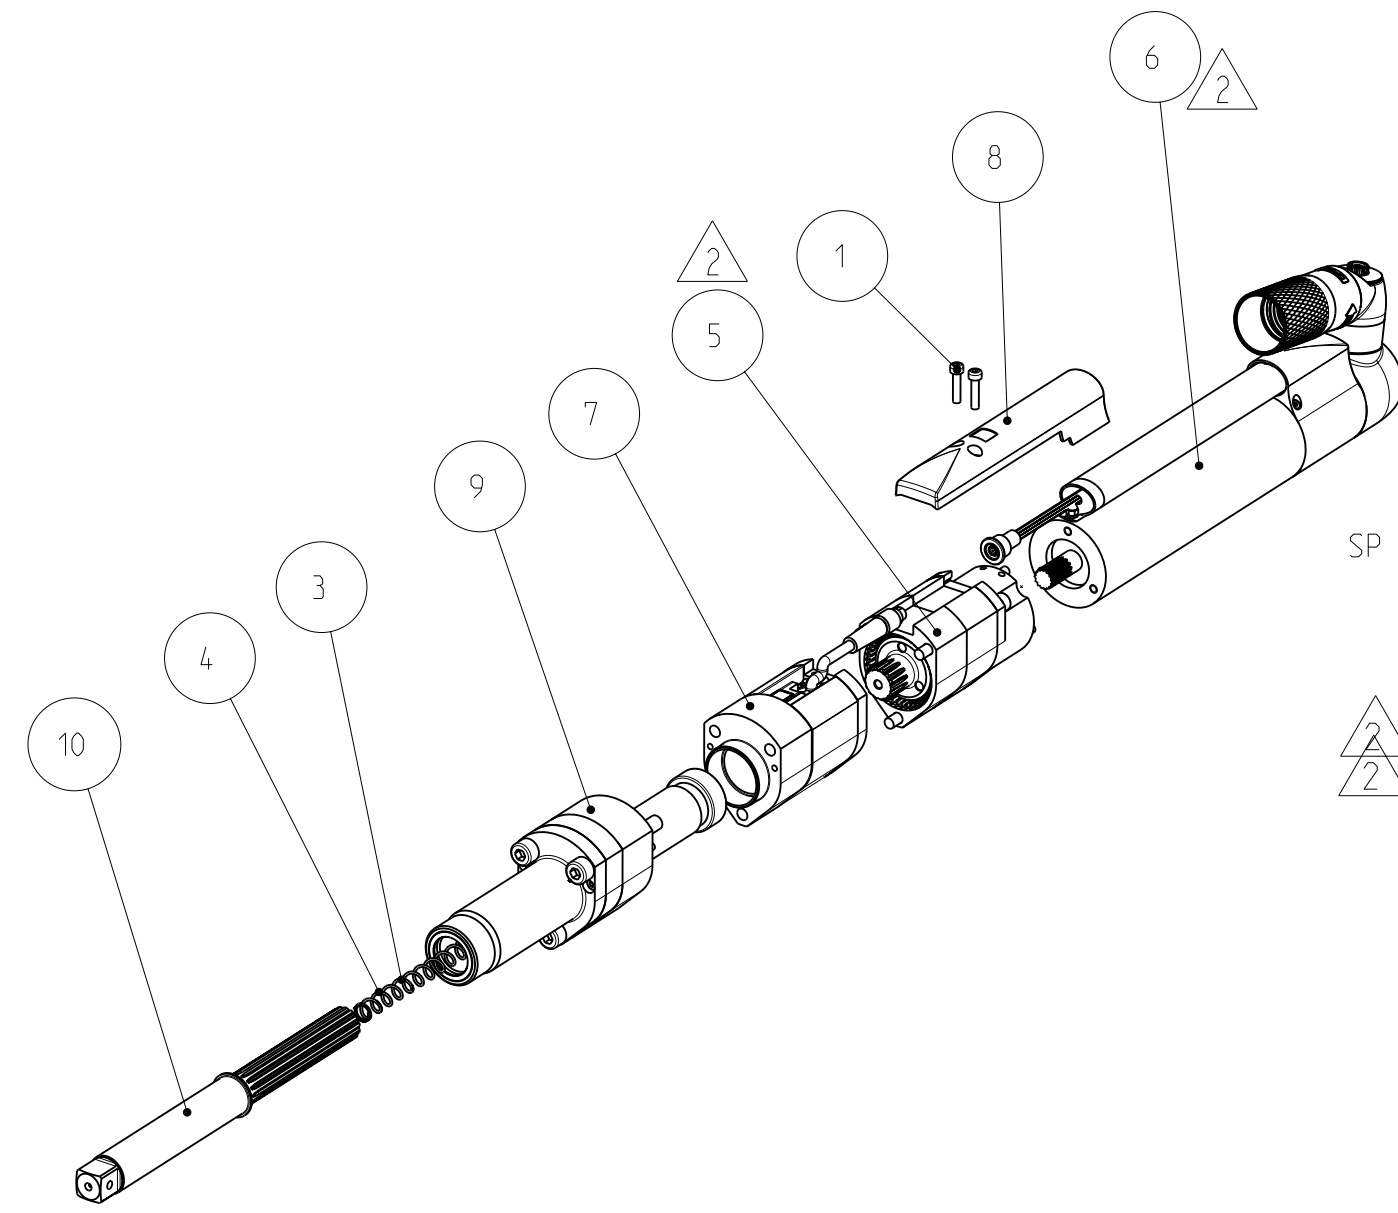

Strongest compression spring mounted at delivery.

* FOR GREASE INSTRUCTION SEE PZ4113.

COMMENT: MAX TORQUE 150 Nm. MAX SPEED 380 rpm.

SP = Specially designed part. Not available as standard spare part.

10	4232 3967 01	1	SOCKET HOLDER	5/8" ±0mm :tra 76 :thru hole	SP
9	4230 2711 80	1	FRONT PART	QST50. TRA 3''	
8	4230 2645 10	1	CABLE RAIL	QST 50	
7	4230 2973 80	1	TRANSDUCER	QDT50-100	
6	4230 3012 80	1	MOTOR	QST 50	
5	4230 2171 81	1	GEAR UNIT	ETX50 ''50'': i=((41/8)+1)*((41/10)+1)~31.24	
4	4230 2129 01	1	COMPRESSION SPRING	37-55N Tra.76	-
3	4230 2128 01	1	COMPRESSION SPRING	20-30N Tra.76	Sp
2	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
1	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9	
Pos	Designation	Number	Name	Comment	Class

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-


Name QST50-150CT-T76-L200-H16				Secrecy class -	
Material -				1102 K/-	
-				CAD Pro/E	
Scale 1:2		Format A3	Family MK2_G	Compare -	Drawing owner
Drawn B Nilsson		Blank -		Replaces -	T00
Cons.class 1295 K/-		Rev 2	Status RELEASED	Designation	
Mass/Volume 6.5 kg		Date 2011-06-10	9831 4078 97		

2	-	New connector; motor and transducer replaced = MK2	2011-08-02	TEN
Note	Pos.	Modified from	Date	Intr.

Model name	9831407897	Rev.Ver	2.1
Drawing name	9831407897	Rev.Ver	2.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

2	-	New connector; motor and transducer replaced = MK2	2011-08-02	TEN
Note	Pos.	Modified from	Date	Intr.

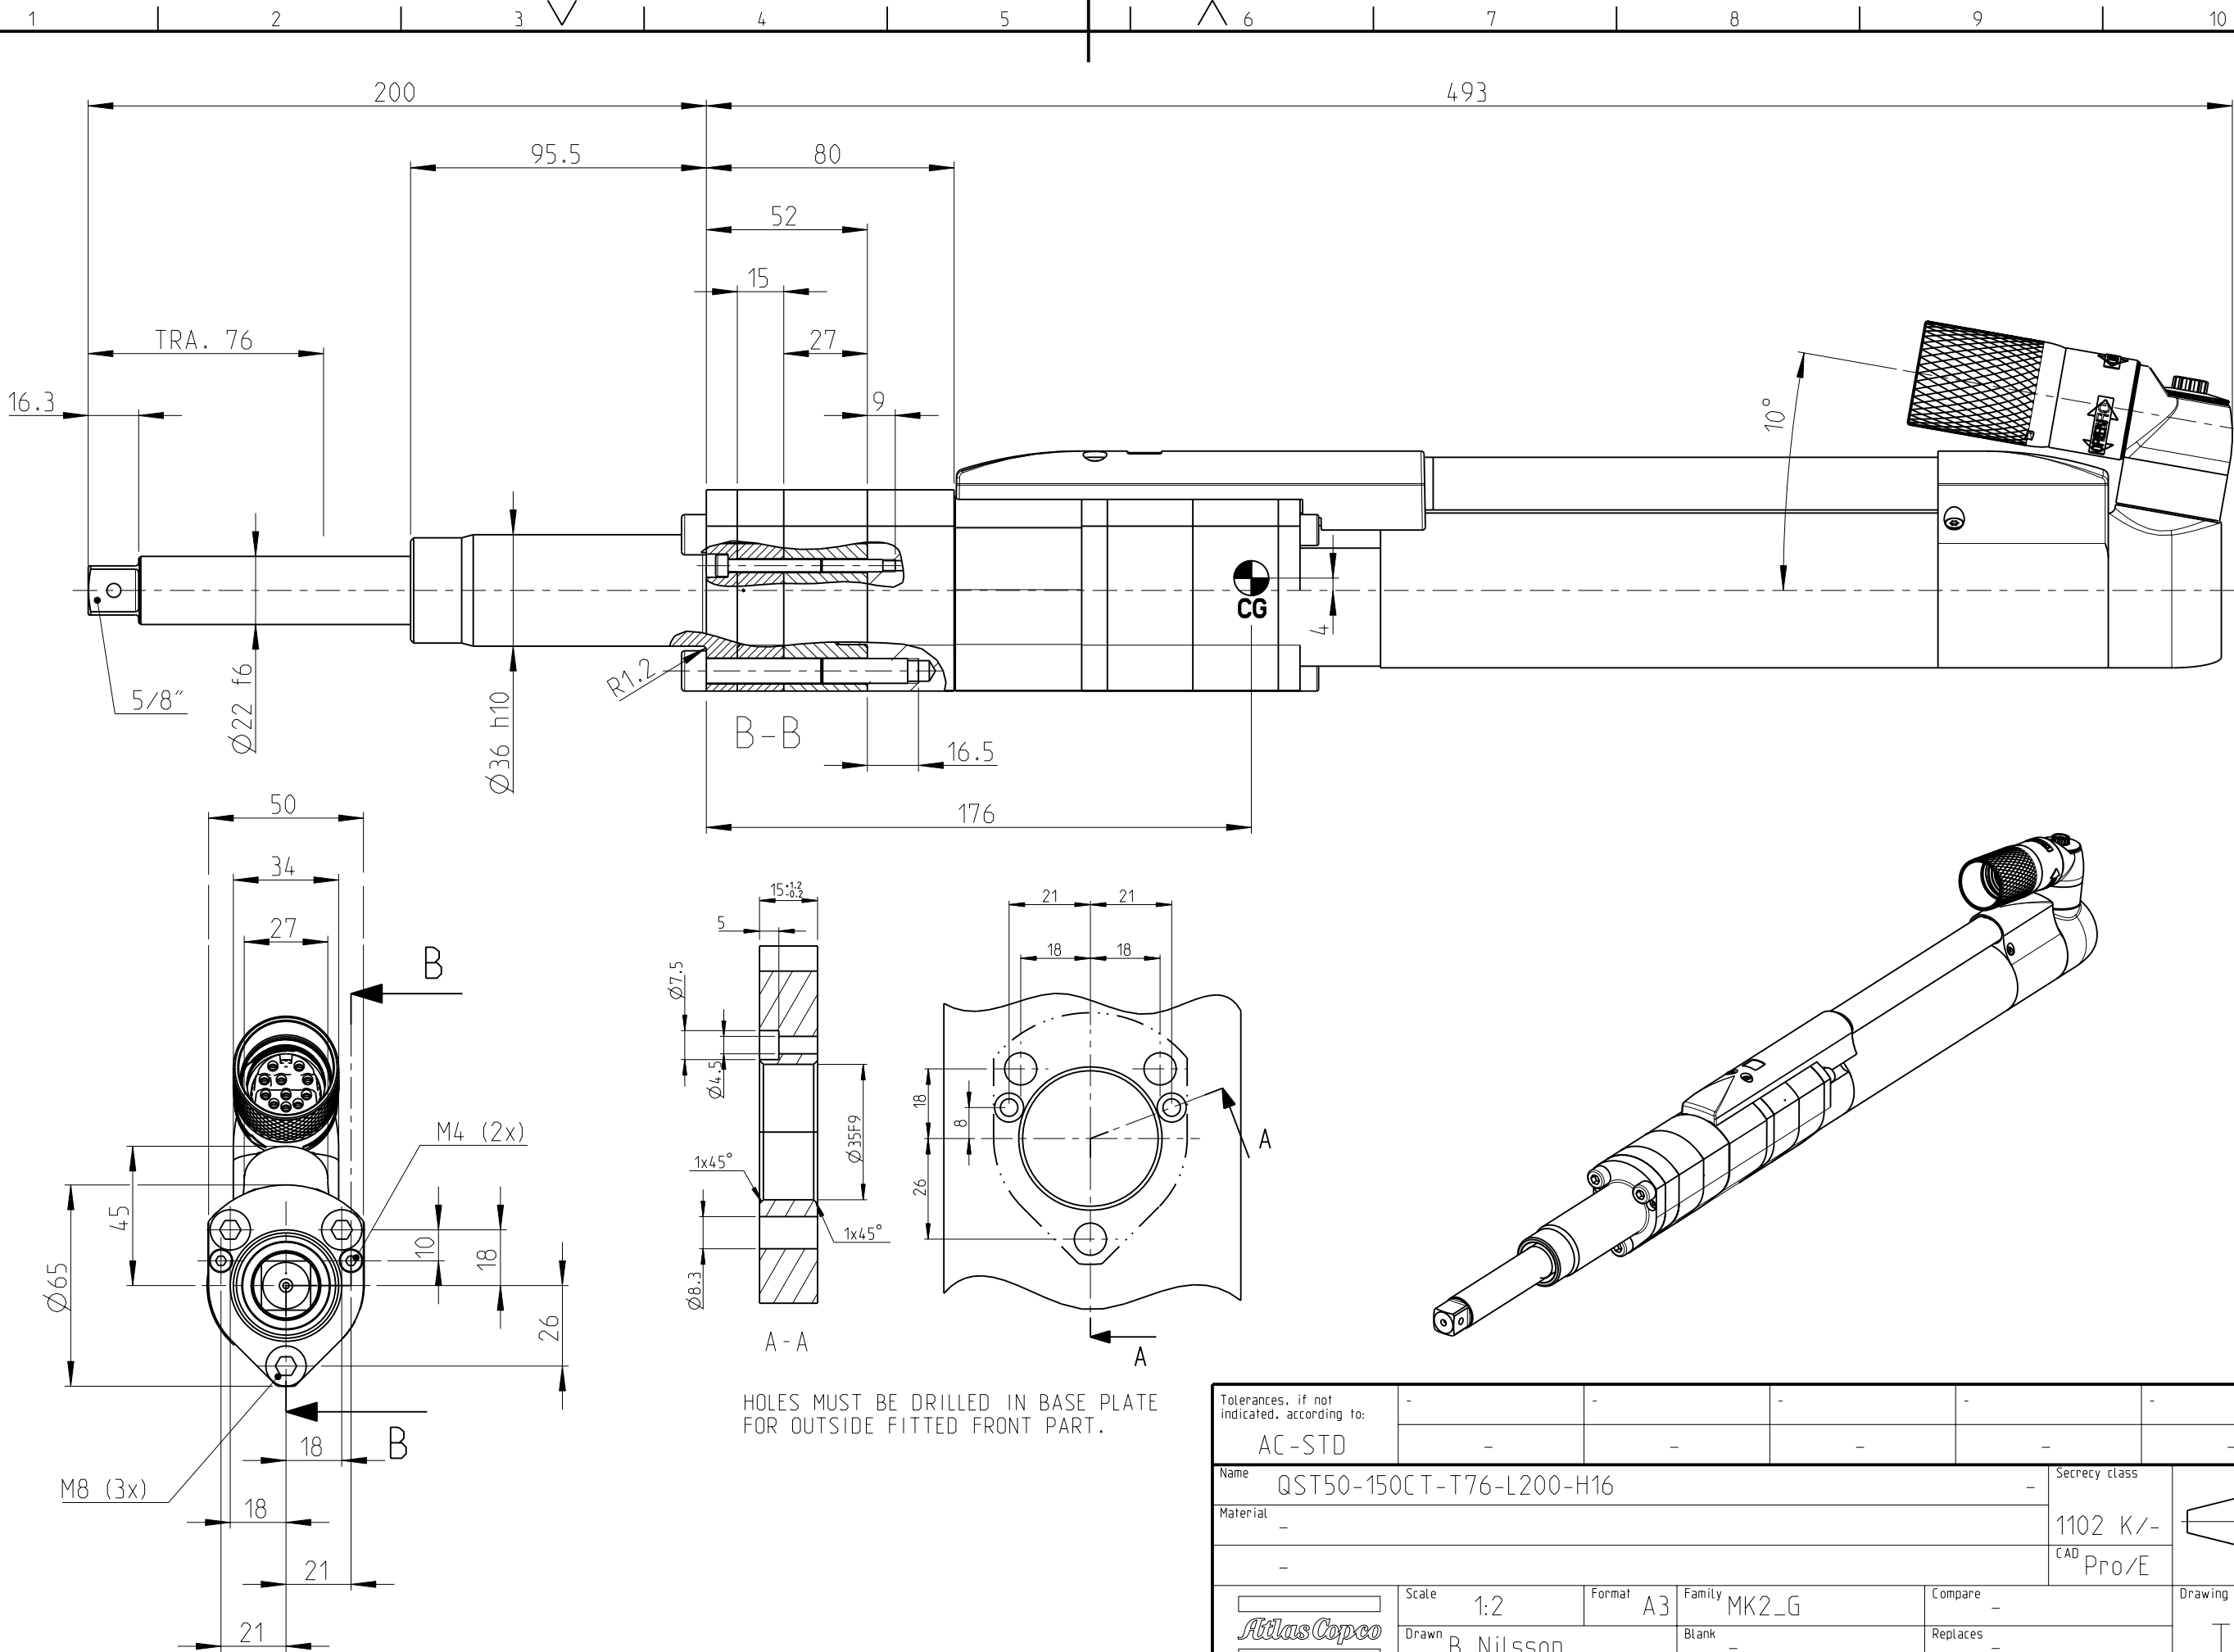

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST50-150CT-T76-L200-H16					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
 <i>Atlas Copco</i> 		Scale 1:2	Format A3	Family MK2_G	Compare -	Drawing owner
Drawn B Nilsson			Blank -	Replaces -		TOO
Transferred from -		Cons.class 1295 K/-	Rev 2	Status RELEASED	Designation	Sheet 2 (2)
		Mass/Volume 6.5 kg	Date 2011-06-10	9831 4078 97		