
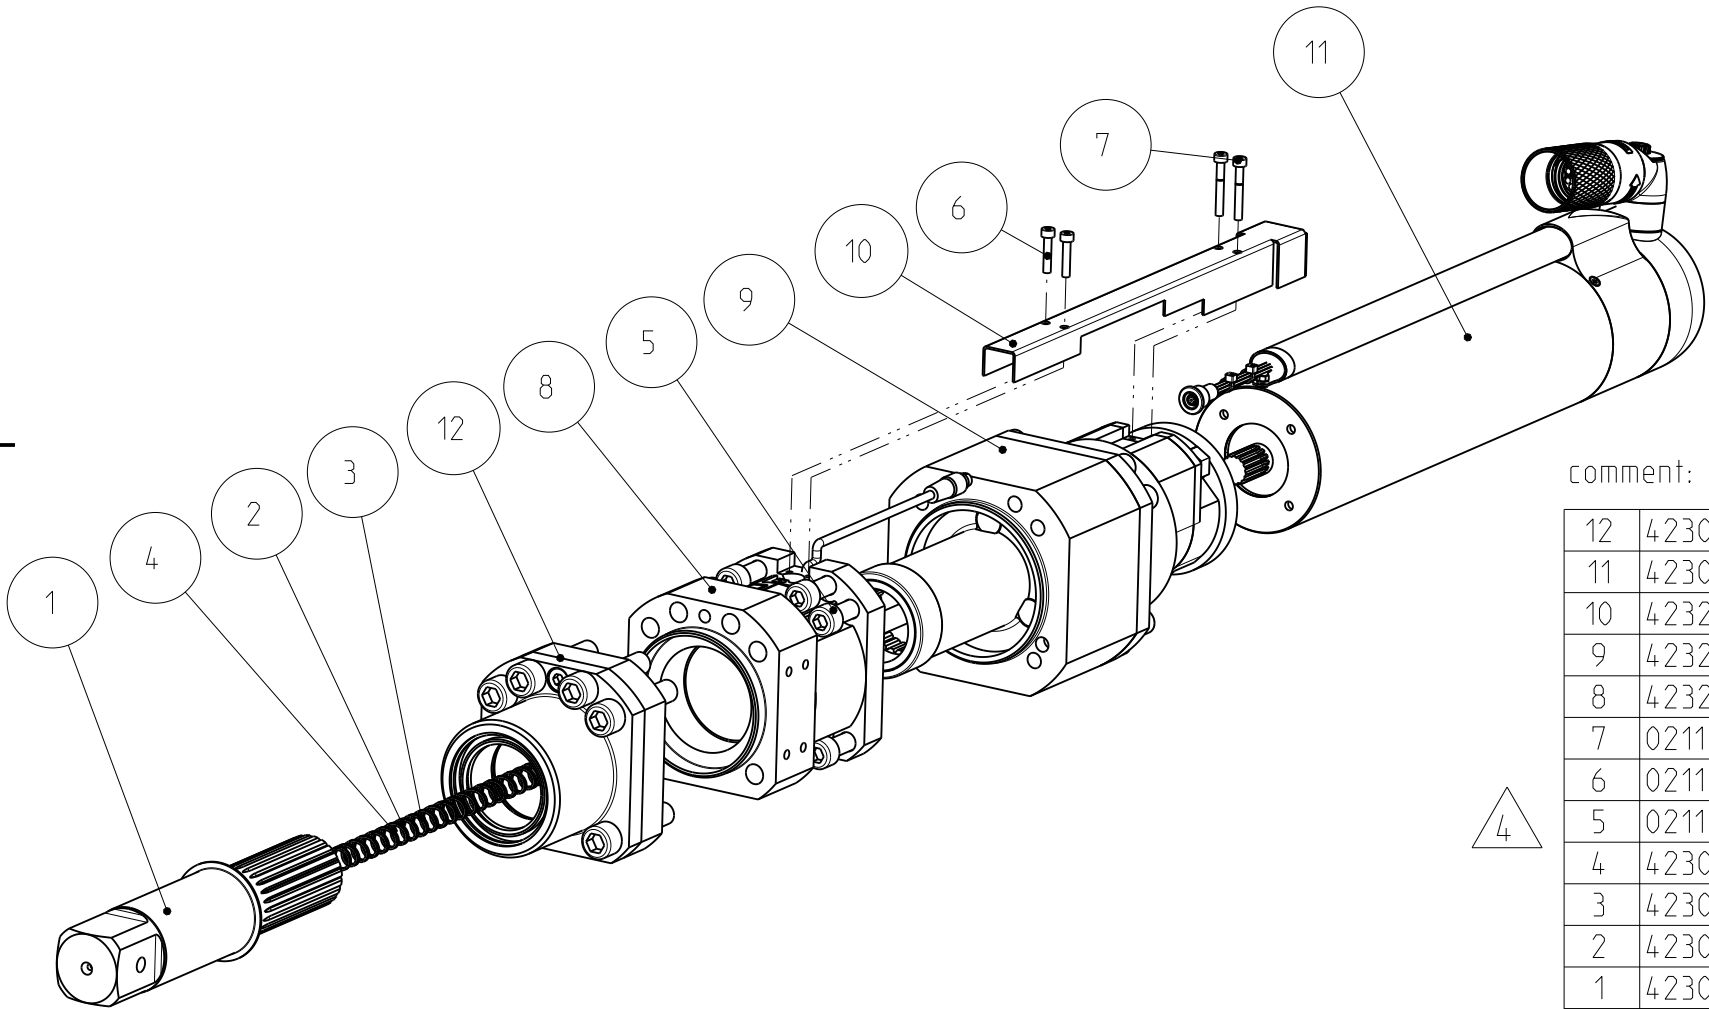


A - A

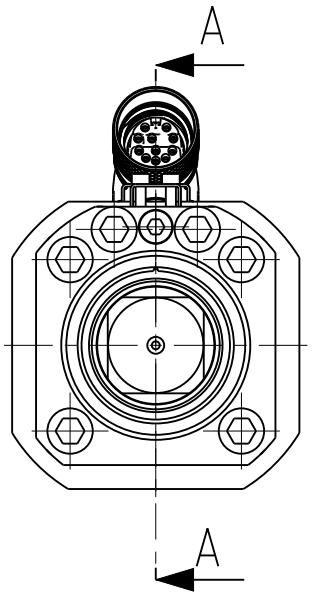

FOR GREASE INSTRUCTION SEE PZ 4113


SP= Specially designed part, not available as standard spare part.

comment: Max torque 2800 Nm. Max speed 40 rpm.

12	4230 2777 80	1	FRONT PART	QST95	-
11	4230 3014 80	1	MOTOR	QST80/90	
10	4232 3550 00	1	CABLE RAIL	QMX114	SP
9	4232 0220 81	1	GEAR UNIT	QMX 114 : i = (47/8 +1) * (33/10 +1) * (44/11 +1)=147,8	SP
8	4232 6046 80	1	TRANSDUCER	QDT95-2000	SP
7	0211 1177 00	2	HEX SOCK SCREW	MC6S M4x30 12.9	
6	0211 1174 00	2	HEX SOCK SCREW	MC6S M4x20 12.9	
5	0211 1363 00	6	HEX SOCK SCREW	MC6S M10x30 12.9	
4	4230 1828 00	1	COMPRESSION SPRING	64-80N	
3	4230 1828 01	1	COMPRESSION SPRING	29-45N	
2	4230 1828 02	1	COMPRESSION SPRING	130-160N	
1	4230 2767 00	1	SOCKET HOLDER	1 1/2"	-
Pos	Designation	Number	Name	Comment	Class

Tolerances, if not indicated, according to:		-		-		-		-		-	
AC-STD		-		-		-		-		-	
Name QST114-2800CT-T50-L149-H38										Secrecy class	
Material -										1102 K/-	
-										CAD Pro/E	
Atlas Copco		Scale 1:3		Format A3		Family MK2_G		Compare -		Drawing owner	
-		Drawn PLK		Blank -		Replaces -		-		T00	
Transferred from -		Cons.class 1295 K/-		Rev 4		Status Released		Designation		Sheet 1 (2)	
-		Mass/Volume 28kg		Date 2008-05-26		9831		4082		23	

4	E6	Changed screws to 0211136300. Were 0211136200.	2019-01-21	MiK
Note	Pos.	Modified from	Date	Intr.

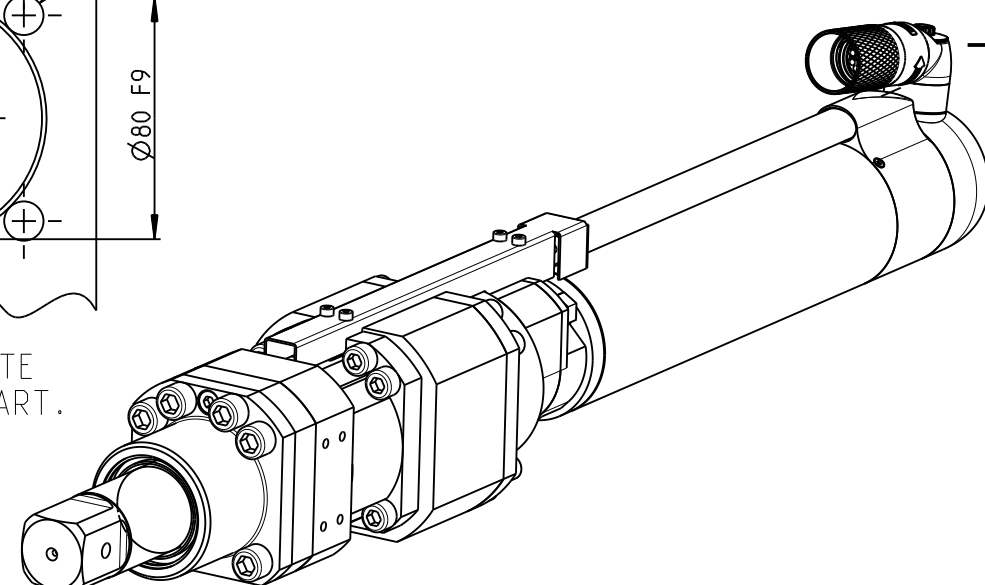Rev. Ver 4.5[illegible]

Intr.	
-------	--

Designation	Sheet 2 (2)
9831 4082 23	