


Model name	Rev.Ver
9831408227	3.4

Drawing name	Rev.Ver
9831408227	3.4

A-A

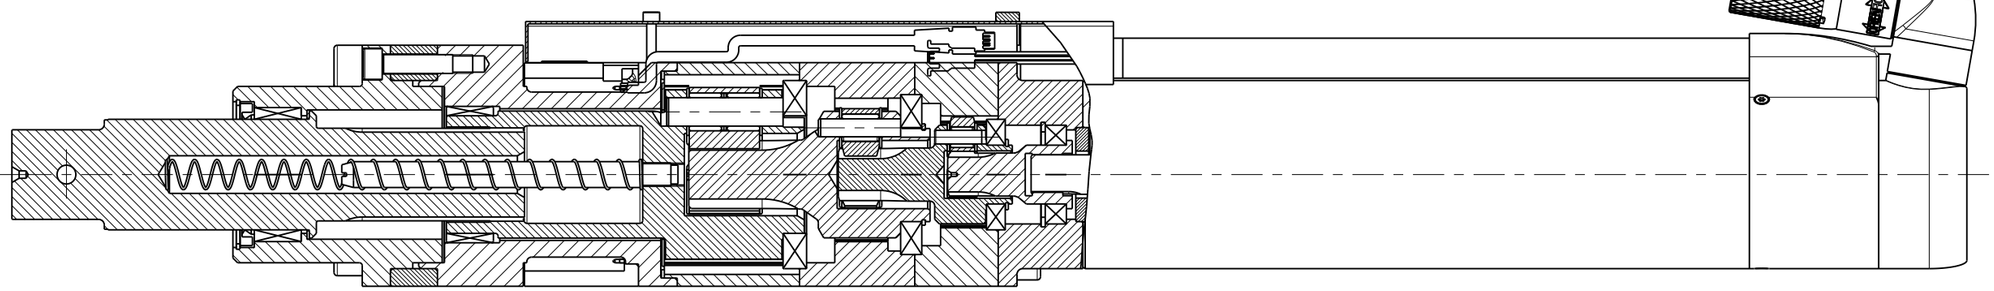

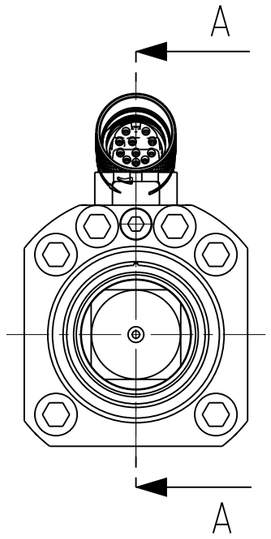

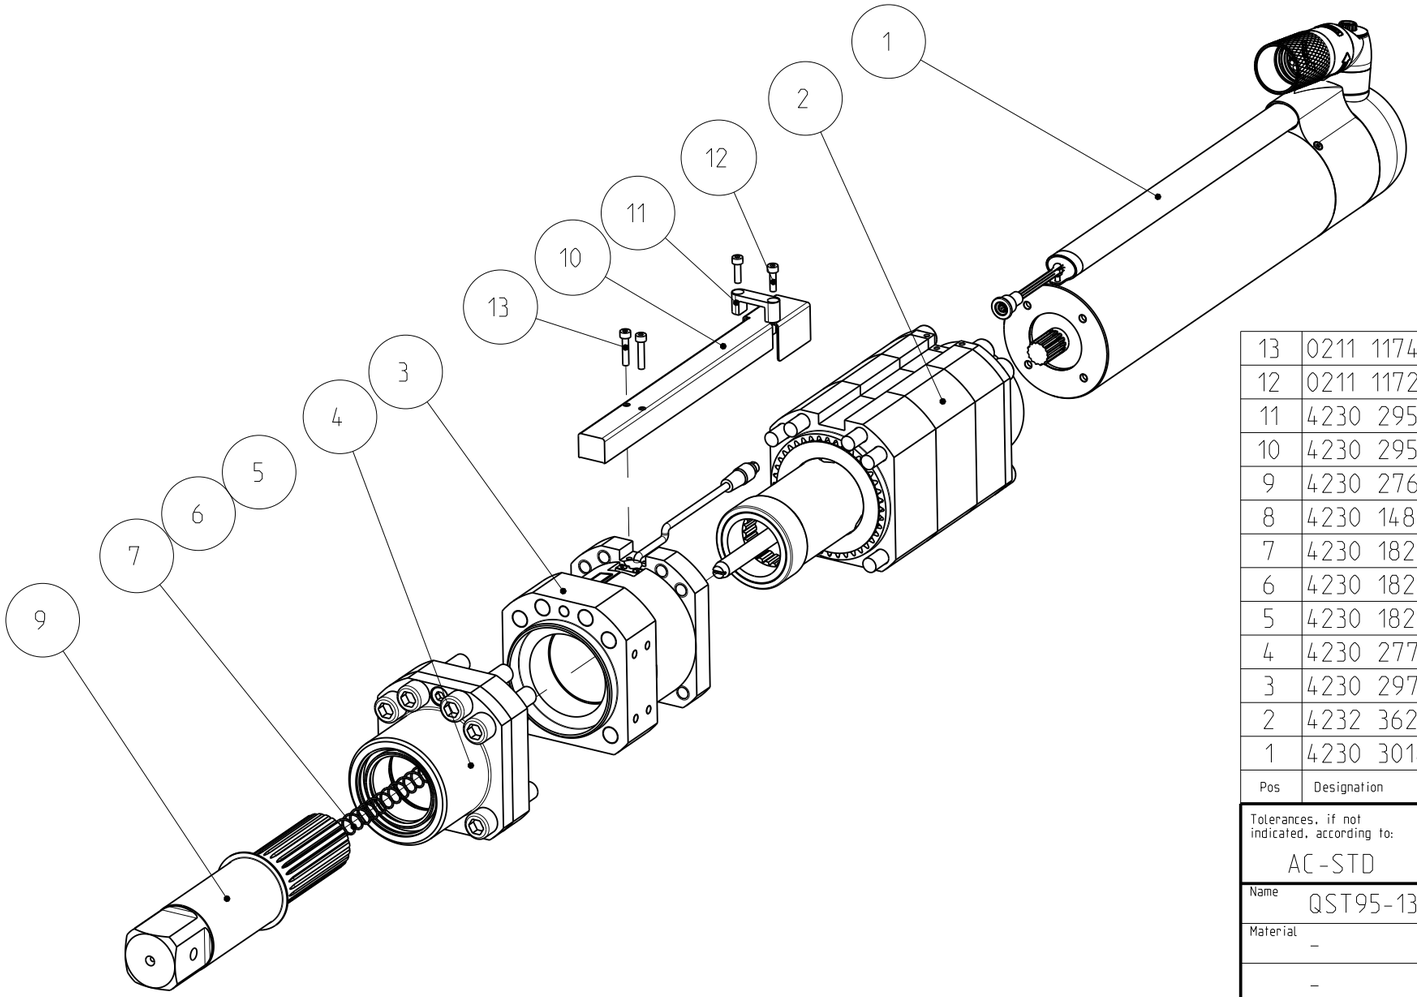

* FOR GREASE INSTRUCTION SEE PZ4113

Strongest compression spring mounted at delivery.

Max torque: 1300 Nm; Max speed: 80 rpm.

Pos	Designation	Number	Name	Comment
13	0211 1174 00	2	HEX SOCK SCREW	MC6S M4x20 12.9
12	0211 1172 00	2	HEX SOCK SCREW	MC6S M4X14 12.9
11	4230 2952 00	1	CLAMP	-
10	4230 2951 00	1	CABLE RAIL	-
9	4230 2767 00	1	SOCKET HOLDER	1 1/2"
8	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
7	4230 1828 00	1	COMPRESSION SPRING	64-80N
6	4230 1828 01	1	COMPRESSION SPRING	29-45N
5	4230 1828 02	1	COMPRESSION SPRING	130-160N
4	4230 2777 80	1	FRONT PART	QST95
3	4230 2977 80	1	TRANSDUCER	QST95
2	4232 3626 80	1	GEAR BOX, i=73.37	-
1	4230 3014 80	1	MOTOR	QST80/90

Tolerances, if not indicated, according to:					
AC-STD	-	-	-	-	-
	-	-	-	-	-

Note	Pos.	Modified from	Date	Intr.
3	F6	New connector: Motor & Transducer replaced = MK2	2017-01-10	HPN

Name: QST95-1300CT-T50-L149-H38 –

Material: – –

Secrecy class: 1102 K/-

CAD: Pro/E


Atlas Copco

Transferred from: –


Scale	Format	Family	Compare	Drawing owner
23:60	A3	MK2	–	T00
Drawn: R LaMadrid		Blank: –	Replaces: –	
Cons.class: 1295 K/-	Rev: 3	Status: Released	Designation: 9831 4082 27	Sheet 1 (2)
Mass/Volume: 28.5 kg		Date: 2008-08-22		

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

Model name	Rev.Ver
9831408227	3.4
Drawing name	Rev.Ver
9831408227	3.4

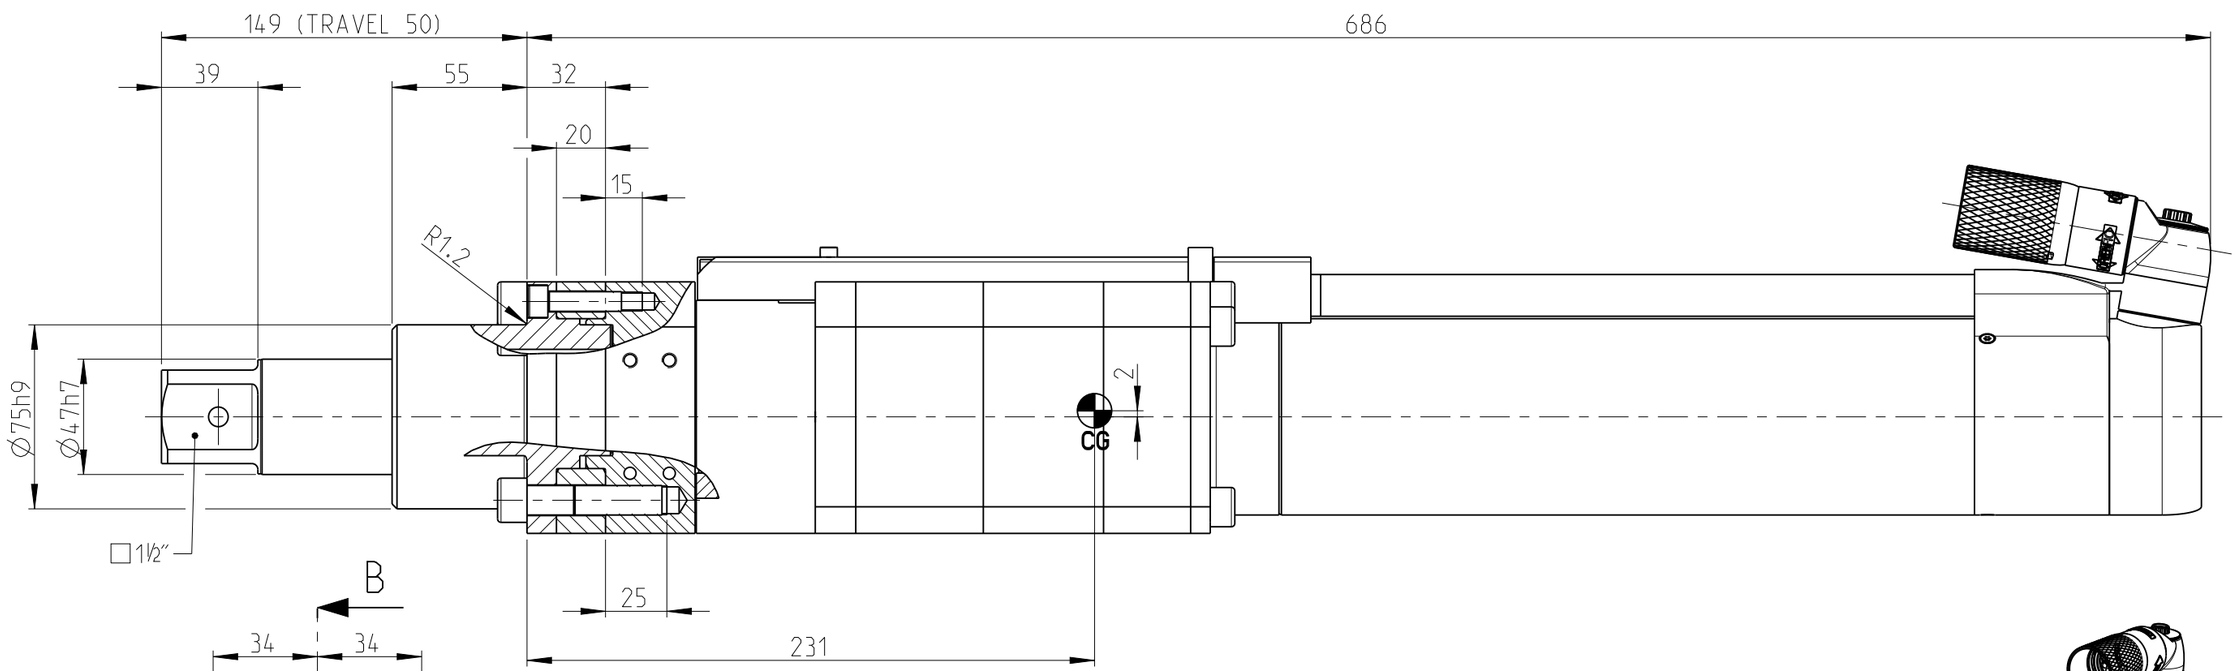

HOLES TO DRILL IN BASE PLATE
FOR OUTSIDE FITTED FRONTPART.

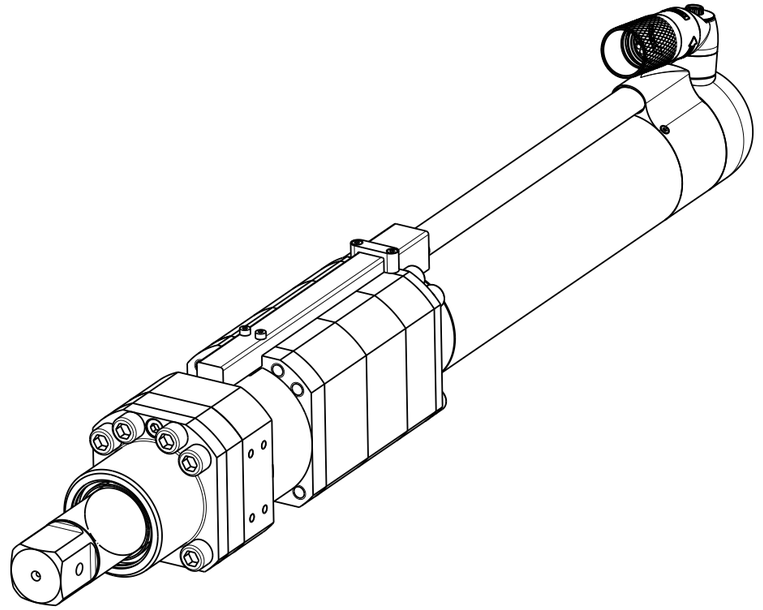

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name QST95-1300CT-T50-L149-H38 –				Secrecy class 1102 K/-	
Material –					
–				CAD Pro/E	
Atlas Copco	Scale 1:5	Format A3	Family MK2	Compare –	Drawing owner TOO
	Drawn R LaMadrid		Blank –	Replaces –	
Transferred from –	Cons.class 1295 K/-	Rev 3	Status Released	Designation 9831 4082 27	Sheet 2 (2)
	Mass/Volume 28.5 kg		Date 2008-08-22		

3	F6	New connector: Motor & Transducer replaced = MK2	2017-01-10	HPN
Note	Pos.	Modified from	Date	Intr.

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.