



Model name	9831408647	Rev. Ver ⁿ	3.1
Drawing name	9831408647	Rev. Ver ⁿ	3.1

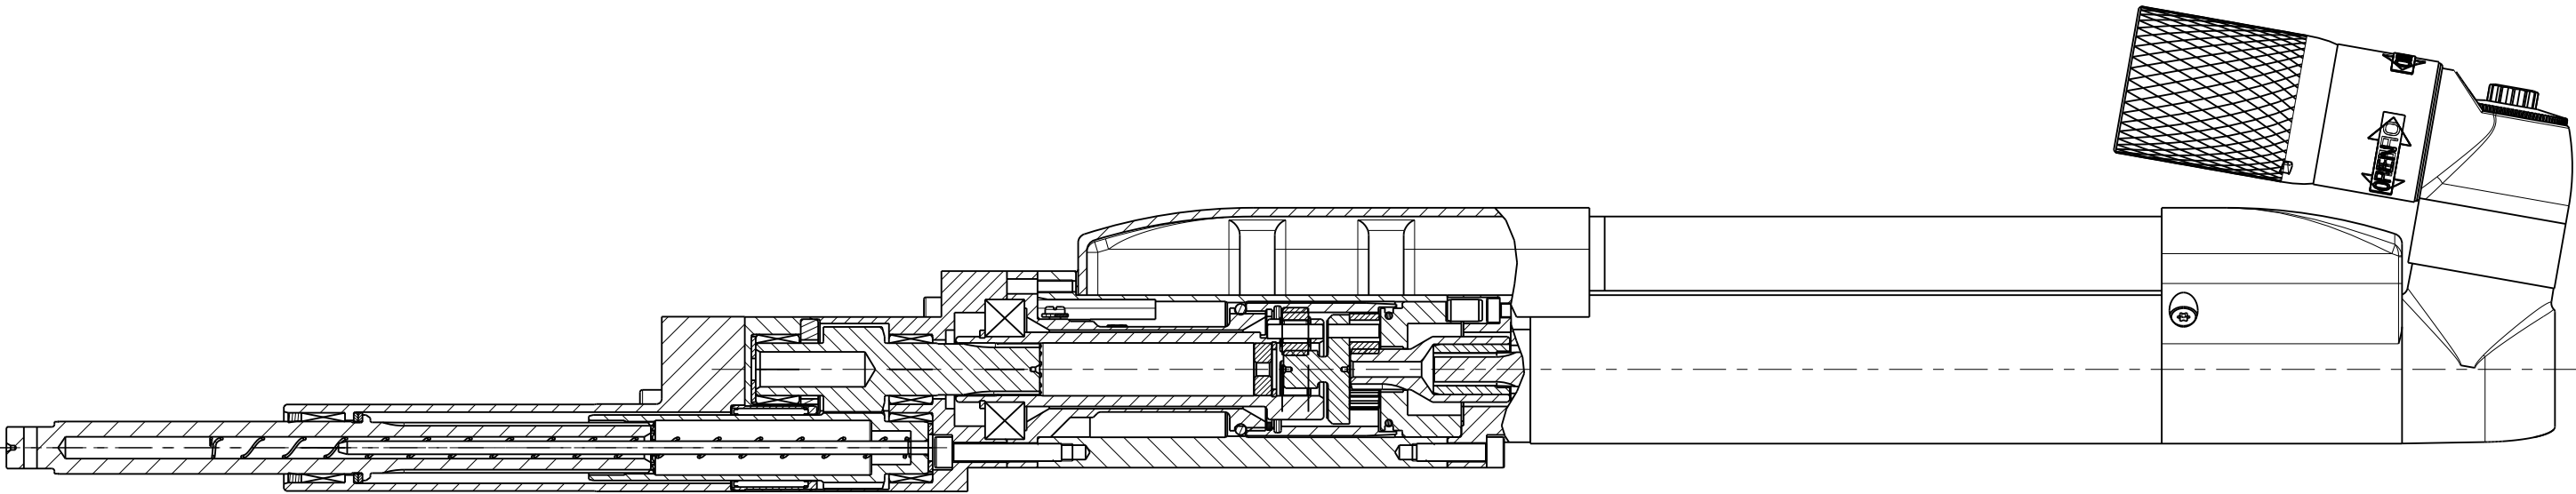

A-A

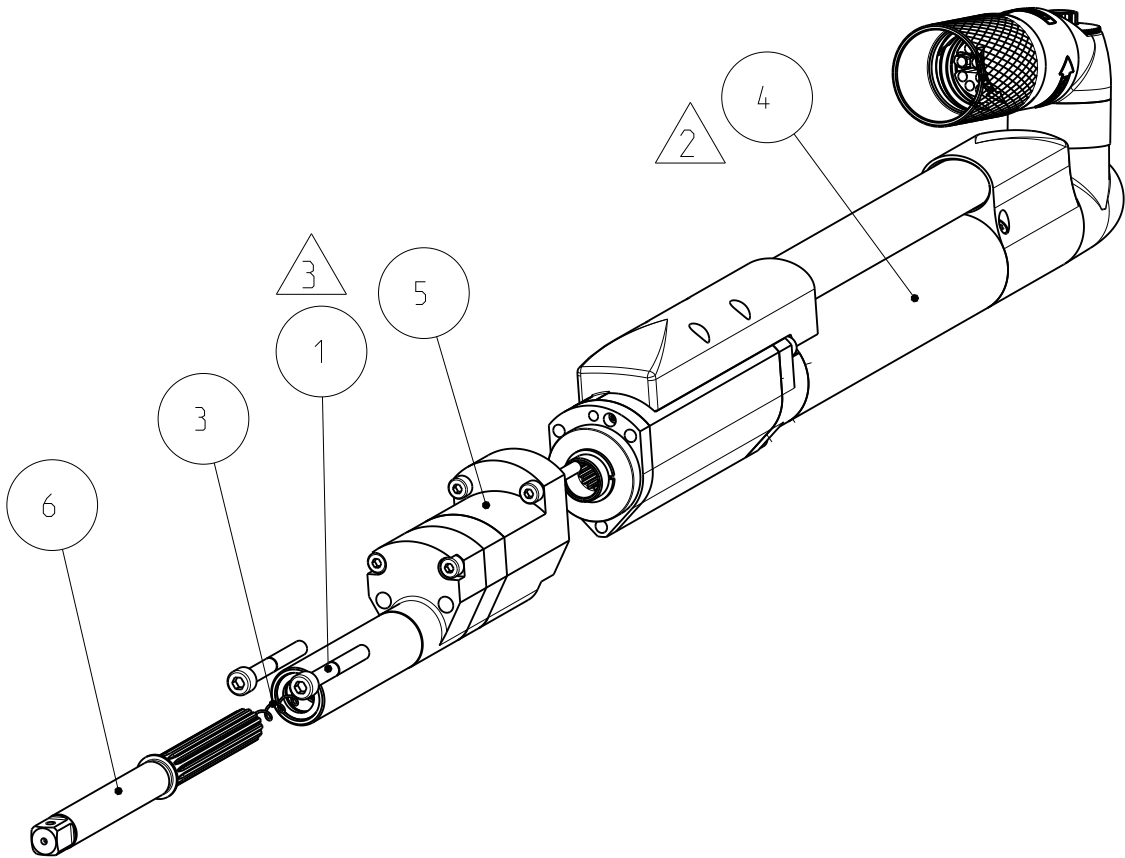

Max torque 20Nm. Max speed 1000 rpm.
Sp=Specially designed part, not available as standard spare part.
FOR GREASE INSTRUCTION SEE PZ 4113.

6	4232 5671 00	1	SOCKET HOLDER	QST34 0: 3/8": ±0: tra.50: hole	Sp
5	4232 5644 80	1	OFFSET GEAR	i=1,000	Sp
4	4230 2891 80	1	QST34-20CT	Max torque 20Nm. Max speed 1000rpm.	
3	4230 2756 00	1	COMPRESSION SPRING	13-19N	SP
2	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
1	0211 1213 00	2	HEX SOCK SCREW	MC6S M5x40 12.9	
Pos	Designation	Number	Name	Comment	Class

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name QST34-20CT0-T50-L150-H10					QST34.		Secrecy class		
Material --					1102 K/-				
-					CAD Pro/E				
 <i>Atlas Copco</i> 		Scale 13:20	Format A3	Family MK2_G	Compare -			Drawing owner	
Drawn TEN			Blank -		Replaces -			T00	
Transferred from -		Cons.class 1295 K/-	Rev 3	Status Released	Designation			Sheet 1 (2)	
		Mass/Volume 2,4 kg	Date 2012-05-24		9831 4086 47				

3	-	Two screws for transportfixation added.	2015-04-24	TEN
Note	Pos.	Modified from	Date	Intr.

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

