
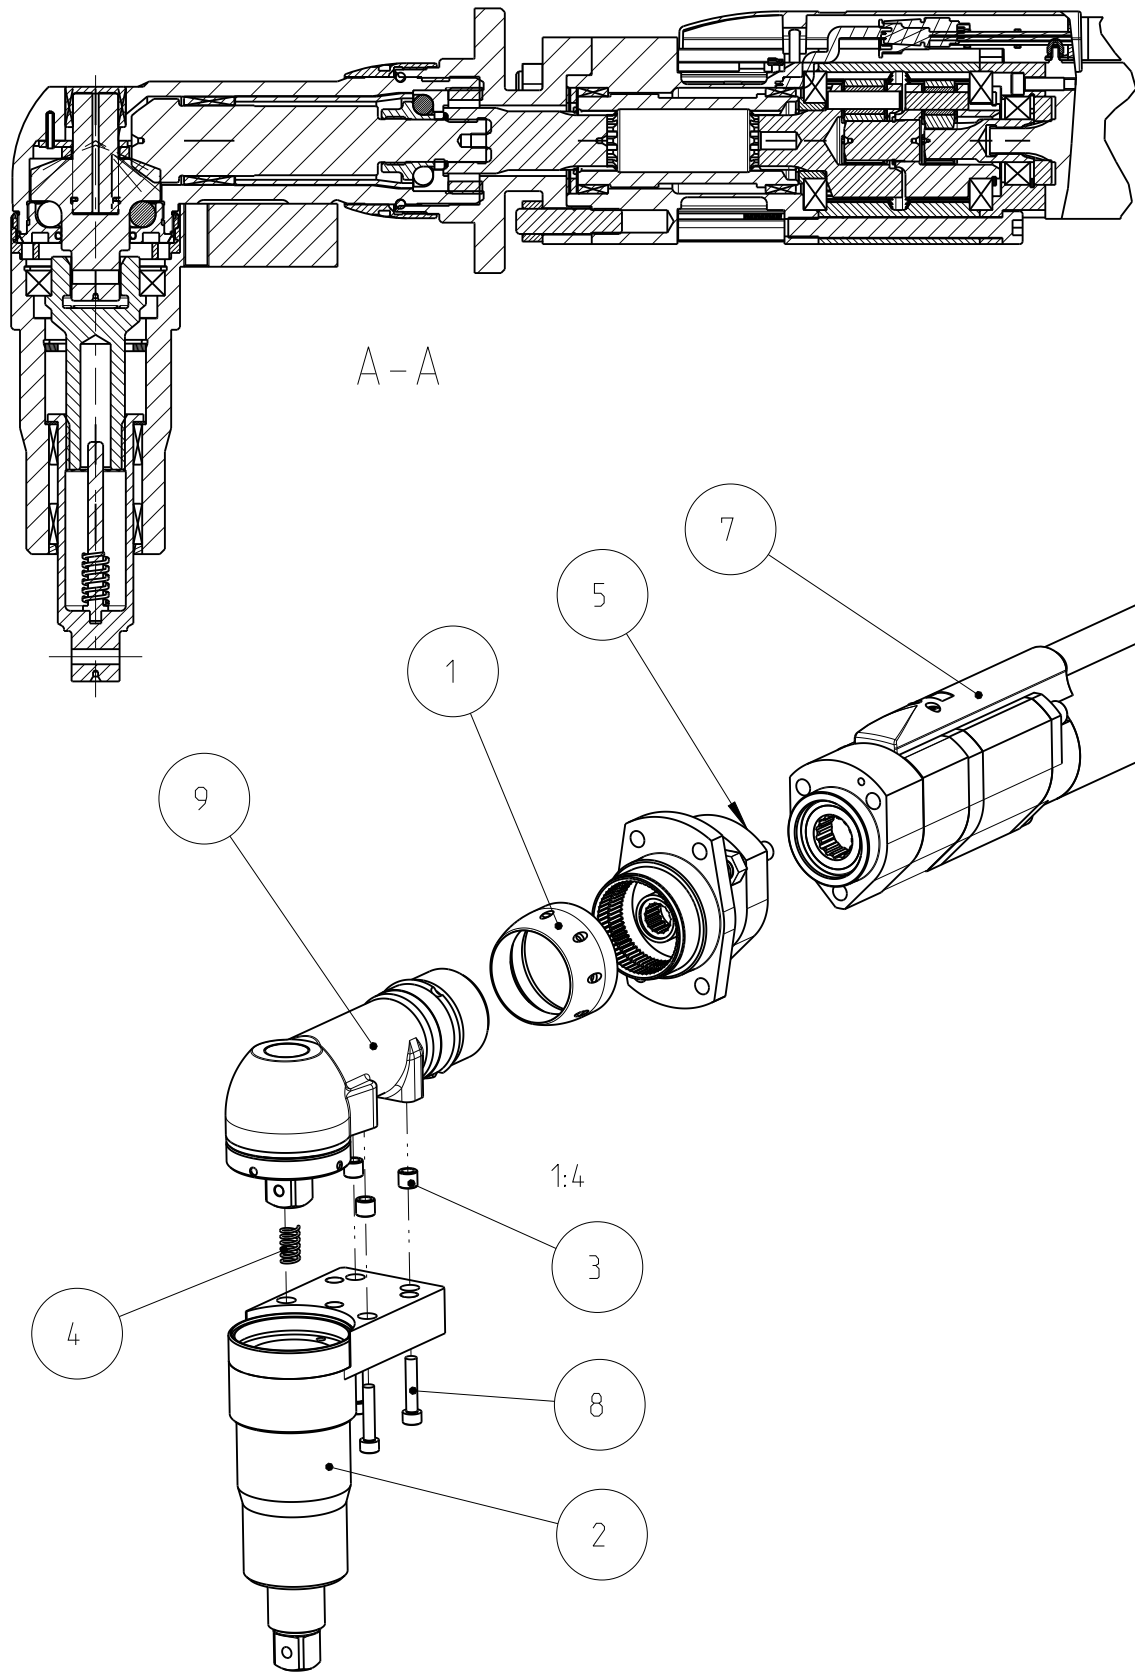


FOR GREASE INSTRUCTION SEE PZ4113

SP= Specially designed part, not available as standard spare part.
COMMENT: Max torque 350 Nm. Max speed 120 rpm.

9	4224 2513 07	1	ANGLE GEAR	u=1,8 (18/10)	
8	0211 1250 00	4	HEX SOCK SCREW	MC6S M6x30 12.9	
7	4230 2898 80	1	QST62-350CT	Max torque 350Nm. Max speed 220 rpm.	
6	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
5	4230 2347 80	1	ADAPTER	ETV S9	
4	4232 3052 00	1	SPRING	-	SP
3	4231 2421 00	4	GUIDE	-	SP
2	4232 3482 80	1	EXTENDED SPINDLE	-	SP
1	4220 3448 00	1	CAP NUT	-	
Pos	Designation	Number	Name	Comment	Class


Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name QST62-350CTV-T25-H19				Secrecy class -	
Material -				1102 K/-	
-				CAD Pro/E	
Scale 1:3		Format A3	Family MK2	Compare -	Drawing owner
Drawn KKM		Blank -		Replaces -	T00
Cons.class 1295 K/-		Rev 3	Status Released	Designation 9831 4087 10	
Transferred from -		Mass/Volume 16.5 kg		Date 2008-09-25	

3	B3	Added dimensions.	2020-02-21	MiK
Note	Pos.	Modified from	Date	Intr.

Model name	9831408710	Rev. Ver.	3.1
Drawing name	9831408710	Rev. Ver.	3.1

This document and its content is the intellectual property of Atlas Copco Industrial Technique AB and shall not be used, altered, copied or distributed.

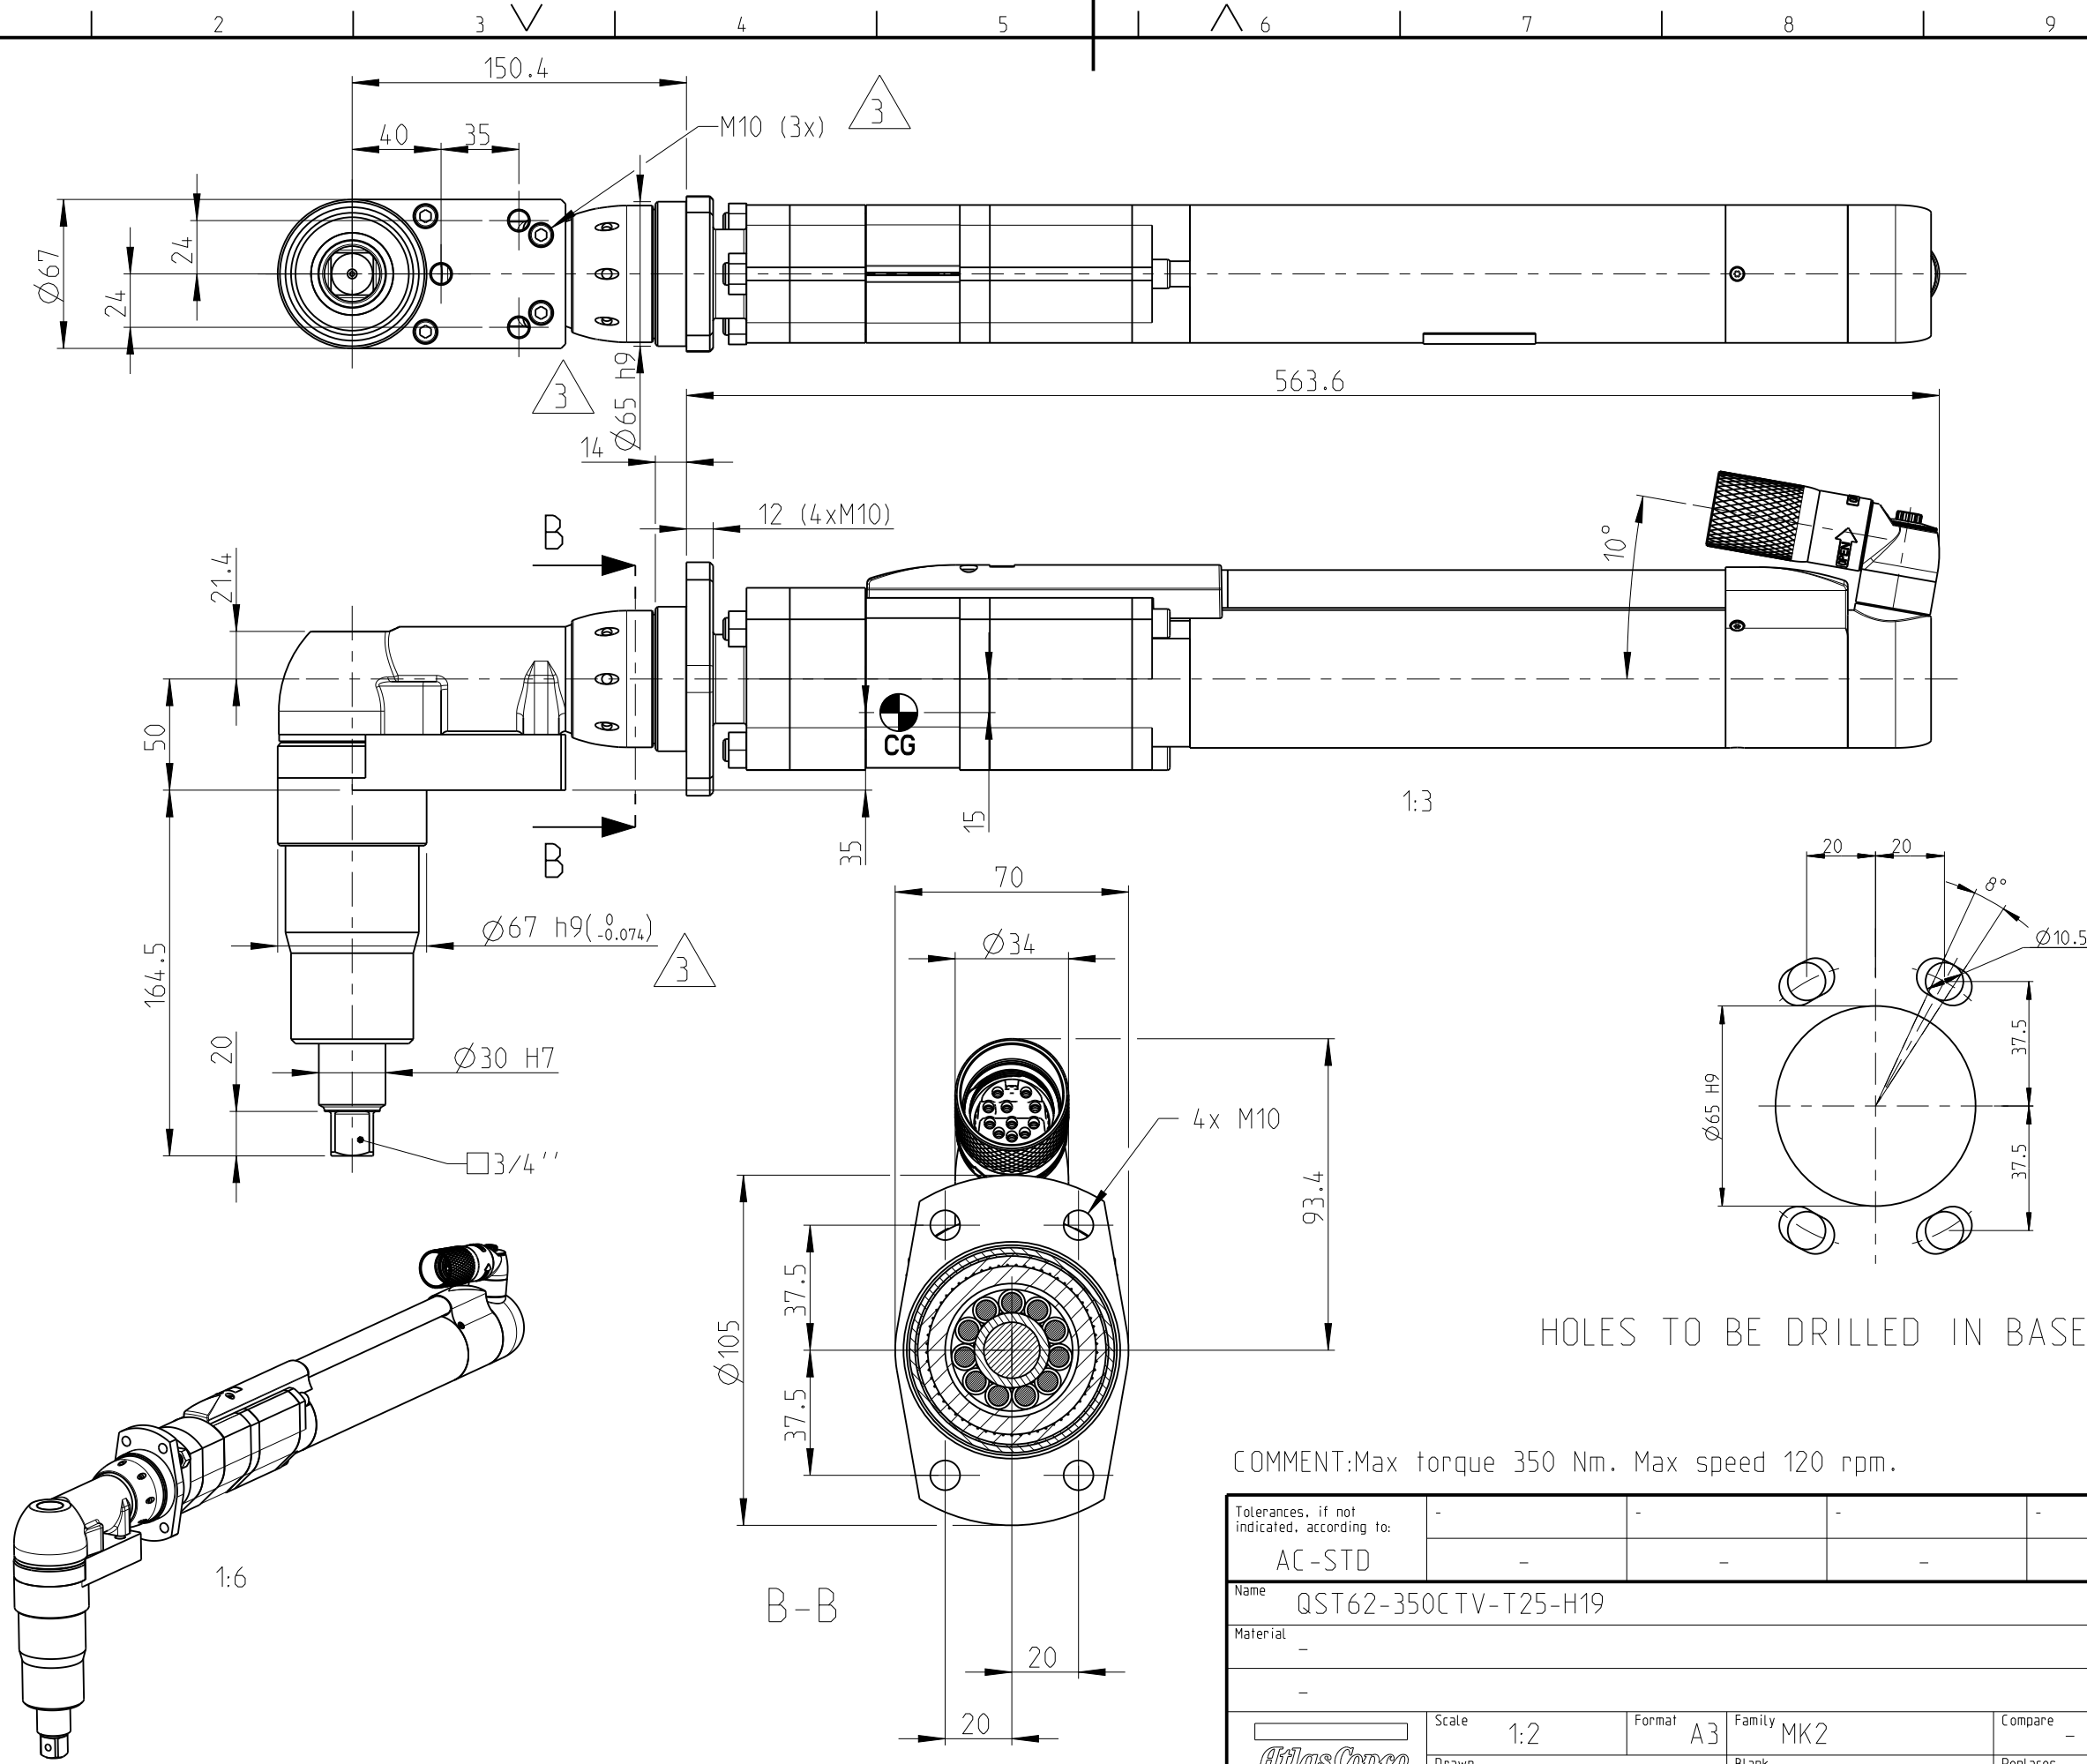

HOLES TO BE DRILLED IN BASE PLATE

COMMENT:Max torque 350 Nm. Max speed 120 rpm.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST62-350CTV-T25-H19					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
		Scale 1:2	Format A3	Family MK2	Compare -	Drawing owner TOO
		Drawn KKM	Blank -	Replaces -	-	
Transferred from -		Cons.class 1295 K/-	Rev 3	Status Released	Designation	Sheet 2 (2)
		Mass/Volume 16.5 kg	Date 2008-09-25	9831 4087 10		

3	B3	Added dimensions.	2020-02-21	MiK
Note	Pos.	Modified from	Date	Intr.