
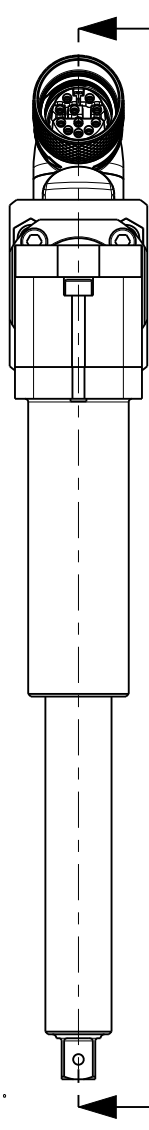


This document and its content is the intellectual property of Atlas Copco Industrial Technique AB. Any use, including but not limited to reproduction, distribution, publication, modification and copying without prior written authorization is strictly prohibited.

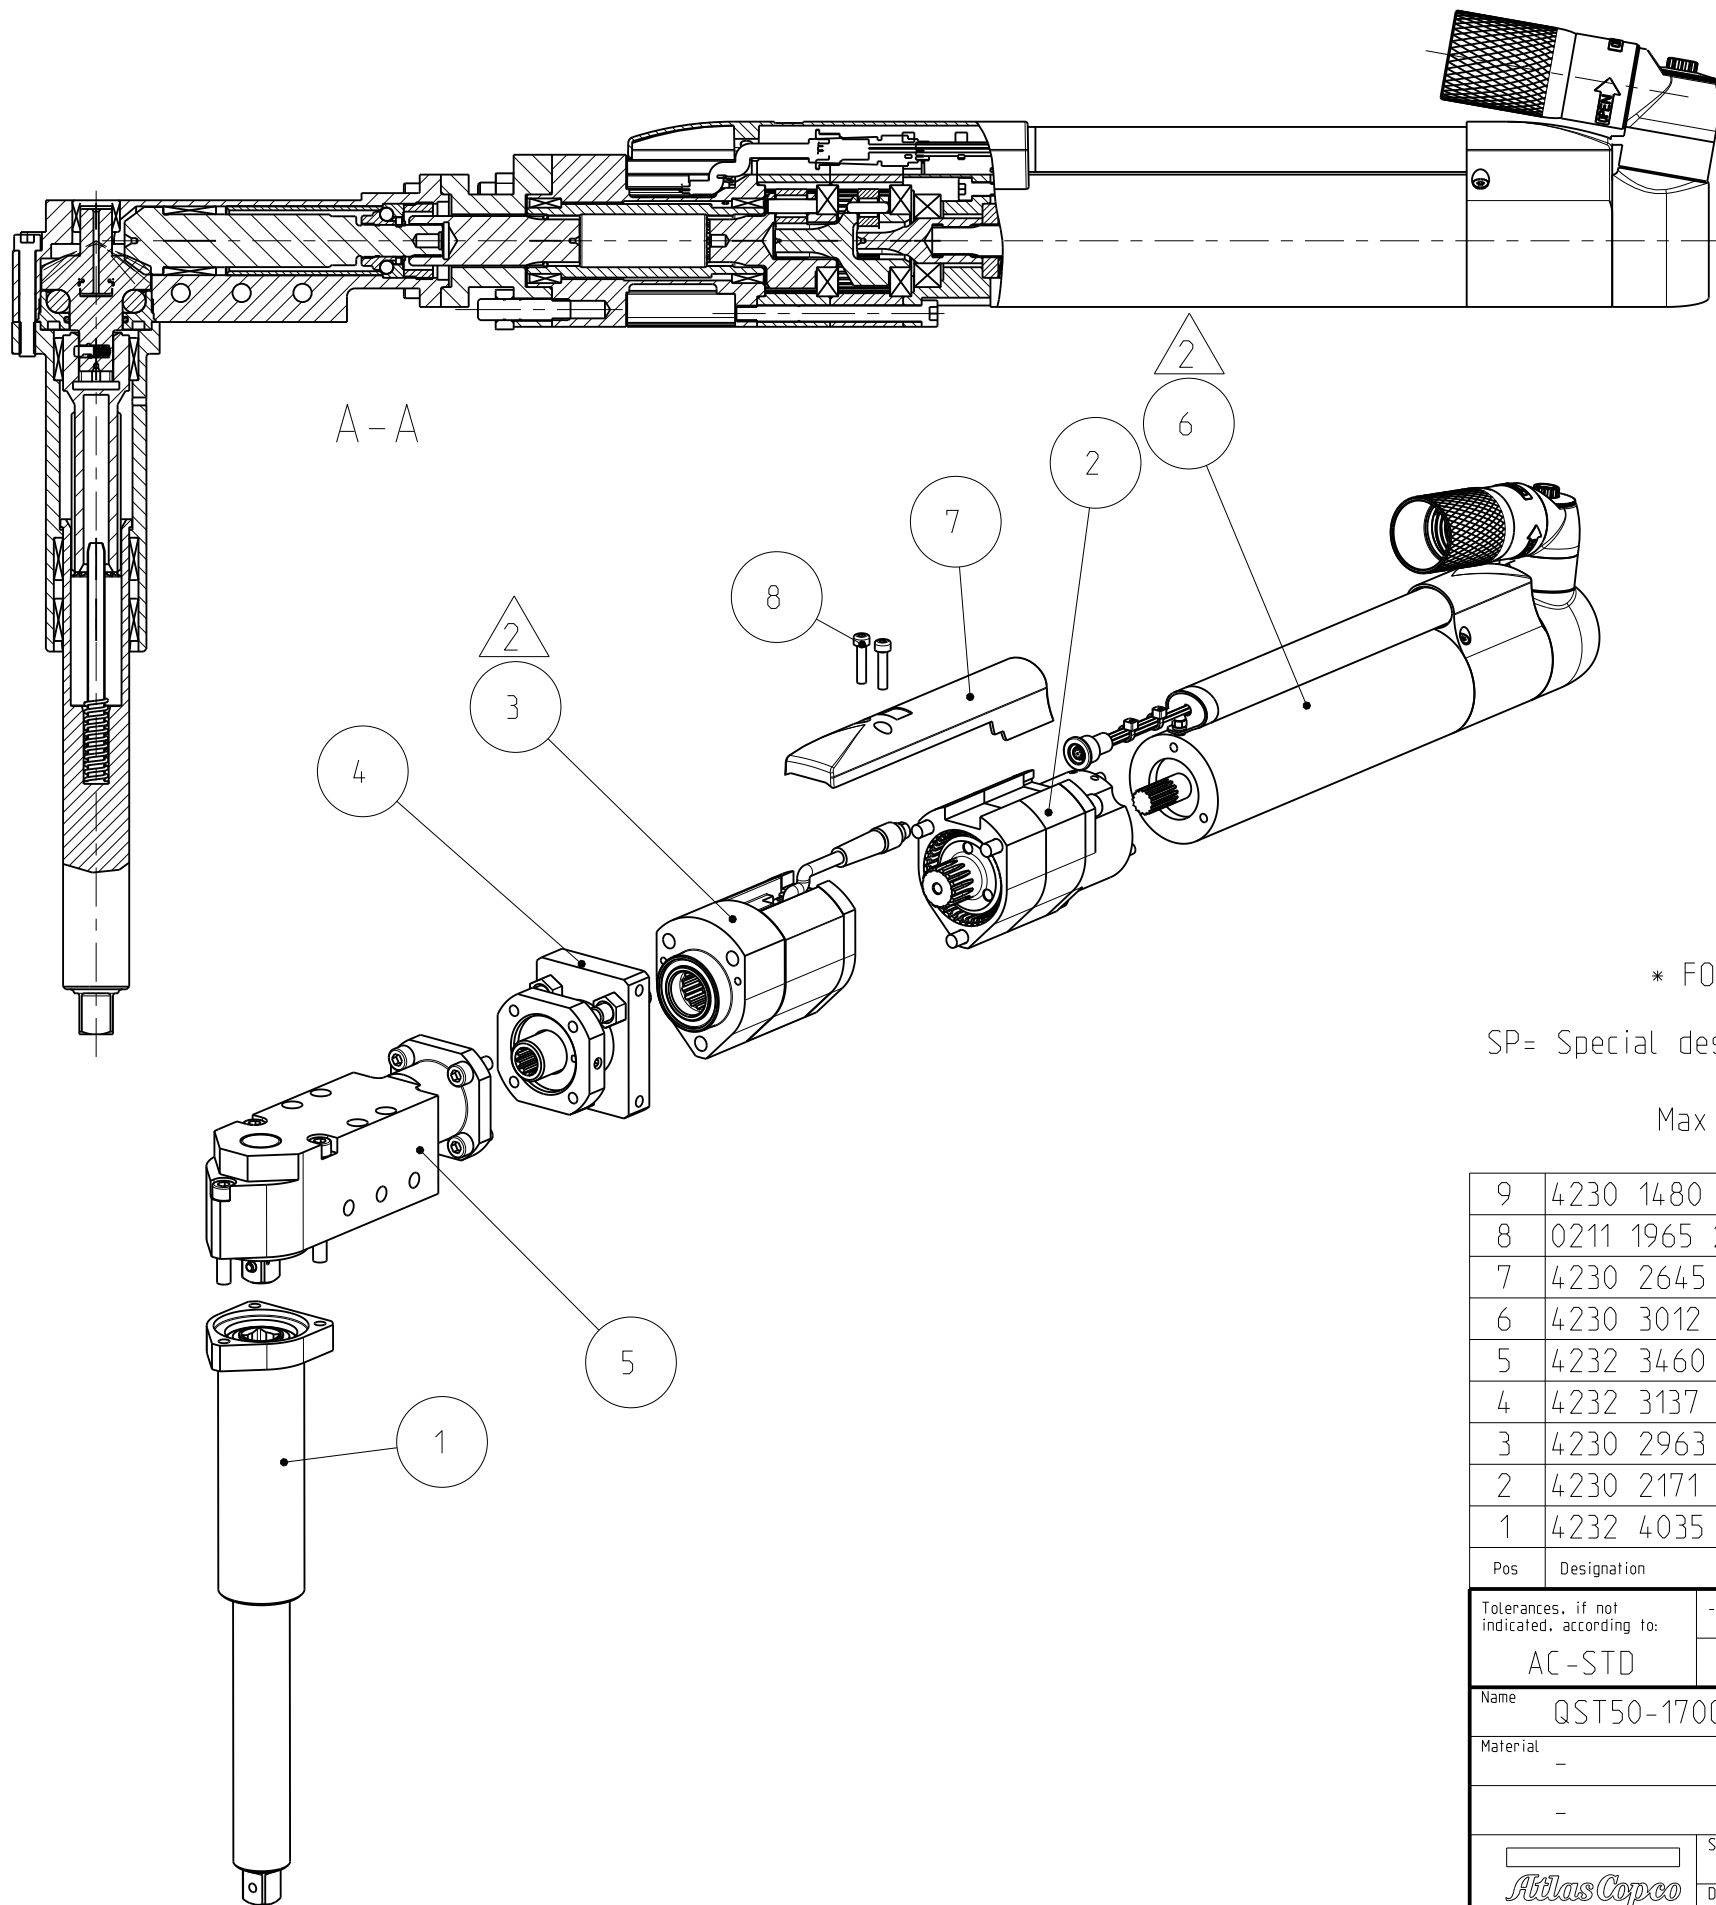

* FOR GREASE INSTRUCTION SEE PZ4113
SP= Special designed part, not available as standard spare part.
Max torque 170 Nm. Max speed 210 rpm.

9	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
8	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9	
7	4230 2645 10	1	CABLE RAIL	QST 50	
6	4230 3012 80	1	MOTOR	QST 50	
5	4232 3460 80	1	ANGLE GEAR QMX50 RTV	-	SP
4	4232 3137 80	1	ADAPTER	-	SP
3	4230 2963 80	1	TRANSDUCER SET	QDT50-100	
2	4230 2171 81	1	GEAR UNIT	ETX50 '50': i=((41/8)+1)*((41/10)+1))~31.24	
1	4232 4035 80	1	FRONT PART	-	
Pos	Designation	Number	Name	Comment	Class

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST50-170CTV-T50-H13				QST		Secrecy class
Material -				1102 K/-		
-				CAD Pro/E		
		Scale 7:20	Format A3	Family MK2	Compare -	Drawing owner
Drawn toohon		Blank -		Replaces -		T00
Transferred from -		Cons.class 1295 K/-	Rev 2	Status Released	Designation	Sheet 1 (2)
		Mass/Volume 8.9 kg	Date 2009-04-22	9831 4091 01		

2	B5 C3	New connector: Motor & Transducer replaced = MK2.	2020-02-27	HPN
Note	Pos.	Modified from	Date	Intr.

9831409101

This document and its content is the intellectual property of Atlas Copco Industrial Technique AB.

