



Model name	9831409421	Rev.Ver	0.1
Drawing name	9831409421	Rev.Ver	0.2

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

0	-	-	-	-
Note	Pos.	Modified from	Date	Intr.

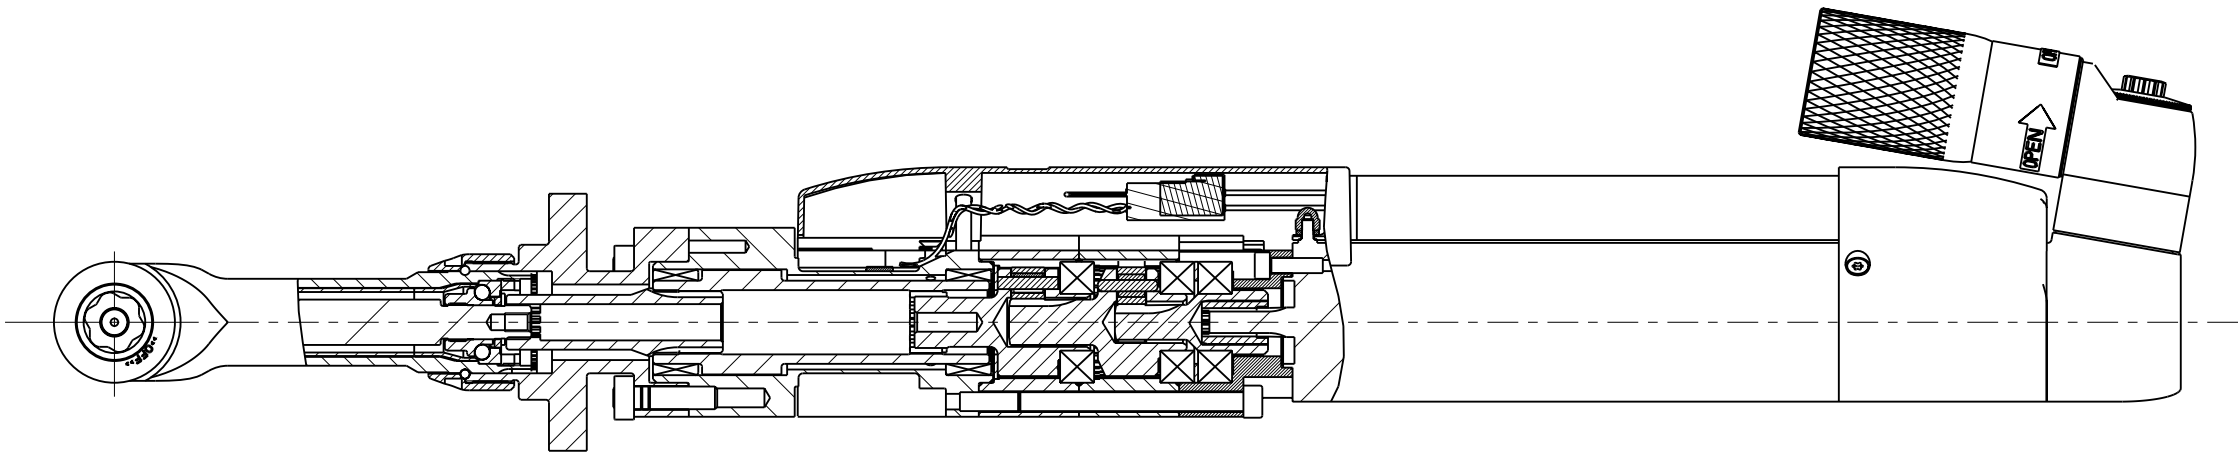


A-A

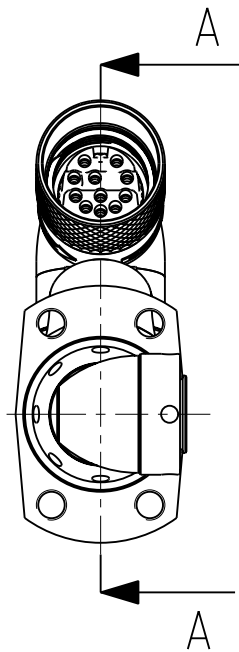

A

A

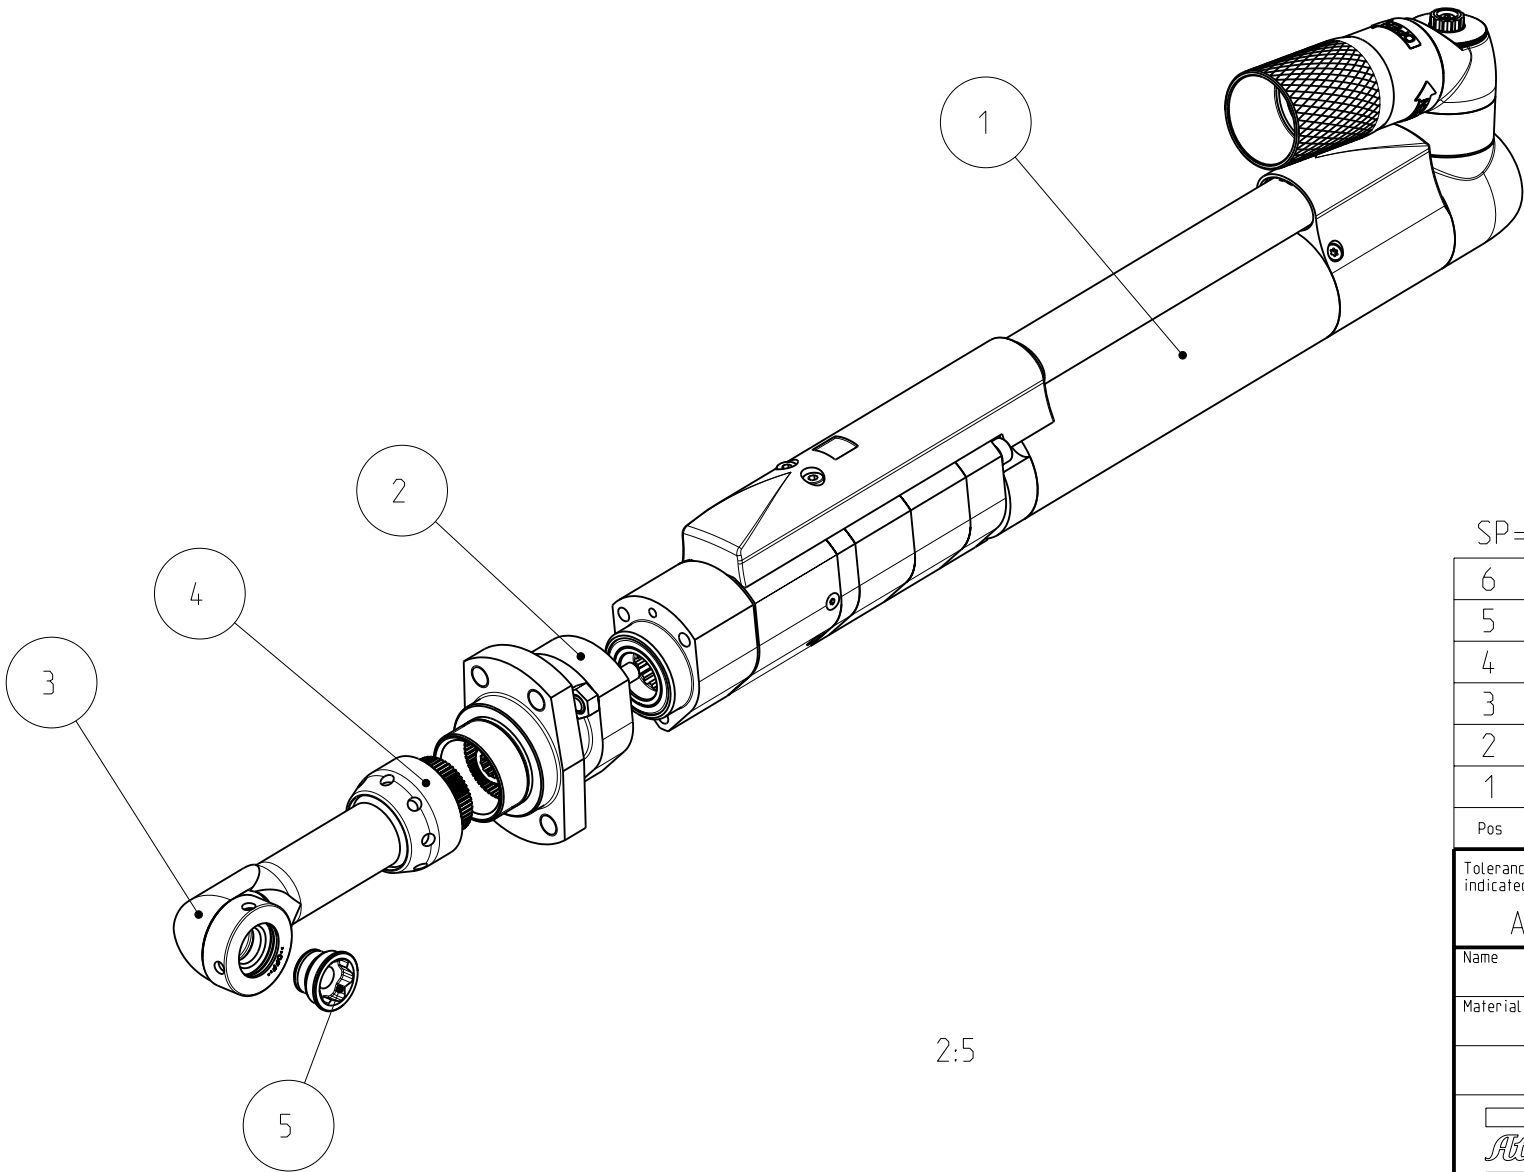

2:5

* For grease instruction, see PZ4113.


Comment: Max torque 30 Nm. Max speed 440 rpm.

SP= Specially design part, not available as standard spare part.


6	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
5	4220 3882 13	1	SLEEVE SURFACE	Ordering number: 4220 3882 93	
4	4220 0841 00	1	CAP NUT	-	
3	4232 4807 80	1	ANGLE GEAR 35 FS	-	SP
2	4232 1568 80	1	CLAMP	-	SP
1	4230 2893 80	1	QST42-50CT	Max torque 50Nm. Max speed 700 rpm.	
Pos	Designation	Number	Name	Comment	Class
Tolerances, if not indicated, according to:		-	-	-	-
AC-STD		-	-	-	-
Name QST42-30CTVFS				Secrecy class -	
Material -				1102 K/-	
-				CAD Pro/E	
		Scale 1:2	Format A3	Family -	Compare -
		Drawn T Sjöblom	Blank -	Replaces -	Drawing owner
		Cons.class 1295 K/-	Rev 0	Status RELEASED	Designation
Transferred from -		Mass/Volume 4.2 kg	Date 2010-12-13	Sheet 1 (2)	
		9831 4094 21			

Drawing nar

0	-	-	-	-
Note	Pos.	Modified from	Date	Intr.

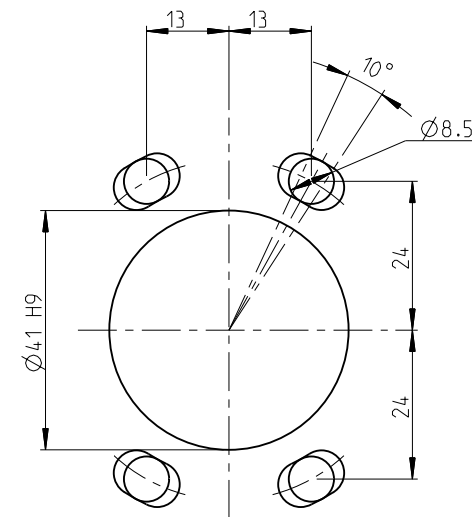

HOLES TO BE DRILLED IN BASE PLATE

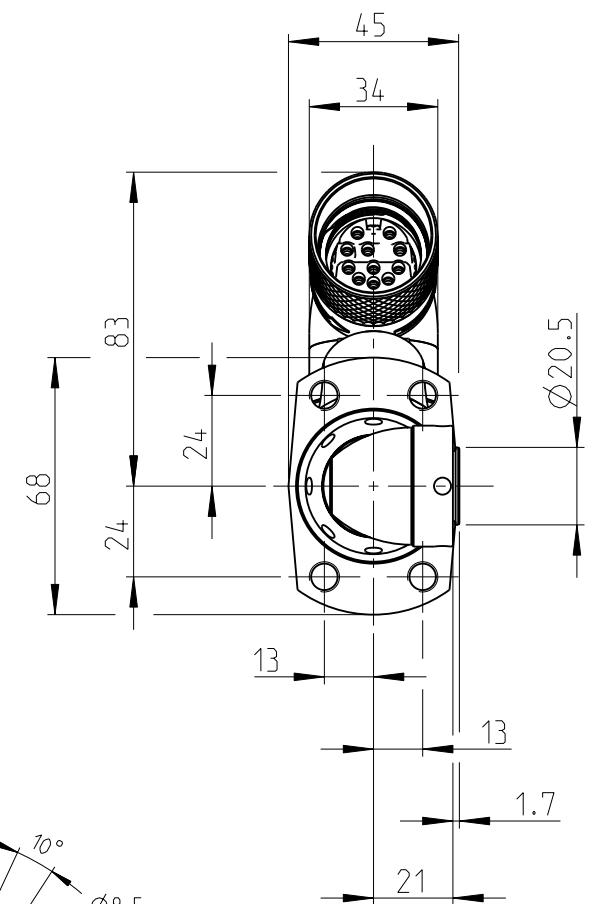

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST42-30CTVFS					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
<i>Atlas Copco</i>	Scale 1:2	Format A3	Family -	Compare -	Drawing owner	
	Drawn T Sjöblom		Blank -	Replaces -	TOO	
Transferred from -	Cons.class 1295 K/-	Rev 0	Status RELEASED	Designation		Sheet 2 (2)
	Mass/Volume 4.2 kg	Date 2010-12-13	9831 4094 21			