


Model name	Rev.Ver
9831410467	0.1
Drawing name	Rev.Ver
9831410467	0.1

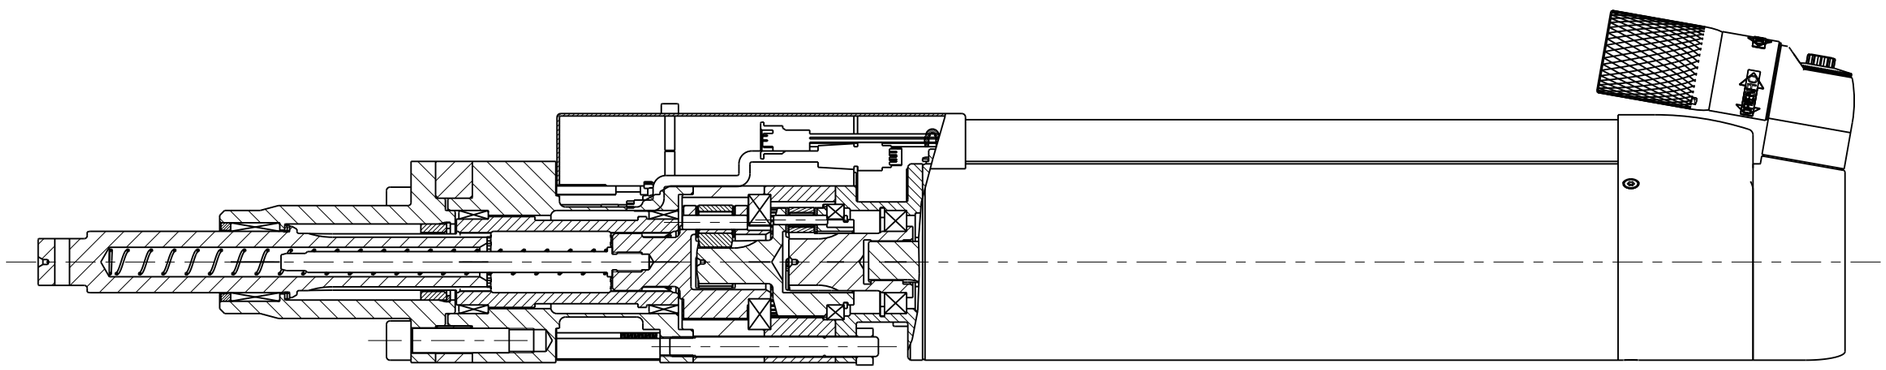

A-A

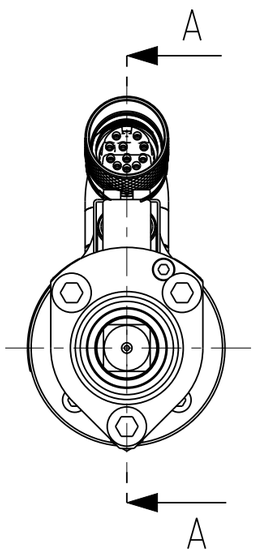

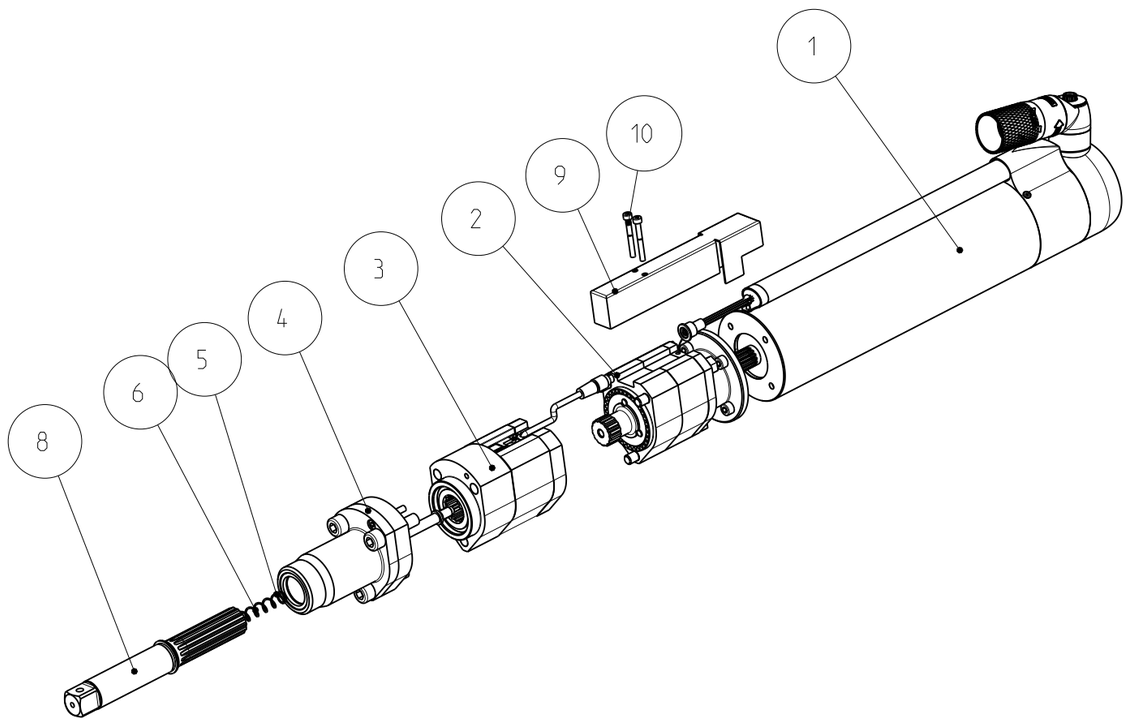

1:5

Connector damping Kuntze 503.1506 or similar mounted in cable rail
* For grease instructions see PZ 4113.
Max torque 320 Nm. Max speed 400 rpm.
SP=Special designed part, not available as standard spare part.

Pos	Designation	Number	Name	Comment	Class
10	0211 1178 00	2	HEX SOCK SCREW	MC6S M4x35 12.9	
9	4232 7499 00	1	CABLE RAIL	-	SP
8	4230 1822 00	1	SOCKET HOLDER	QMX62: 3/4" 0mm 50mm travel QM62 thru hole.	
7	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
6	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N	
5	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N	
4	4230 1602 83	1	FRONT PART	QMX62	
3	4232 6115 80	1	TRANSDUCER SET	QDT62-200	SP
2	4232 0590 80	1	GEAR UNIT	QMX62: I=14.64=(((47/22)+1)((33/9)+1)	
1	4230 3014 80	1	MOTOR	QST80/90	

Tolerances, if not indicated, according to:					
AC-STD	-	-	-	-	-

Name		Secrecy class
QST80-320CT-T50-L152-H19	-	1102 K/-
Material		CAD
-		Pro/E


Scale	Format	Family	Compare	Drawing owner
2:5	A3	MK2	-	T00
Drawn		Blank	Replaces	
B Nilsson		-	-	
Cons.class	Rev	Status	Designation	Sheet 1 (2)
1295 K/-	0	Released	9831 4104 67	
Mass/Volume		Date		
14.7 kg		2016-05-17		


Transferred from
-


Note	Pos.	Modified from	Date	Intr.
0	-	-	-	-


This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

Model name	Rev.Ver
9831410467	0.1
Drawing name	**Rev.Ver**
9831410467	0.1

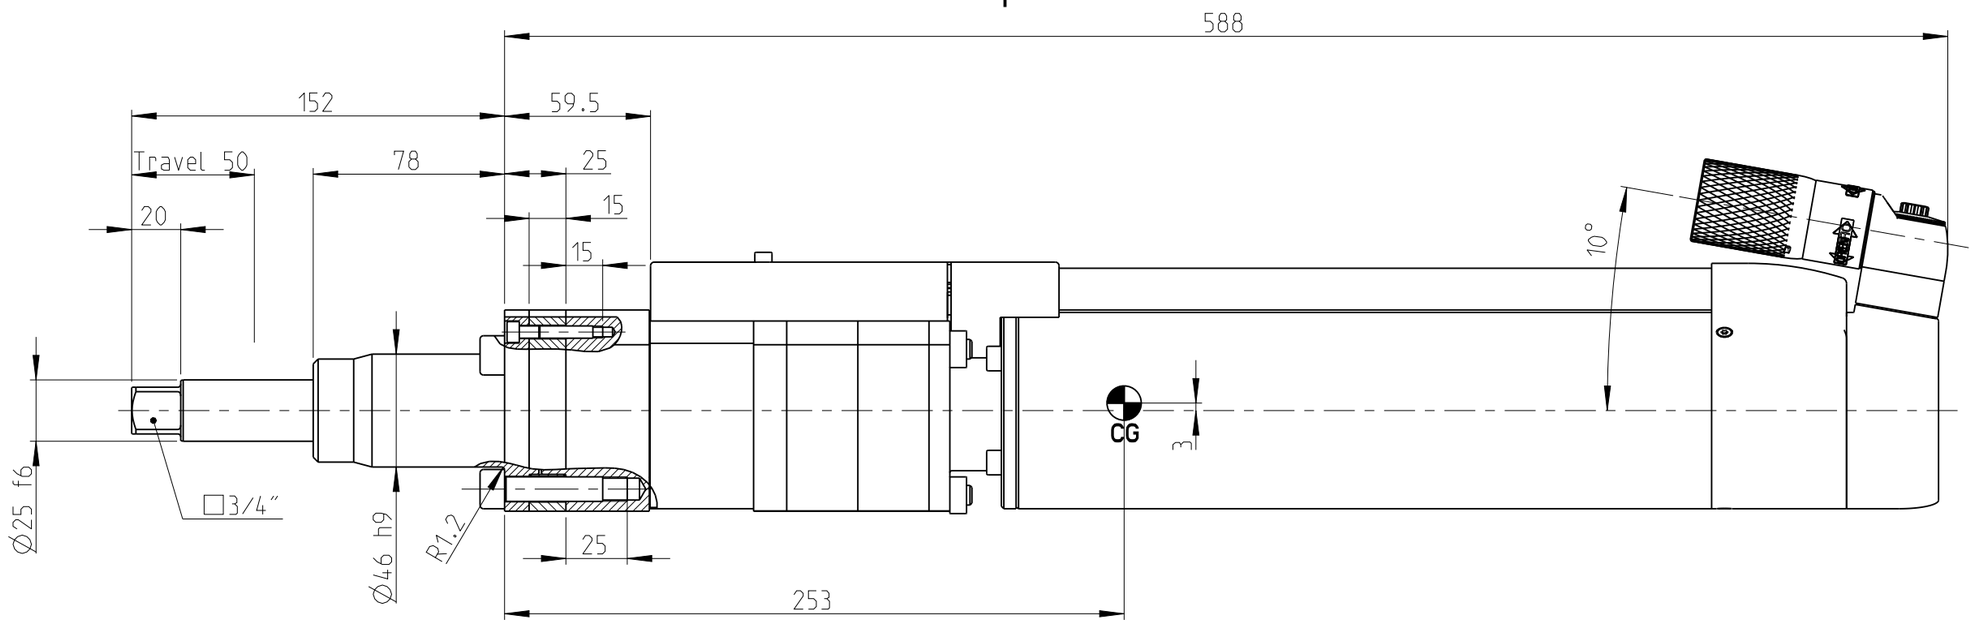


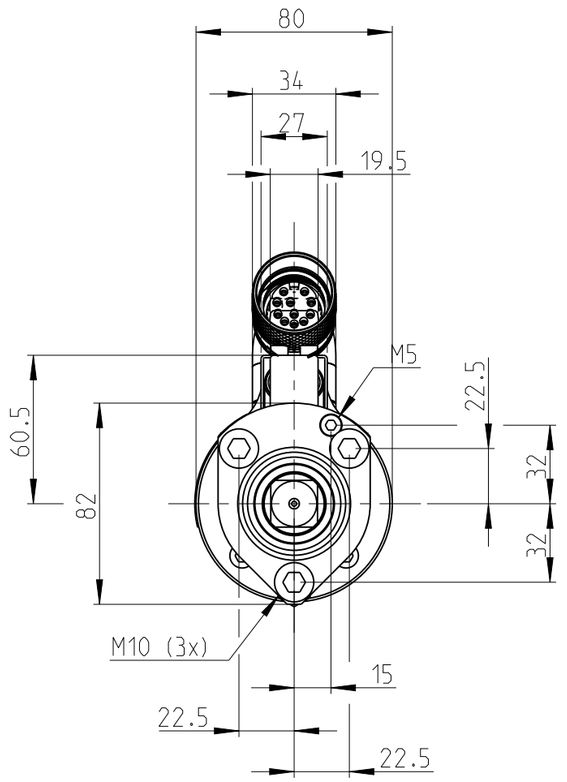

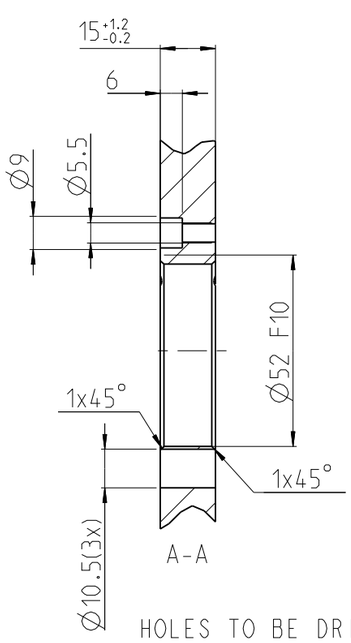

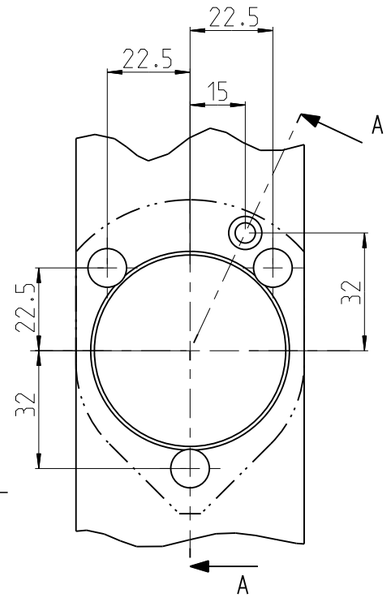

HOLES TO BE DRILLED IN BASE PLATE
FOR OUTSIDE FITTED FRONT PART.

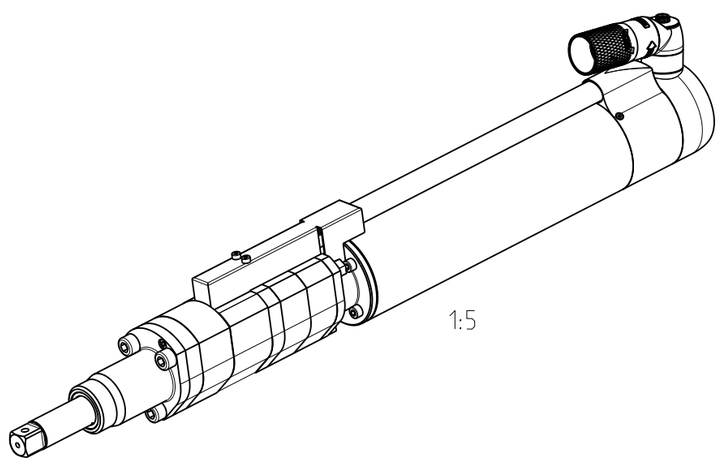

Note	Pos.	Modified from	Date	Intr.
0	-	-	-	-

Tolerances, if not indicated, according to: AC-STD	-	-	-	-	-
	-	-	-	-	-

Name QST80-320CT-T50-L152-H19 –
Material –
–
Secrecy class 1102 K/-
CAD Pro/E

Atlas Copco

Transferred from –

Scale 2:5	Format A3	Family MK2	Compare –	Drawing owner T00
Drawn B Nilsson		Blank –	Replaces –	
Cons.class 1295 K/-	Rev 0	Status Released	Designation 9831 4104 67	Sheet 2 (2)
Mass/Volume 14.7 kg		Date 2016-05-17		

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.