Reaction bar

Printed Matter No.9839 0542 00
Publication Date 2024-12-18

Valid from Serial No. -

Instruction Supplement

S-type (1300 Nm)	4210 4480 70
S-type (2400 Nm)	4210 4480 74
S-type (4500 Nm)	4210 4480 75
S-type (4500 Nm)	4210 4480 76
S-type (8100 Nm)	4210 4480 77
S-type (4100 Nm)	4210 4480 85
S-type (1300 Nm)	4210 4480 90
S-type (8100 Nm)	4210 4480 92
S-type (4100 Nm)	4210 4480 93
S-type (2600 Nm)	4210 4480 94
S-type (2400 Nm)	4210 4481 74





⚠ WARNING

To reduce risk of injury, everyone using, installing, repairing, maintaining, changing accessories on, or working near this tool MUST read and understand these instructions before performing any such task.

DO NOT DISCARD - GIVE TO USER

Atlas Copco

Table of Contents


EN Instruction Supplement 3
DA Vejledningstillæg 7

© Atlas Copco Industrial Technique AB - 9839 0542 00

Instruction Supplement

Installing the reaction bar

1. Attach the reaction bar to the tool and insert the retaining ring into the groove to hold the reaction bar in place.
2. Attach the socket to the square drive. Make sure to insert the locking pin through the socket and square drive according to the illustration.

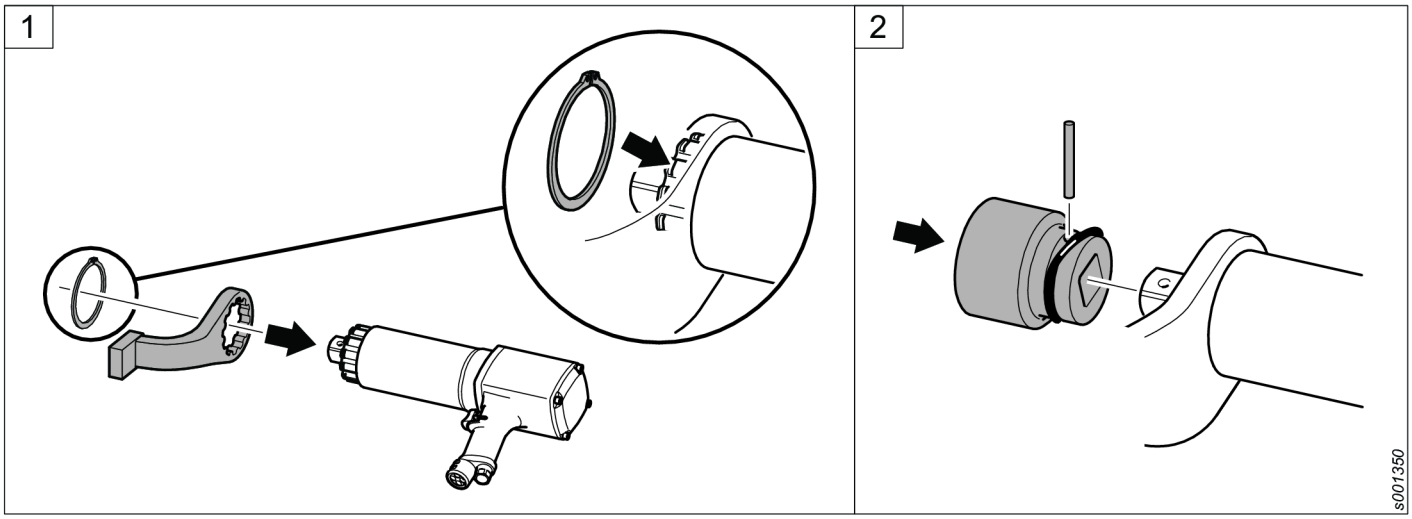

Operating the tool with reaction bar


1. Attach the tool to the application.
2. ⚠ **WARNING Be aware that the reaction bar will turn in the opposite direction to the tool.**

   By using the reverse lever, the tool can be operated in both clockwise and counter-clockwise directions.
3. Make sure the tool is placed in the correct position on the work surface as described in the picture. The end surface of the reaction bar and the socket/nut must be aligned. Make sure that the foot of the reaction bar hits the center of the nut that takes the reaction force.
4. ⚠ **WARNING Never put your hand on or close to the reaction bar while the tool is being used.**


   Press the push button to start the tool.
5. Continue pressing the push button while running down the nut. With pneumatic tools you can hear a sound, while the tool is running the nut down. When the sound decreases, release the push button to stop the tool. With electric tools the run down of the nut is controlled by the Power Focus.

© Atlas Copco Industrial Technique AB - 9839 0542 00


1

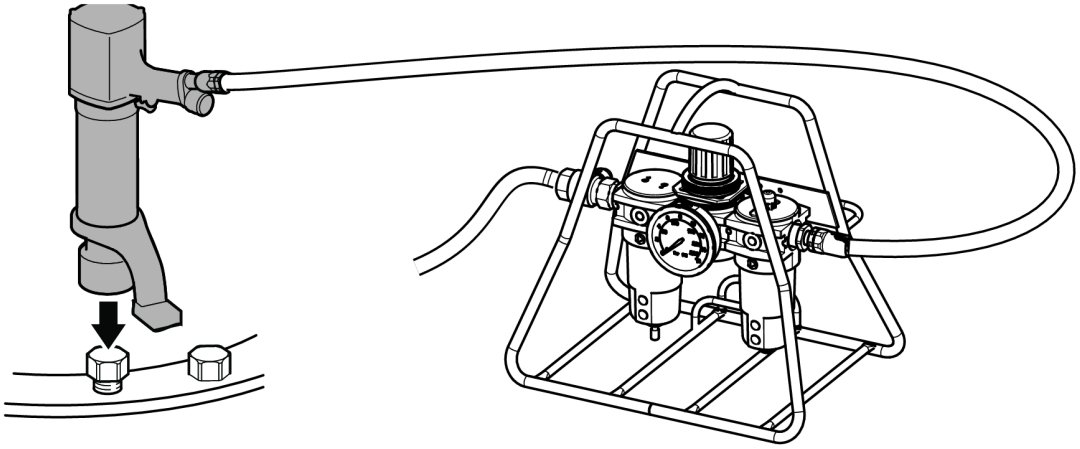


2

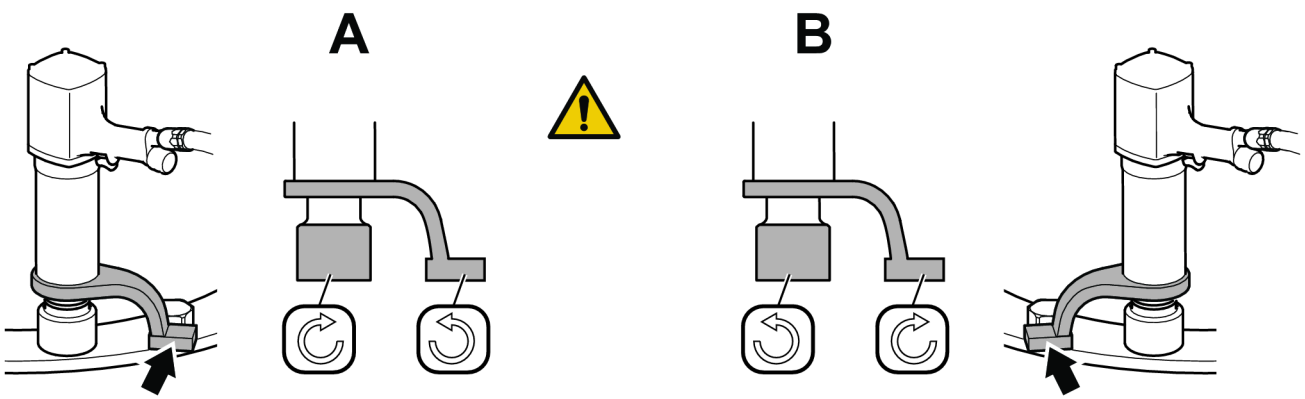

3

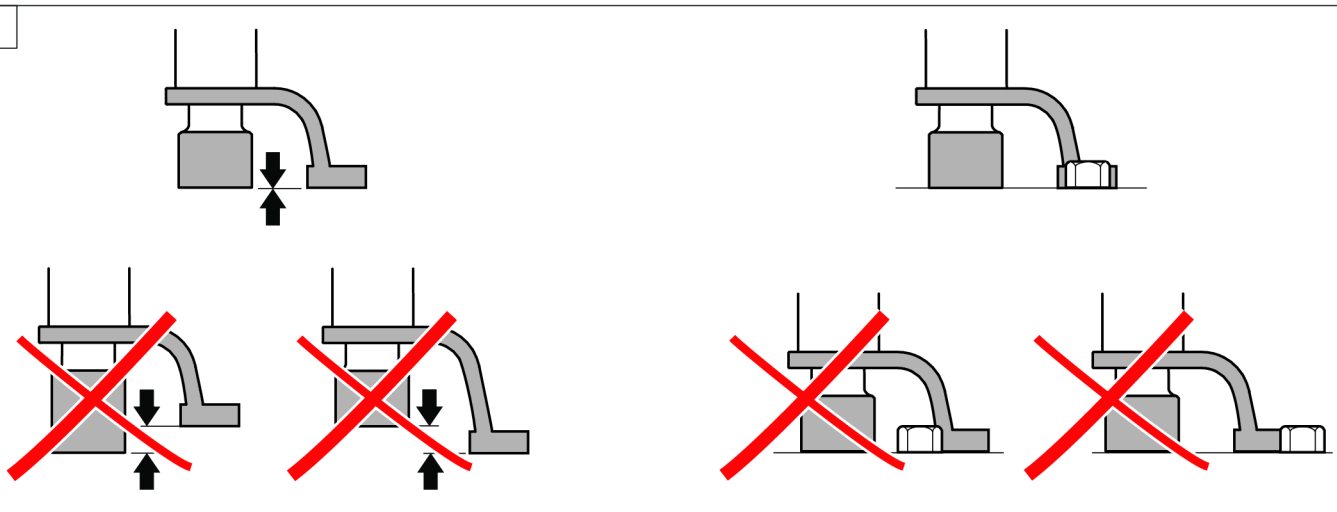


© Atlas Copco Industrial Technique AB - 9839 0542 00

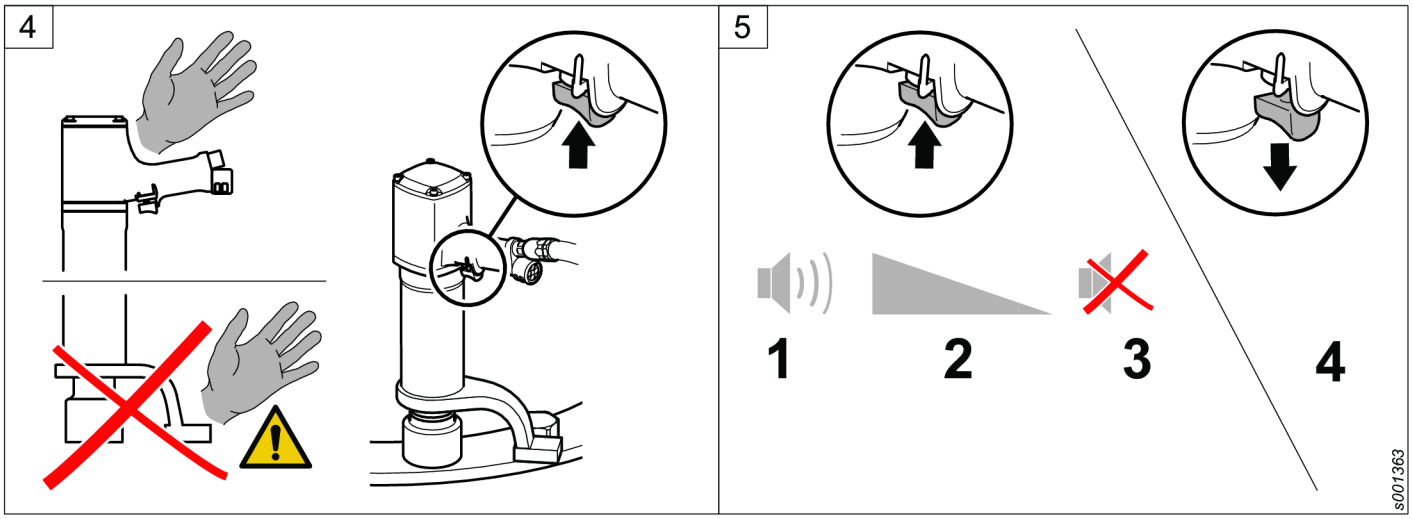

Maintenance


If the reaction bar is used daily, do a visual inspection every day of the sensitive areas, for example near the center hole and at the thinnest parts of the reaction bar.

⚠ **WARNING Always replace cracked or damaged reaction bars.**

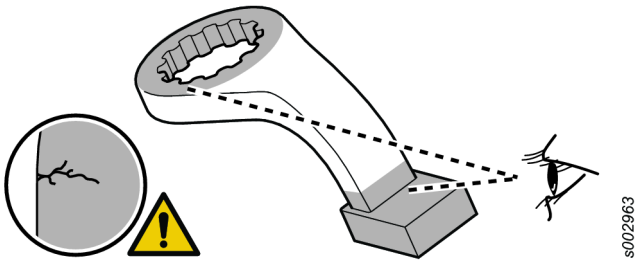

© Atlas Copco Industrial Technique AB - 9839 0542 00

When waved washer is included, make sure to assembly in correct order

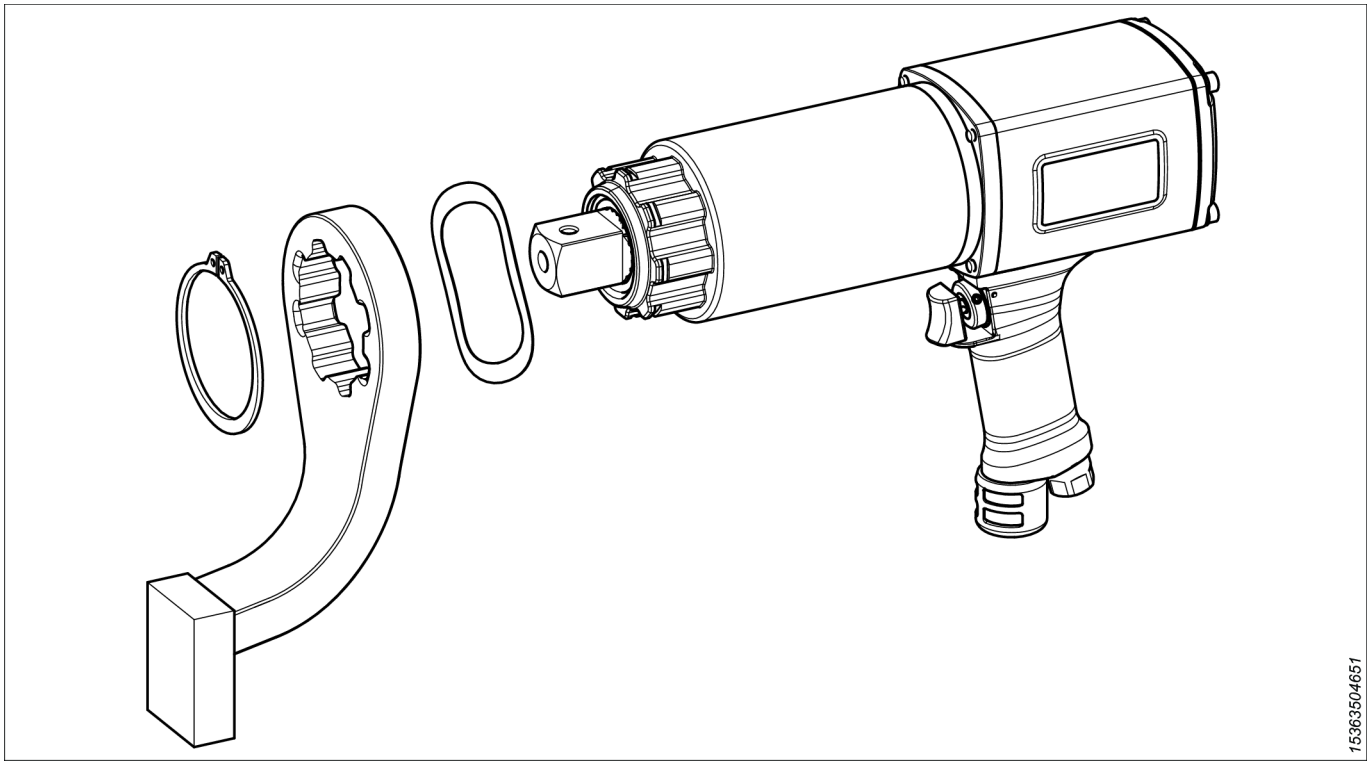


© Atlas Copco Industrial Technique AB - 9839 0542 00

Vejledningstillæg

Montering af reaktionsstang

1. Sæt reaktionsstangen på værktøjet, og sæt sikringsringen i rillen for at holde reaktionsstangen på plads.
2. Sæt topnøglehovedet på det kvadratiske drev. Sørg for at føre låsepinden igennem topnøglehovedet og det kvadratiske drev som vist på illustrationen.

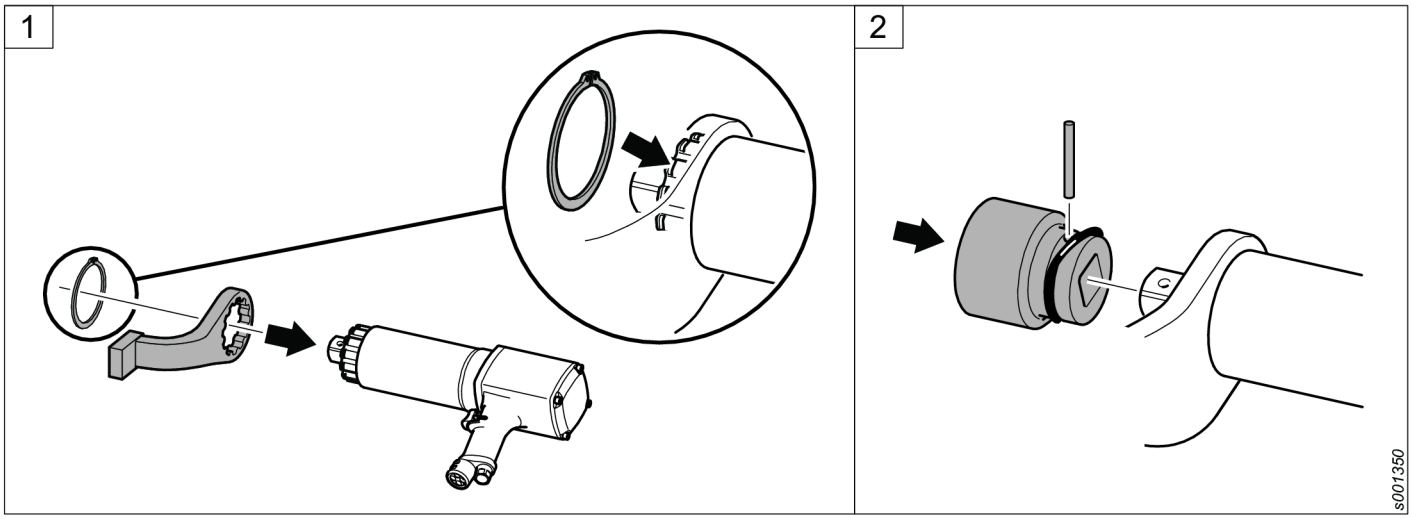


Betjening af værktøjet med reaktionsstang


1. Sæt værktøjet på anvendelsen.
2. ⚠ **ADVARSEL Vær opmærksom på, at reaktionsstangen vil dreje i modsat retning af værktøjet.**


   Brug omstyringshåndtaget til at betjene værktøjet i både medurs og modurs retning.
3. Sørg for, at værktøjet er anbragt i den rette position på arbejdsfladen som vist på billedet. Reaktionsstangens endeflade og top/møtrik skal være rettet ind efter hinanden. Sørg for, at reaktionsstangens fod rammer midten af møtrikken, der optager reaktionskraften.
4. ⚠ **ADVARSEL Hold aldrig hånden på eller i nærheden af reaktionsstangen, mens værktøjet er aktiveret.**


   Tryk på knappen for at starte værktøjet.
5. Fortsæt med at trykke på trykknappen, mens møtrikken skrues til. Med trykluftværktøjer kan du høre en lyd, mens værktøjet skruer møtrikken til. Når lyden mindskes, slippes trykknappen for at stoppe værktøjet. Med elektriske værktøjer styres tilskruningen af møtrikken med Power Focus.

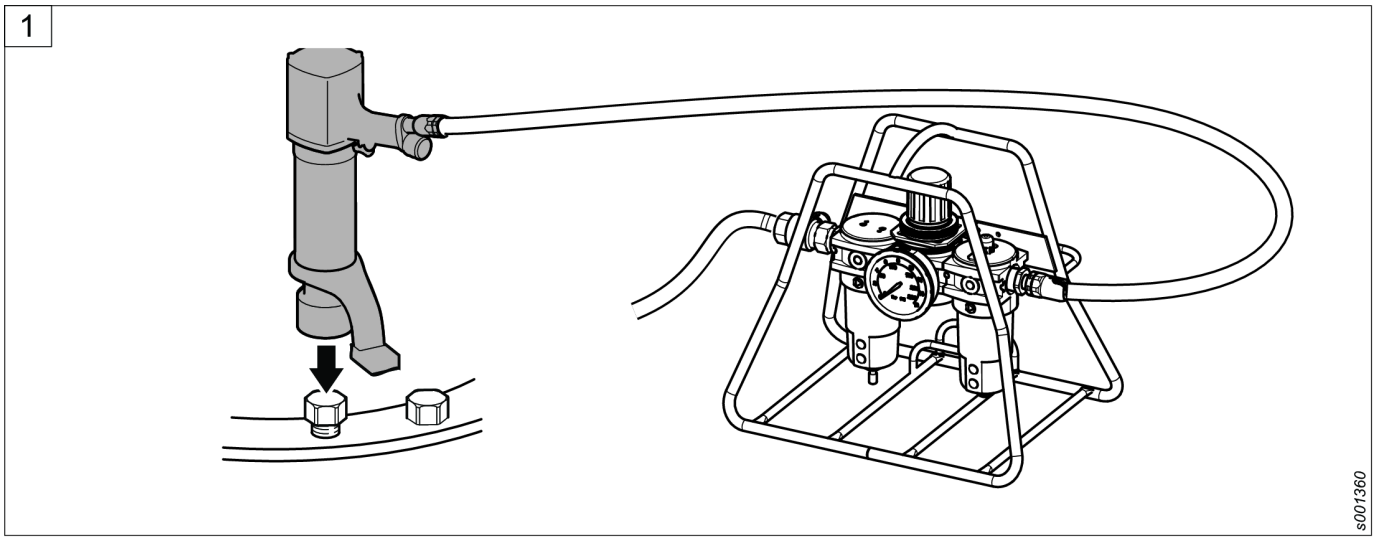

© Atlas Copco Industrial Technique AB - 9839 0542 00

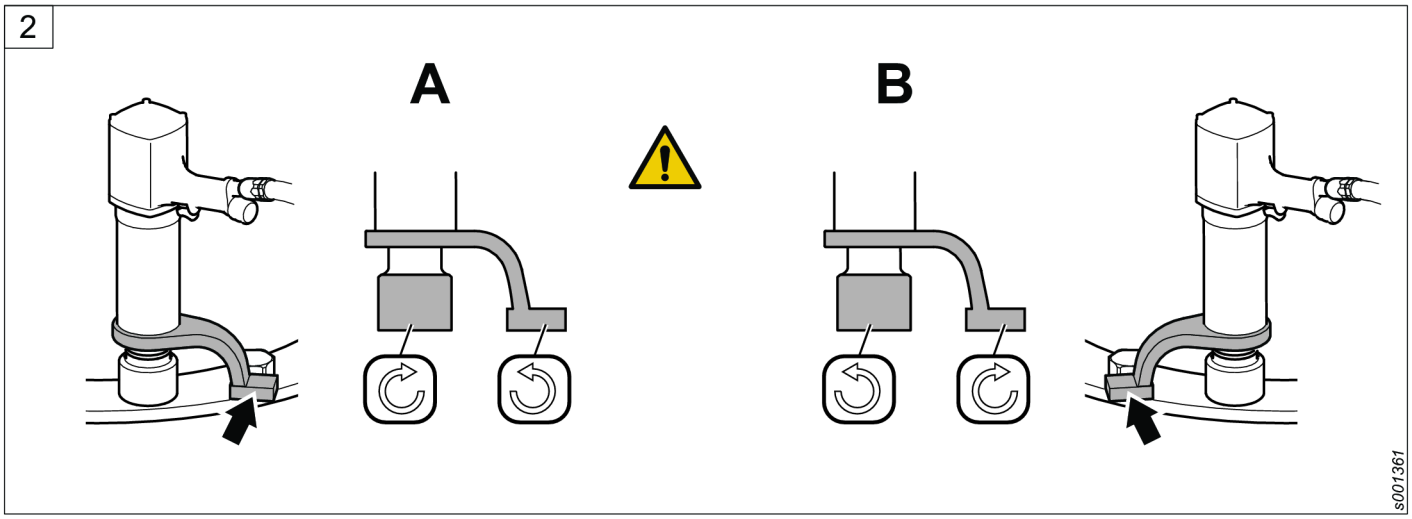

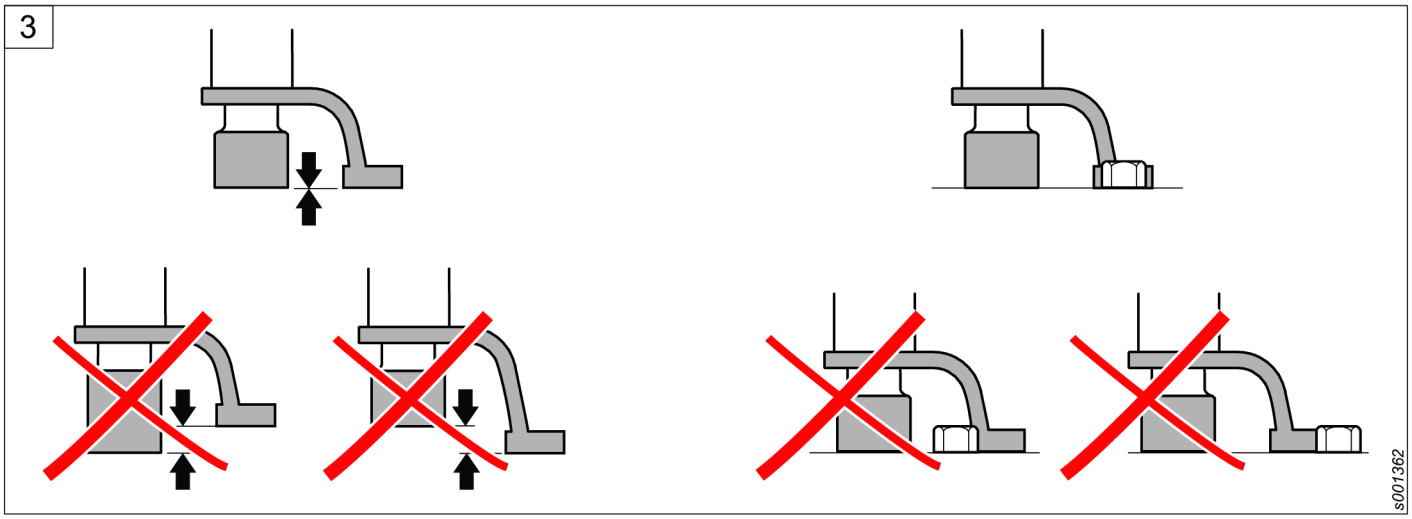

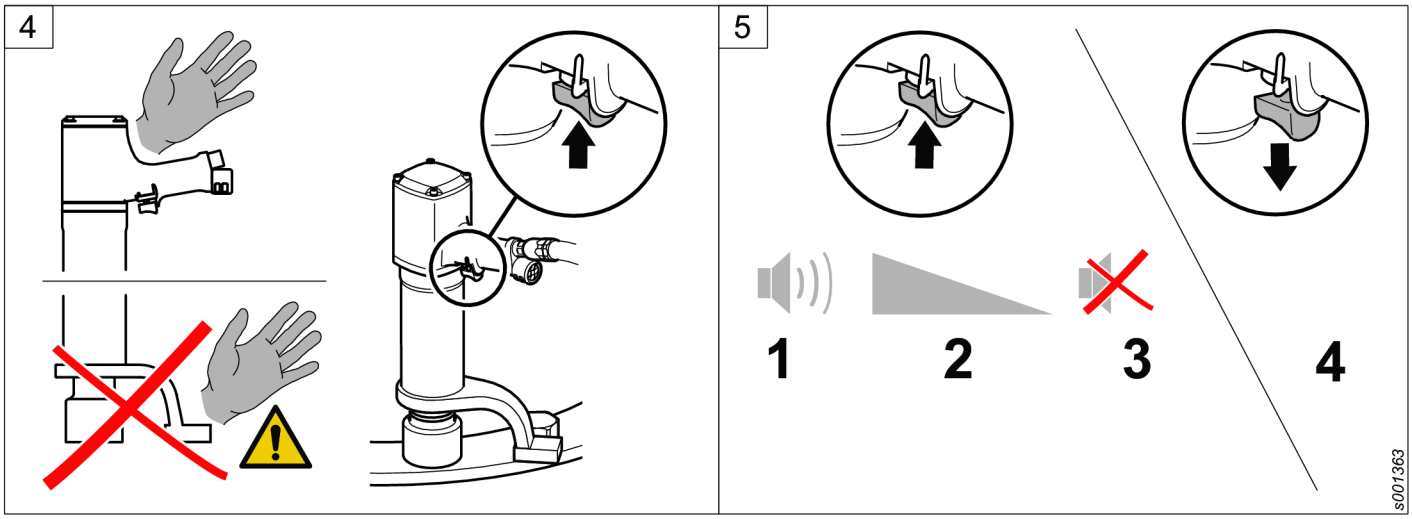


Vedligeholdelse


Hvis reaktionsstangen bruges daglig, skal der foretages en visuel inspektion hver dag af følsomme områder f.eks. tæt på midterhullet og på de tyndeste dele af reaktionsstangen.

⚠ **ADVARSEL Udskift altid revnede eller beskadigede reaktionsstænger.**

© Atlas Copco Industrial Technique AB - 9839 0542 00

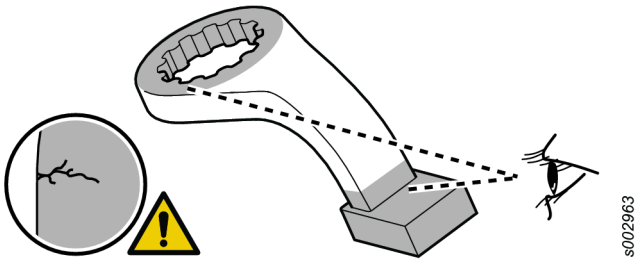

Når en bølget skive er inkluderet, skal du sørge for at samle i den rigtige rækkefølge

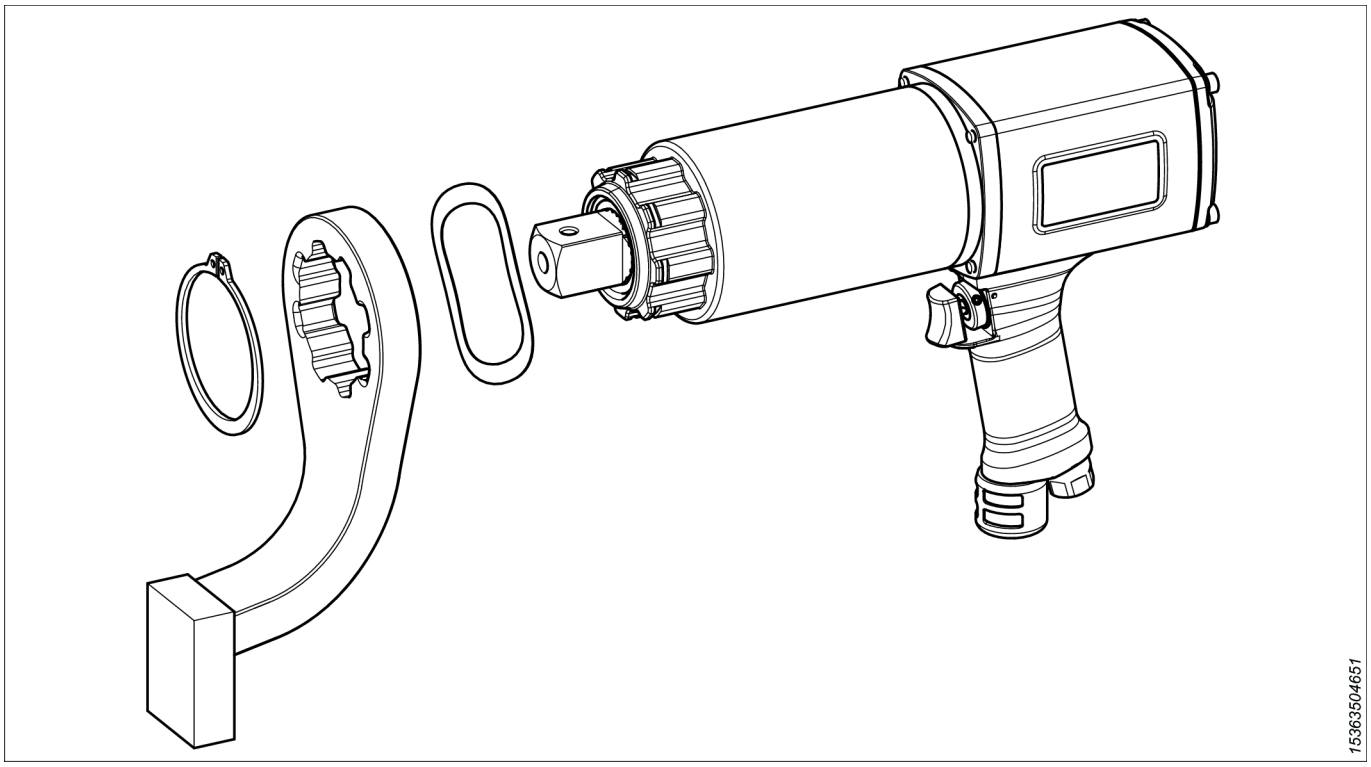

© Atlas Copco Industrial Technique AB - 9839 0542 00

Original instructions

Oversættelse af originalvejledning



Atlas Copco Industrial Technique AB
SE-10523 STOCKHOLM
Sweden
Telephone: +46 8 743 95 00
www.atlascopco.com

© Copyright 2024, Atlas Copco Industrial Technique AB. All rights reserved. Any unauthorized use or copying of the contents or part thereof is prohibited. This applies in particular to trademarks, model denominations, part numbers and drawings. Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty or Product Liability.

Out of respect to wildlife and nature, our technical literature is printed on environmentally friendly paper.