

7803RAKCEX



DURABILITY

Ball and Needle Bearing construction; double-reduction planetary gearing.




CONTROL

Auxiliary side handle.



PERFORMANCE

0.5 HP Motor.

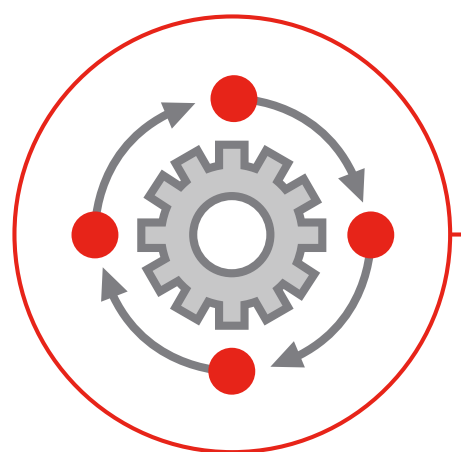

VERSATILITY

Keyless Chuck



SAFETY

Meets Requirements for ATEX Zone 1 and 2.

