
gizmo downlight



Gizmo Downlight fixtures come in two versions, one with Fixed position and one with Adjustable position. Both have interchangable lenses.



S. Skeppsbron 4 802 80 Gävle Sweden info@ljusdesign.se ljusdesign.se +46 26 66 15 00

Technical

Material

Article numbers GIZ*-CCDL-* GIZ*-CCDLA-*

Aluminum Steel

Polycarbonate lens

Finish Black (RAL 9005)

White (RAL 9016) Brass

Protection class IP20 Power consumption Up to 3W

Accessories Mounting ring

Lenses

Safety Instructions


Please read the instructions carefully and save it for future reference

Location. IP20. Only for indoor use. Do not install in wet or damp locations. Do not install the fixture where exposed bare connectors can be shorted or contact any conductive/combustable materials. Keep combustable material away from the fixture and lens.

Driver. Constant current LED driver (Max 700 mA), please always refer to the label affixed to the luminaire for the recommended driver.


Constant Current note. Do not connect or disconnect fixtures under load.

Electrical installation

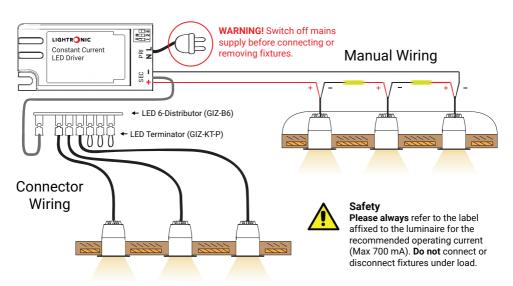



Gizmo Downlight Fixed (CCDL)






Mounting






Lens swap




Gizmo Downlight Adjustable (CCDLA)


Drilling



Mounting



Tilting



Lens swap

