



YE Series 82ESQ Deadbo


Standard Specifications:

Door Prep	Cross bore: 2-1/8" Edge Bore: 1" Latch face: 1" x 2-1/4" RC
Door Thickness	1-3/8" to 1-3/4" doors
Latch Std product	Tubular 2-3/8" or 2-3/4" RC/SC adjustable Tubular Drive-in latch available
Strike	1" x 2-1/4" Radius Corner Deadbolt Strike
Door Handing	Non Handed
Cylinder	5 Pin KW-1 Compatible Optional SC-1
Keying	KA5 std; other options available

Features

- Meets or exceeds Grad
- Std latch/strike screw
wood/metal screw

Dimensions:

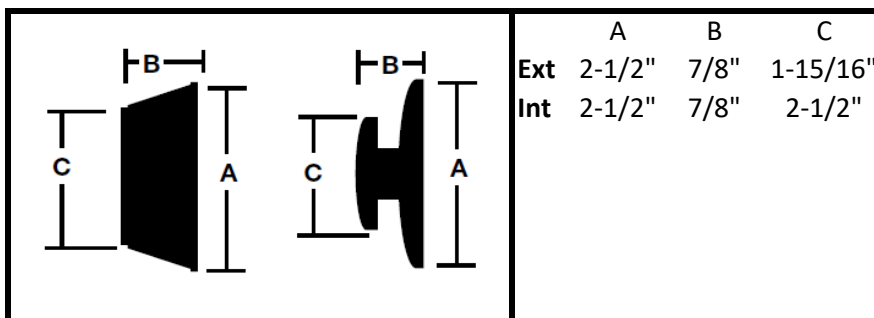

Model	Function	CTN QTY	ItemNumber	
				Available finishes:
82ESQ	Sgl Cylinder	30	619/15	10BP 619/ 15 Black/ B
			EDSC155SQ	
			EDSC155SCSQ	

It

e 3 standards
r is combination



ABLOY