

## Brother FAX-2840 fax machine Laser 33.6 Kbit/s A4 Black, Grey

**Brand :** Brother

**Product code:** FAX-2840

**Product name :** FAX-2840

FAX-2840 Laserfax 20 ppm - 250 sheet - 33.600 bps

Brother FAX-2840 fax machine Laser 33.6 Kbit/s A4 Black, Grey:


- High speed super G3 (33.6kbps) faxing.
- 30 sheet automatic document feeder and 250 sheet lower paper tray.
- 22 one-touch dials.
- Up to 400 page memory transmission/ reception.
- High speed copying at up to 20cpm.
- Supplied with a 1000 page toner.

Brother FAX-2840. Print technology: Laser, Modem speed: 33.6 Kbit/s, Fax resolution modes: Fine, Photo, Standard, Super fine. Maximum copy resolution: 300 x 600 DPI, Copy speed (black, normal quality, A4): 20 cpm, Maximum number of copies: 99 copies. Maximum standard media size: A4, ISO A-series sizes (A0...A9): A4, A5, A6, Supported media weight(s): 60 - 105 g/m². Standard input capacity: 250 sheets, Auto document feeder (ADF) input capacity: 20 sheets, Standard output capacity: 100 sheets. Display: LCD TFT, Display number of lines: 2 lines



| Fax                                    |                                   | Paper handling                            |                    |
|----------------------------------------|-----------------------------------|-------------------------------------------|--------------------|
| Print technology *                     | Laser                             | Supported media weight(s)                 | 60 - 105 g/m²      |
| Colour faxing *                        | ✗                                 | Input & output capacity                   |                    |
| Modem speed *                          | 33.6 Kbit/s                       | Standard input capacity                   | 250 sheets         |
| Fax resolution modes                   | Fine, Photo, Standard, Super fine | Auto document feeder (ADF) input capacity | 20 sheets          |
| Fax transmission speed                 | 2.5 sec/page                      | Standard output capacity                  | 100 sheets         |
| Error Correction Mode (ECM)            | ✓                                 | Display                                   |                    |
| Fax coding methods                     | JBIG, MH, MMR, MR                 | Display                                   | LCD TFT            |
| Fax compatibility                      | ITU-T G3                          | Display number of lines                   | 2 lines            |
| Fax delayed sending                    | ✓                                 | Display number of characters              | 16                 |
| Fax forwarding                         | ✓                                 | Processor                                 |                    |
| Fax dual access                        | ✓                                 | Processor family                          | ARM9               |
| Fax broadcasting                       | 272 locations                     | Processor frequency                       | 200 MHz            |
| Fax speed dialing (max numbers)        | 200                               | Memory                                    |                    |
| Auto-redialing                         | ✓                                 | Maximum internal memory                   | 16 MB              |
| Auto reduction                         | ✓                                 | Fax memory                                | 400 pages          |
| Group dial                             | 8                                 | Technical details                         |                    |
| One-touch dials                        | 22                                | Product colour                            | Black, Grey        |
| Distinctive ring                       | ✓                                 | Sustainability certificates               | ENERGY STAR        |
| Out-of-paper reception                 | 400 pages                         | Sound emission                            |                    |
| Answering machine                      |                                   | Noise level                               | 53 dB              |
| Answering machine *                    | ✗                                 | Noise level (idle)                        | 30 dB              |
| Copying                                |                                   | Weight & dimensions                       |                    |
| Copy function *                        | ✓                                 | Dimensions (WxDxH)                        | 368 x 360 x 311 mm |
| Maximum copy resolution                | 300 x 600 DPI                     | Weight                                    | 9 kg               |
| Copy speed (black, normal quality, A4) | 20 cpm                            |                                           |                    |
| Maximum number of copies               | 99 copies                         |                                           |                    |

| Copying                       |            | Power                         |                    |
|-------------------------------|------------|-------------------------------|--------------------|
| Copier resize                 | 25 - 400%  | Power consumption (typical)   | 365 W              |
| N-in-1 copy function (N=)     | 2, 4       | Power consumption (standby)   | 55 W               |
| Greyscale levels              | 256        | Power consumption (PowerSave) | 1.5 W              |
| Paper handling                |            | AC input voltage              | 220-240 V          |
| Maximum standard media size * | A4         | AC input frequency            | 50 - 60 Hz         |
| ISO A-series sizes (A0...A9)  | A4, A5, A6 | Packaging data                |                    |
|                               |            | Package dimensions (WxDxH)    | 476 x 458 x 436 mm |
|                               |            | Package weight                | 12.9 kg            |

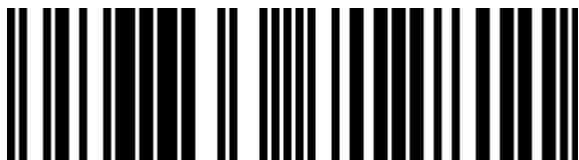


4977766712811




0012502632740




012502632740

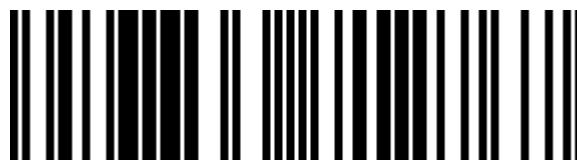


4977766712767

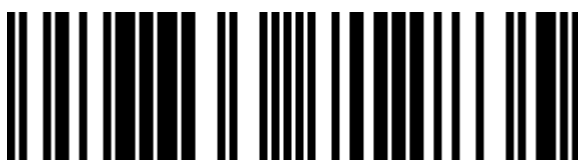


4977766712835

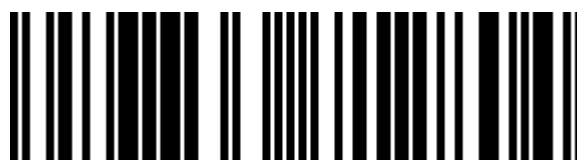


4977766712804

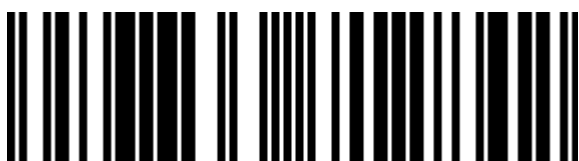

4977766712842

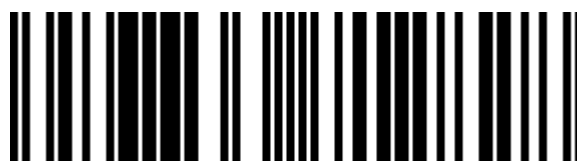

4977766712828

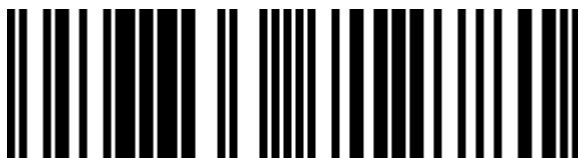

4977766712781



4977766712774

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.