

APC Smart-UPS RT 1000VA, 230V, rackmount, 2U, 6x IEC 60320 & 2x IEC Jumpers outlets, w/network card



Brand : APC

Product code: SURT1000RMXLI-NC



Product name : Smart-UPS RT 1000VA, 230V, rackmount, 2U, 6x IEC 60320 & 2x IEC Jumpers outlets, w/network card

Smart-UPS RT 1000VA, 230V, rackmount, 2U, 6x IEC 60320 & 2x IEC Jumpers outlets, w/network card

APC Smart-UPS RT 1000VA, 230V, rackmount, 2U, 6x IEC 60320 & 2x IEC Jumpers outlets, w/network card:

High density, double-conversion on-line power protection with scalable runtime. APC Smart-UPS RT 1000VA, 230V, rackmount, 2U, 6x IEC 60320 & 2x IEC Jumpers outlets, w/network card. UPS topology: Double-conversion (Online), Output power capacity: 1 kVA, Output power: 700 W. AC outlet types: C13 coupler, Power plug: C14 coupler, AC outlets quantity: 6 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 328 VAh, Typical backup time at half load: 32 min. Form factor: Rackmount/Tower, Product colour: Black, Rack capacity: 2U. Width: 432 mm, Depth: 483 mm, Height: 85 mm

Features		Battery	
UPS topology *	Double-conversion (Online)	Automatic battery test	✓
Output power capacity *	1 kVA	Cold start	✓
Output power *	700 W	Design	
Waveform *	Sine	Form factor *	Rackmount/Tower
Input operation voltage (min) *	100 V	Rack capacity	2U
Input operation voltage (max) *	280 V	Product colour *	Black
Input frequency *	50/60 Hz	LED indicators	Status
Output operation voltage (min)	220 V	International Protection (IP) code	IP20
Output operation voltage (max)	240 V	Certification	C-tick, CE, EN 50091-1, EN 50091-2, EN 60950, EN 61000-3-2, GOST, VDE
Surge energy rating	240 J	Operational conditions	
Efficiency	88.9%	Operating temperature (T-T)	0 - 40 °C
Crest factor	3:1	Storage temperature (T-T)	-20 - 50 °C
Noise level	50 dB	Operating relative humidity (H-H)	0 - 95%
Surge protection	✓	Storage relative humidity (H-H)	0 - 95%
Audible alarm(s)	✓	Operating altitude	0 - 3000 m
Auto-restart	✓	Non-operating altitude	0 - 15000 m
Ports & interfaces		Technical details	
AC outlet types	C13 coupler	Compliance certificates	RoHS
Power plug	C14 coupler	Weight & dimensions	
AC outlets quantity	6 AC outlet(s)	Width	432 mm
Number of output IEC jumpers	2	Depth	483 mm
Serial interface	✓	Height	85 mm
Serial interface type	RS-232	Weight	23 kg
SmartSlot	✓	Package width	630 mm
Battery		Package depth	594 mm
Battery technology	Sealed Lead Acid (VRLA)	Package height	286 mm
Battery capacity	328 VAh	Package weight	27.8 kg
Typical backup time at half load	32 min	Logistics data	
Battery life (max)	5 year(s)	Products per pallet	4 pc(s)
Battery recharge time	3 h	Harmonized System (HS) code	85078000
Hot-swap battery	✓	Products per master (outer) case	1 pc(s)

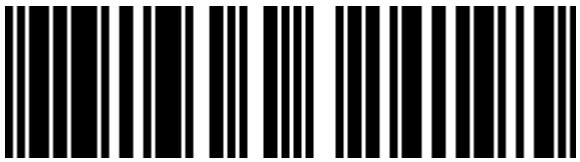

731304324195

0731304324195



8592978061661

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.