

Basic PDU


PE0112 Series

The PE0112 series Basic PDU contains 12 AC outlets and is available in IEC or NEMA socket configurations. The PE0112 series Basic PDU features a space-saving 1U design that allows it to be mounted vertically on the outside of a rack, resulting in a more efficient use of space in the server room, while providing 12 AC outlets.

PE0112A Front View



PE0112G Front View

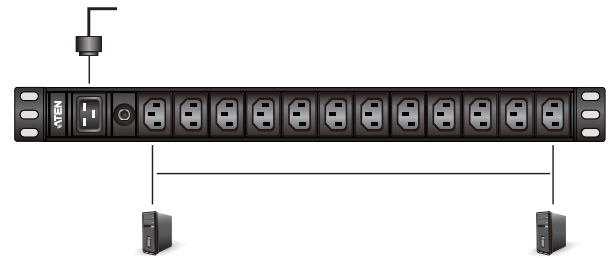

Features

Basic PDU

- Space saving — 1U rack mount design
- IEC or NEMA outlet models
- Overcurrent Protection
- Aluminum material

Typical Applications

- Servers
- Network Devices
- Telecom Equipment

Specifications

	PE0112A	PE0112G
Electrical		
Nominal Input Voltage	100-120 VAC	100-240 VAC
Maximum Input Current	15A Max, (UL derating 12A Max)	10A Max
Input Frequency	50-60 Hz	50-60 Hz
Input Connection	IEC-320 C14	IEC-320 C14
Input Power	IEC-320 C13 / NEMA 5-15P	IEC-320 C13 / IEC-320 C14
Outlet Type	(12) NEMA 5-15R	(12) IEC 320 C13
Maximum Output Current (Outlet)	15A Max; (UL derating 12A Max); (PSE 10A)	10A max
Maximum Output Current (Bank)	15A Max; (UL derating 12A Max)	10A max
Maximum Output Current (Total)	15A Max; (UL derating 12A Max)	10A max
OPD (Overcurrent Protection Device)	Yes	Yes
Physical Properties		
Dimensions (L x W x H)	48.80 x 4.40 x 4.50 cm	48.80 x 4.40 x 4.50 cm
Weight	0.62kg	0.62kg
Power Cord Length	10ft (14#)	10ft (3x1.0mm ²)
Environmental		
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C*	0 – 40°C / -20 – 60°C*
Elevation	3000m	3000m
Compliance		
EMC Verification	FCC Class A	CE Class A
Safety Verification		CE,LVD

