

# ST4300USB3 ST4300USB3GB ST4300USB3EU

## 4-Port Black SuperSpeed USB 3.0 Hub

StarTech.com  
Hard-to-find made easy

## Installation Guide

### Packaging Contents

- 1 x USB 3.0 hub
- 1 x USB 3.0 cable
- 1 x Power Adapter

### System Requirements

- USB enabled computer system with an available USB port
- Available AC power outlet (optional)
- Microsoft® Windows® XP/Server 20E03/  
Vista/Server 2008 R2/7 (32/64-bit)

## Installation

1. Connect the included power adapter to the USB hub. The power LED should light up solid. Supplying external power is optional, however to ensure each USB port is fully powered, connecting external power is recommended.

2. Connect the USB cable from the USB hub (type B port) to the host computer system.

**NOTE:** If connected to a USB 2.0 host port, the hub will only operate at USB 2.0 speeds.

3. The operating system should detect the hub immediately and automatically install it.


4. Once installation is complete, USB 1.x/2.0/3.0 devices should be able to be connected to the hub and recognized.

### Warranty Information


This product is backed by a two year warranty. In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.



\*actual product may vary from photos

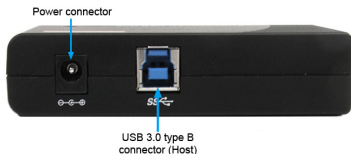

## Specifications

Bus Interface	USB 3.0
Number of Ports	4
Chipset ID	VLI VL810
Connectors	4 x USB 3.0 type A female 1 x USB 3.0 type B female 1 x DC Power
LEDs	1 x Power
Maximum Data Transfer Rate	USB 3.0: 5 Gbps
Enclosure Material	Plastic
Power Adapter	5VDC, 2000mA, type M plug
Operating Temperature	0°C ~ 55°C (32°F ~ 131°F)
Storage Temperature	-20°C ~ 85°C (-4°F ~ 185°F)
Humidity	5% ~ 95% RH
Dimensions	152.0mm x 59.6mm x 23.5mm
Weight	480 g
Compatible Operating Systems	Windows XP/Server 2003/Vista/ Server 2008 R2/7 (32/64-bit)

Manual Revision: 10/27/2010  
For the most up-to-date information, please visit [www.startech.com](http://www.startech.com)