



D-Link DXS-1210-12TC network switch Managed L2 10G Ethernet (100/1000/10000) 1U Black, Silver

Brand : D-Link

Product code: DXS-1210-12TC


Product name : DXS-1210-12TC



240 Gbps, 10x 10G Base-T, 2x SFP+, 2x SFP+/Combo, 91W  
D-Link DXS-1210-12TC. Switch type: Managed, Switch layer: L2. Basic switching RJ-45 Ethernet ports type: 10G Ethernet (100/1000/10000), Basic switching RJ-45 Ethernet ports quantity: 12. MAC address table: 16000 entries, Switching capacity: 240 Gbit/s. Networking standards: IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3an, IEEE 802.3az, IEEE 802.3u, IEEE 802.3z. Power connector: DC-in jack. Rack mounting, Form factor: 1U

Management features		Technical details	
Switch type *	Managed	Products per shipping (inner) case	3 pc(s)
Switch layer	L2	Pallet gross weight (air)	278.2 kg
Quality of Service (QoS) support	✓	Master (outer) cases per pallet (air)	18 pc(s)
Ports & interfaces		Products per pallet (air)	54 pc(s)
Basic switching RJ-45 Ethernet ports quantity *	12	Pallet gross length	110 cm
Basic switching RJ-45 Ethernet ports type *	10G Ethernet (100/1000/10000)	Pallet gross width	120 cm
Combo SFP ports quantity	2	Pallet height (air)	128.4 cm
SFP+ module slots quantity	2	Pallet gross weight (sea)	451.2 kg
Power connector	DC-in jack	Master (outer) cases per pallet (sea)	30 pc(s)
Network		Products per pallet (sea)	90 pc(s)
Networking standards *	IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3an, IEEE 802.3az, IEEE 802.3u, IEEE 802.3z	Pallet height (sea)	2.05 m
10G support *	✓	Shipping (inner) case gross weight	14.4 kg
Auto MDI/MDI-X	✓	Power	
Spanning tree protocol	✓	AC input voltage	100 - 240 V
VLAN support	✓	Power consumption (typical)	90.81 W
Data transmission		Power over Ethernet (PoE)	
Switching capacity *	240 Gbit/s	Power over Ethernet (PoE) *	✗
Throughput	178.56 Mpps	Operational conditions	
MAC address table *	16000 entries	Operating temperature (T-T)	-5 - 50 °C
Jumbo frames support	✓	Storage temperature (T-T)	-40 - 70 °C
Security		Operating relative humidity (H-H)	0 - 95%
IGMP snooping	✓	Weight & dimensions	
Design		Width	210 mm
Rack mounting *	✓	Depth	440 mm
Form factor	1U	Height	44 mm
Product colour	Black, Silver	Weight	3.15 kg
LED indicators	✓	Packaging data	
Safety	cUL, CB, CE, CCC, BSMI	Package width	349 mm
Certification	CE, FCC, C-Ticket, VCCI, BSMI, CCC	Package depth	546 mm
Technical details		Package height	96 mm
Shipping (inner) case height	38.3 cm	Package weight	4.48 kg
Shipping (inner) case width	31.4 cm	Sustainability	
		Sustainability certificates	ENERGY STAR

Technical details		Logistics data	
Shipping (inner) case length	56.2 cm	Harmonized System (HS) code	85176990
Shipping (inner) case net weight	13.4 kg		

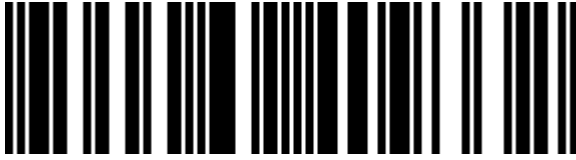

0790069409332



790069409332

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 01-AUG-2024. Prints or copies of Information are only valid on the printed Publication date