


# XXcm USB 2.0 Power Delivery(5A) C to C Cable - M/M

USB2C5CXXM

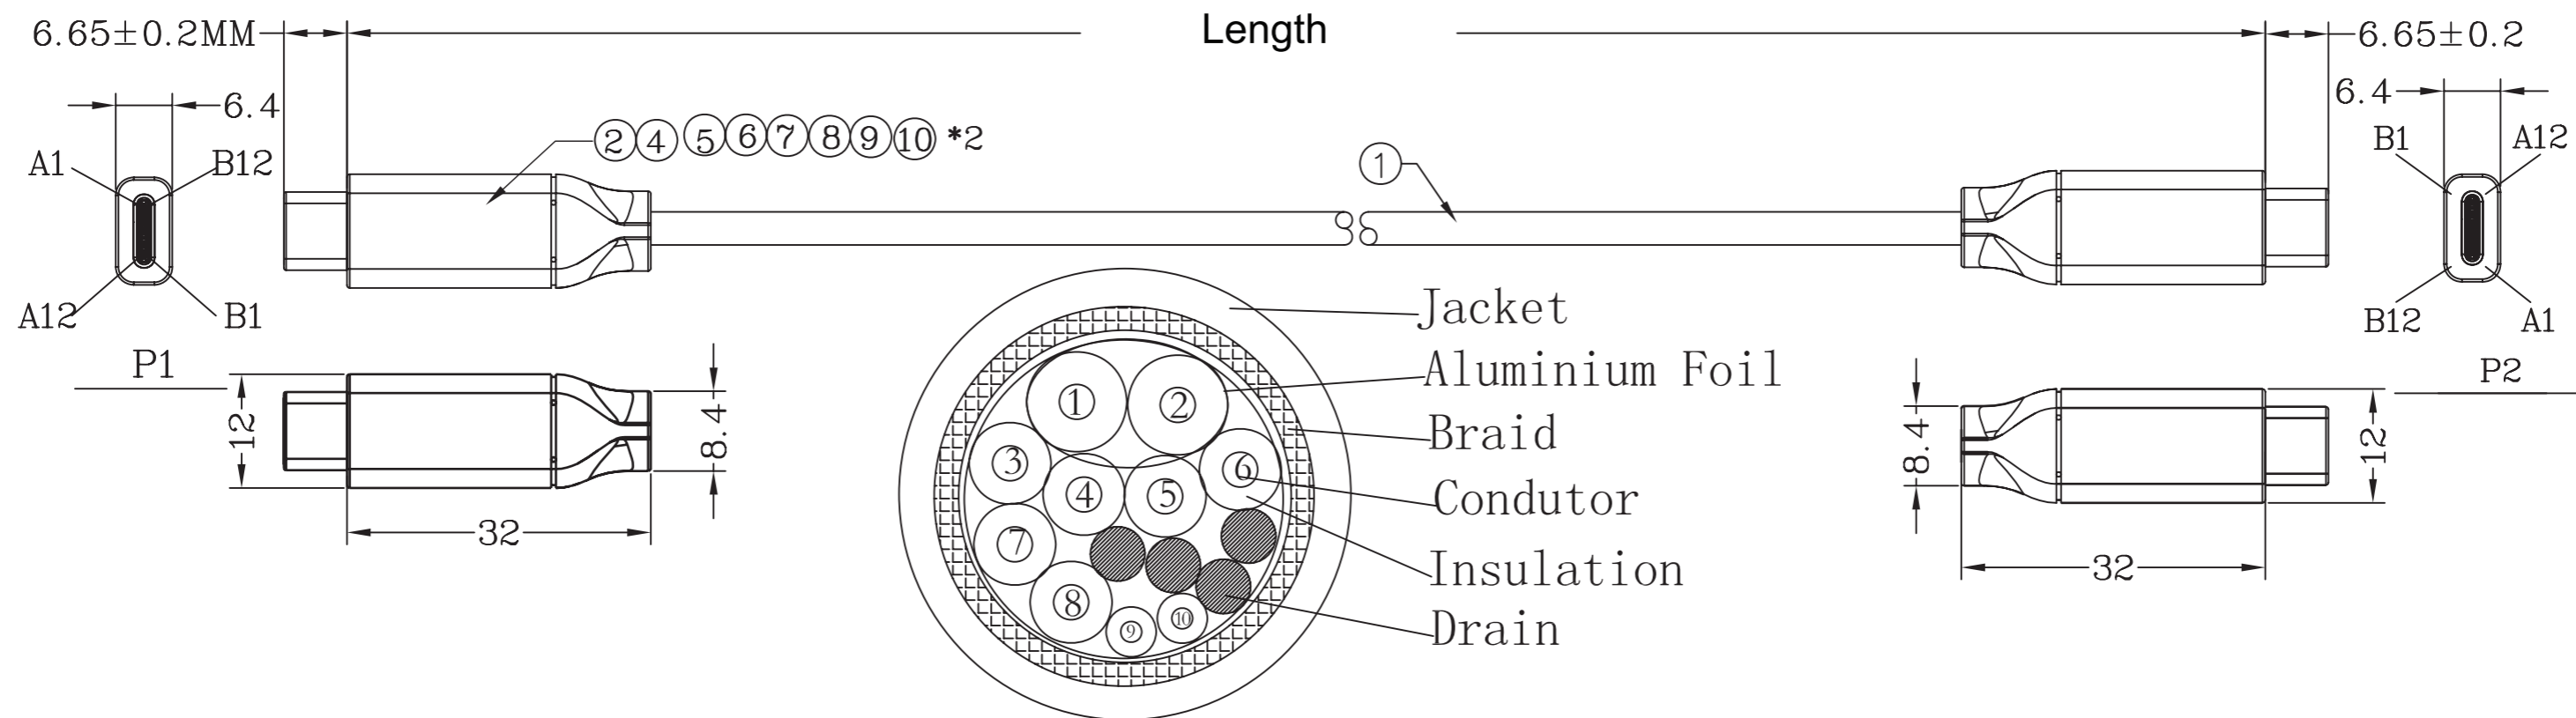

## ELECTRICAL TEST:

- 1.100% OPEN SHORT SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:3 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

| P/N         | Length (xx) | Tolerance |
|-------------|-------------|-----------|
| USB2C5C50CM | 50CM        | +/- 30mm  |
| USB2C5C1M   | 1M          | +/- 30mm  |
| USB2C5C2M   | 2M          | +/- 30mm  |
| USB2C5C3M   | 3M          | +/- 40mm  |

| NO | DESCRIPTION  | Q'TY  | UNIT |
|----|--|-------|------|
| ⑨  | W=5MM 25u Copper foil  | 0.024 | M    |
| ⑧  | USB TYPE C~Solder~Tinplate On the cover Nickel plated  | 2     | PCS  |
| ⑦  | USB TYPE C~Solder~Tinplate Under cover Nickel plated   | 2     | PCS  |
| ⑥  | 45P Black PVC  | 16    | g    |
| ⑤  | Low pressure internal mold hardness :40~48D, UL94V-0   | 1     | g    |
| ④  | H.S.T φ 1.5 *12mm*2PCS   | 0.012 | M    |
| ③  | TYPEC-USB2.0 C Type Connector With~PCB+IC(VL151) ~Shell nickel plated~   | 1     | SET  |
| ②  | TYPEC-USB2.0 C Type Connector With~PCB~shell nickel plated~  | 1     | SET  |
| ①  | NO~UL~{26AWG(7/0.16TC)*1P+AL}+24AWG(26/0.10TC)*6C+30AWG(7/0.10TC)*2C+4E(26/0.10TC)+AB(16/9/0.10TC 85%TC)~OD:5.0MM~Jacket color:Black | 3.0   | M    |
|    |  |       |      |

## PIN OUT

