




D-Link DEM-QX01Q-SR4 network transceiver module Fiber optic
40000 Mbit/s QSFP+ 850 nm

Brand : D-Link


Product code: DEM-QX01Q-SR4

Product name : DEM-QX01Q-SR4

40GBASE-SR4, Multi-mode OM3 (100 m), OM4 (150 m), QSFP+
D-Link DEM-QX01Q-SR4. SFP transceiver type: Fiber optic, Maximum data transfer rate: 40000 Mbit/s,
Interface type: QSFP+. Product colour: Beige, Silver, Certification: • FCC Class B • CE Class B • VCCI
Class B • FDA/CDRH • TUV • CSA. Input voltage: 3.3 V, Maximum current: 0.35 A. Width: 18.4 mm,
Depth: 115.8 mm, Height: 13.3 mm. Package width: 74 mm, Package depth: 131 mm, Package height:
49 mm

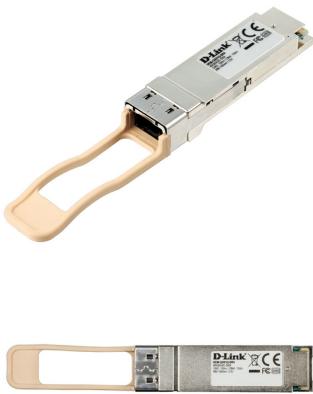

Performance		Weight & dimensions	
SFP transceiver type *	Fiber optic	Depth	115.8 mm
Maximum data transfer rate *	40000 Mbit/s	Height	13.3 mm
Interface type *	QSFP+	Weight	40 g
Multi-mode fiber (MMF) supported	✓	Packaging data	
Fiber optic connector	MPO	Package width	74 mm
SFP transceiver standard	SR4	Package depth	131 mm
Maximum transfer distance	150 m	Package height	49 mm
Wavelength	850 nm	Package weight	64 g
Tx power (min)	-7.6 dBmW	Technical details	
Tx power (max)	2.4 dBmW	Sustainability certificates	RoHS
Rx power (min)	-9.5 dBmW	Compliance certificates	RoHS
Rx power (max)	2.4 dBmW	Logistics data	
Link budget	11.9 dB	Shipping (inner) case length	36 cm
Networking standards	IEEE 802.3ba	Shipping (inner) case width	26 cm
Digital Diagnostics Monitoring (DDM)	✓	Shipping (inner) case height	31 cm
Features		Shipping (inner) case net weight	3.2 kg
Product colour	Beige, Silver	Products per shipping (inner) case	50 pc(s)
Hot-Plug support	✓	Pallet gross weight (air)	272 kg
Certification	• FCC Class B • CE Class B • VCCI Class B • FDA/CDRH • TUV • CSA	Master (outer) cases per pallet (air)	60 pc(s)
Power		Products per pallet (air)	3000 pc(s)
Input voltage	3.3 V	Pallet gross length	102 cm
Maximum current	0.35 A	Pallet gross width	122 cm
Operational conditions		Pallet height (air)	199 cm
Operating temperature (T-T)	0 - 70 °C	Pallet gross weight (sea)	272 kg
Storage temperature (T-T)	-10 - 75 °C	Master (outer) cases per pallet (sea)	60 pc(s)
Operating relative humidity (H-H)	0 - 85%	Products per pallet (sea)	3000 pc(s)
Storage relative humidity (H-H)	0 - 85%	Pallet height (sea)	199 cm
Weight & dimensions		Shipping (inner) case gross weight	4.2 kg
Width	18.4 mm	Harmonized System (HS) code	85369010

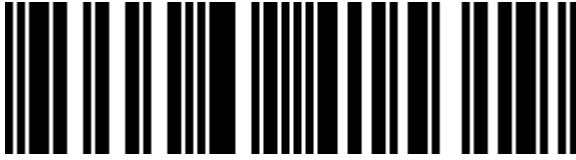

0790069415319



790069415319

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 01-AUG-2024. Prints or copies of Information are only valid on the printed Publication date