



**APC Easy UPS On-Line, 1000VA, Lithium-ion, Rack/Tower 4U, 230V, 6 IEC C13 outlets, Intelligent Card Slot, Extended runtime, W/ rail kit**

**Brand :** APC

**Product code:** SRVL1KRILRK

**Product name :** Easy UPS On-Line, 1000VA, Lithium-ion, Rack/Tower 4U, 230V, 6 IEC C13 outlets, Intelligent Card Slot, Extended runtime, W/ rail kit




Easy UPS On-Line, 1000VA, Lithium-ion, Rack/Tower 4U, 230V, 6 IEC C13 outlets, Intelligent Card Slot, Extended runtime, W/ rail kit

APC Easy UPS On-Line, 1000VA, Lithium-ion, Rack/Tower 4U, 230V, 6 IEC C13 outlets, Intelligent Card Slot, Extended runtime, W/ rail kit. UPS topology: Double-conversion (Online), Output power capacity: 1 kVA, Output power: 900 W. AC outlet types: C13 coupler, Power plug: C14 coupler, AC outlets quantity: 6 AC outlet(s). Battery technology: Lithium-ion (Li-Ion), Battery voltage: 48 V, Typical backup time at full load: 136 min. Form factor: Rackmount/Tower, Product colour: Black, Rack capacity: 4U. Width: 438 mm, Depth: 616 mm, Height: 172 mm



Features		Battery	
UPS topology *	Double-conversion (Online)	Typical backup time at full load	136 min
Output power capacity *	1 kVA	Typical backup time at half load	261 min
Output power *	900 W	Battery life (max)	10 year(s)
Waveform *	Sine	Battery recharge time	8.5 h
Input operation voltage (min) *	110 V	Design	
Input operation voltage (max) *	300 V	Form factor *	Rackmount/Tower
Input frequency *	40 - 70 Hz	Rack capacity	4U
Output operation voltage (max)	230 V	Cooling type	Active
Output frequency	50/60 Hz	Built-in fan	✓
Surge energy rating	945 J	Product colour *	Black
Efficiency	90%	Control type	Buttons
Crest factor	3:1	Display type	LCD
ECO mode	✓	LED indicators	✓
Emergency Power Off (EPO)	✓	International Protection (IP) code	IP20
Noise level	50 dB	Certification	CB , CE, EAC, IEC 60204-2, IEC 60730-1, IEC 62040-1 safety, IEC 62619, KC, RCM, TISI, UKCA, UN 38.3, RoHS
Audible alarm(s)	✓		
Audible alarm modes	Low battery alarm, Overload alarm		
Power source type	AC	Operational conditions	
Detachable power cord	✓	Storage temperature (T-T)	-20 - 50 °C
Ports & interfaces		Operating relative humidity (H-H)	0 - 95%
AC outlet types	C13 coupler	Storage relative humidity (H-H)	0 - 95%
Power plug	C14 coupler	Non-operating altitude	0 - 15000 m
AC outlets quantity	6 AC outlet(s)	Technical details	
USB port	✓	Compliance certificates	CE, RoHS, UKCA
USB port type	USB Type-B	Weight & dimensions	
Serial interface	✓	Width	438 mm
Serial interface type	RS-232	Depth	616 mm
RS-232 ports	1		

Ports & interfaces		Weight & dimensions	
Modem (RJ-11) ports	1	Height	172 mm
Ethernet LAN (RJ-45) ports	1	Weight	36.3 kg
Emergency Power Off (EPO) connector	✓	Package width	800 mm
Battery		Package depth	600 mm
Battery technology	Lithium-Ion (Li-Ion)	Package height	480 mm
Battery voltage	48 V	Package weight	48.8 kg
Packaging data			
		Rack mount kit	✓
		Cables included	Output power cable, Phone (RJ-11), RJ-45, RS-232, USB cable

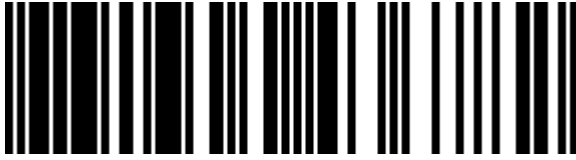

0731304436782



731304436782

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.