

CL6700 (CL6700N: 19" LCD)

DVI LCD Console


- The CL6700 DVI LCD Console is a KVM control unit featuring an integrated 19" DVI LCD panel, a full keyboard, and a touch pad in a 1U rack-mountable sliding housing with audio support. The CL6700 serves as the front end sliding console for compatible DVI KVM switches. This means users who already have a compatible KVM switch can take advantage of the space saving and efficiency benefits of the sliding console module without having to purchase a KVM switch module.

For added convenience, a port for an external USB mouse is provided on the unit's front panel, while ports for an extra console (USB mouse, USB keyboard, DVI monitor and VGA monitor) for a second user are provided on the rear panel.



Features

- **Integrated KVM console with a 19" DVI LCD monitor in a single rail housing with top and bottom clearance for smooth operation in a 1U high system rack**
- Standard rack mount kit included – optional Easy Rack Mounting (single person installation) rack mount kit available (requires separate purchase)
- **Supports an external console with USB / DVI / VGA connectors**
- Additional hot-pluggable USB mouse port on front panel (also functions as USB peripheral port)
- **Audio support (speakers)**
- Superior video quality – up to 1280 x 1024 @75 Hz; DDC, DDC2, DDC2B
- Standard 105-key keyboard; Sun keyboard emulation
- Multiplatform support – Windows, Linux, Mac, and Sun
- **Compatible with most ATEN DVI KVM Switches**
- Adjustable depth to fit within the rack
- Firmware upgradeable
- Console lock – enables the console drawer to remain securely locked away in position when not in use
- DDC emulation – video settings of each computer are automatically adjusted for optimal output to the monitor

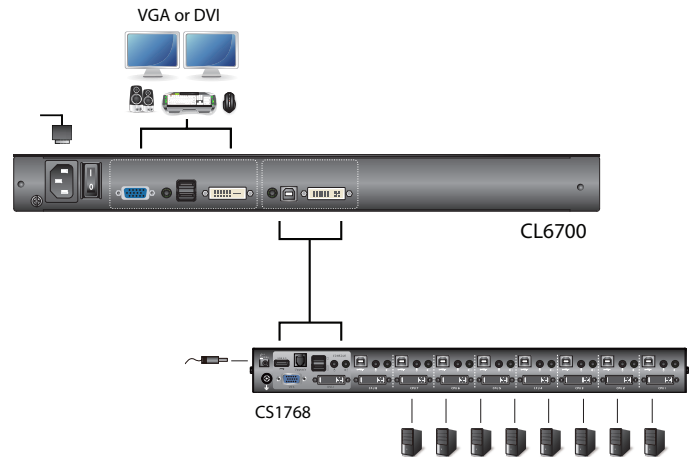

Specification

Function		CL6700	
Computer Connections		1	
Console Selection		Hotkey	
Connectors	External Console Ports	Keyboard	1 x USB Type A Female (White)
		Mouse	1 x USB Type A Female (White)
		Monitor 1	1 x DVI-D Female (White)
		Monitor 2	1 x HDB-15 Female (Blue)
	KVM Ports	Speaker	1 x Mini Stereo Jack Female (Green)
		KB / Mouse	1 x USB Type B Female (White)
		Monitor	1 x DVI-I Female (White)
	External Mouse / Peripheral	Speaker	1 x Mini Stereo Jack Female (Green)
		Power	1 x USB Type A Female (Black)
	Switches	Reset	1 x 3-prong AC Socket
Power		1 x Semi-recessed Pushbutton	
F/W Upgrade		1 x Rocker	
LCD Power		1 x Slide	
LCD Adjustment		1 x Pushbutton	
LEDs	Power	LCD Adjustment	4 x Pushbutton
		Num	1 (Green)
		Caps	1 (Green)
		Scroll	1 (Green)
Emulation	Keyboard / Mouse	USB	
Video		1280 x 1024@75Hz, DDC2B	
I/P Rating		100–240VAC; 50–60Hz; 1A	
Power Consumption		120V, 24.6W / 230V, 25.4W	
Environment	Operating Temp.	0–50°C	
	Storage Temp.	-20–60°C	
	Humidity	0–80% RH Non-condensing	
Physical Properties	Housing	Metal	
	Weight	13.09 kg	
Dimensions (L x W x H)		58.92 x 48.50 x 4.40 cm	

* Product specifications and appearance are subject to change without notice.

