


Find your product and get support




QUICK START GUIDE

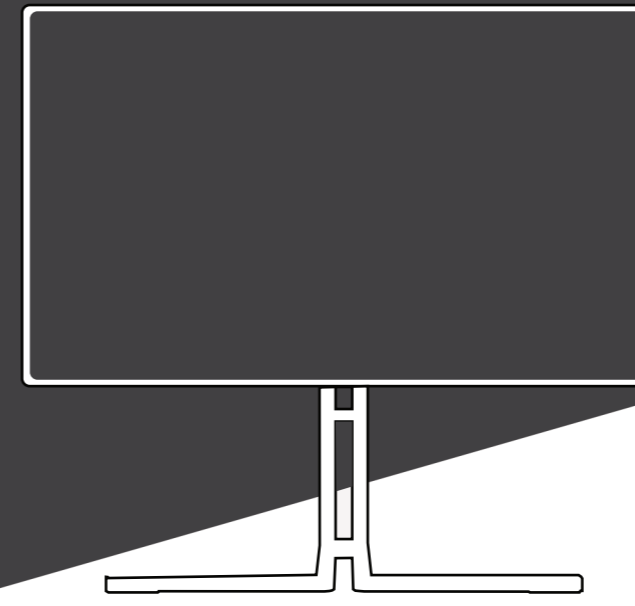



U27U3CV
MONITOR

AOC.COM
©2024 AOC. All rights reserved


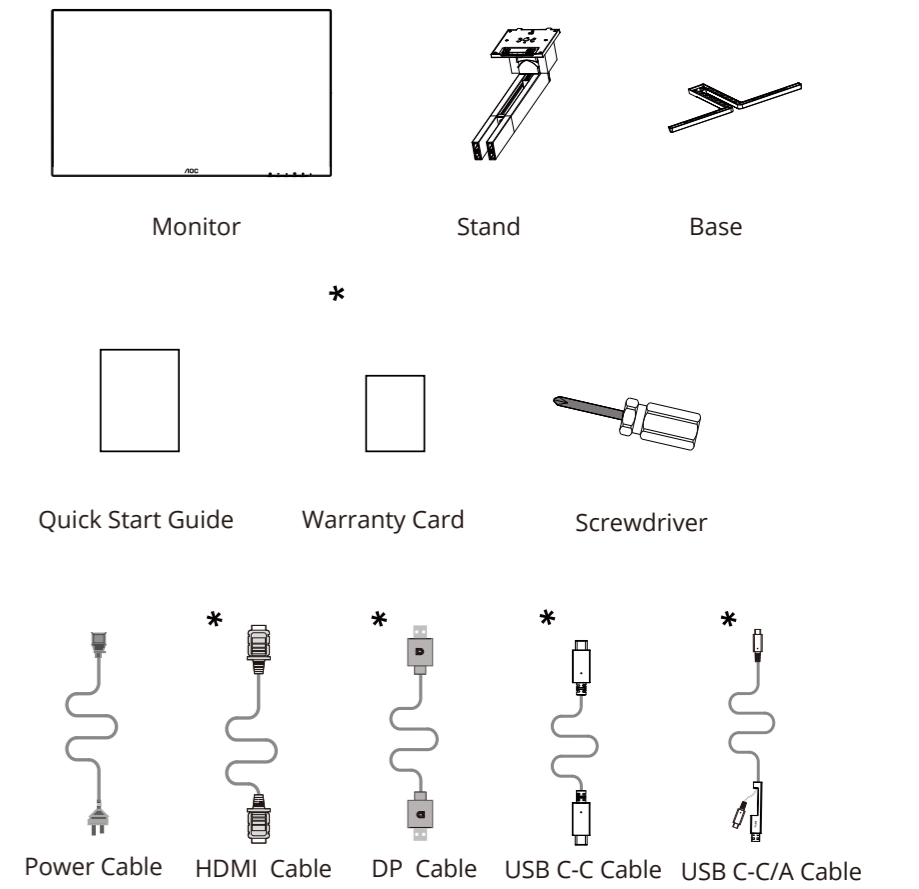


*Different according to countries/regions
Display design may differ from that illustrated


1

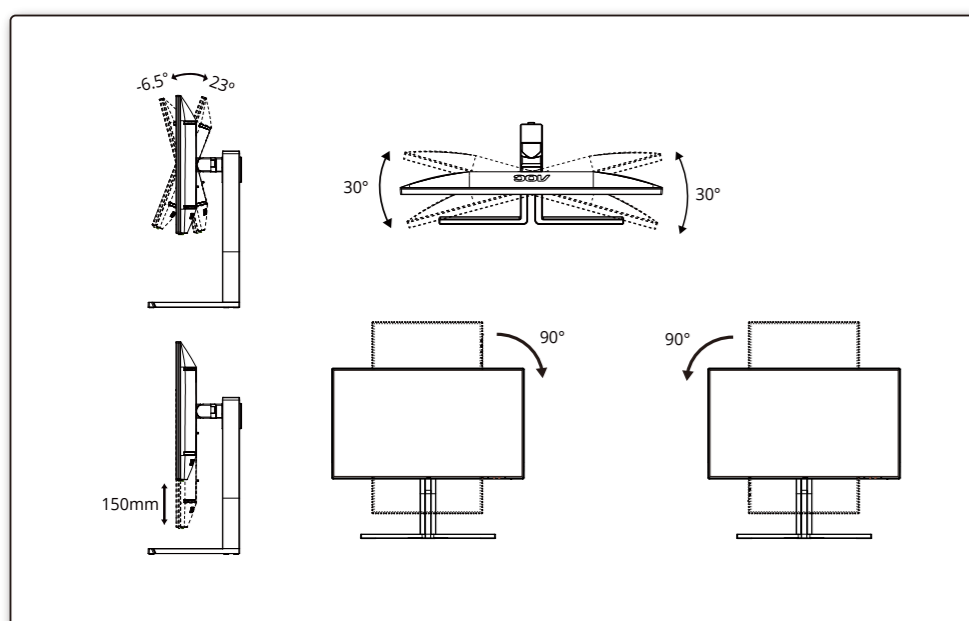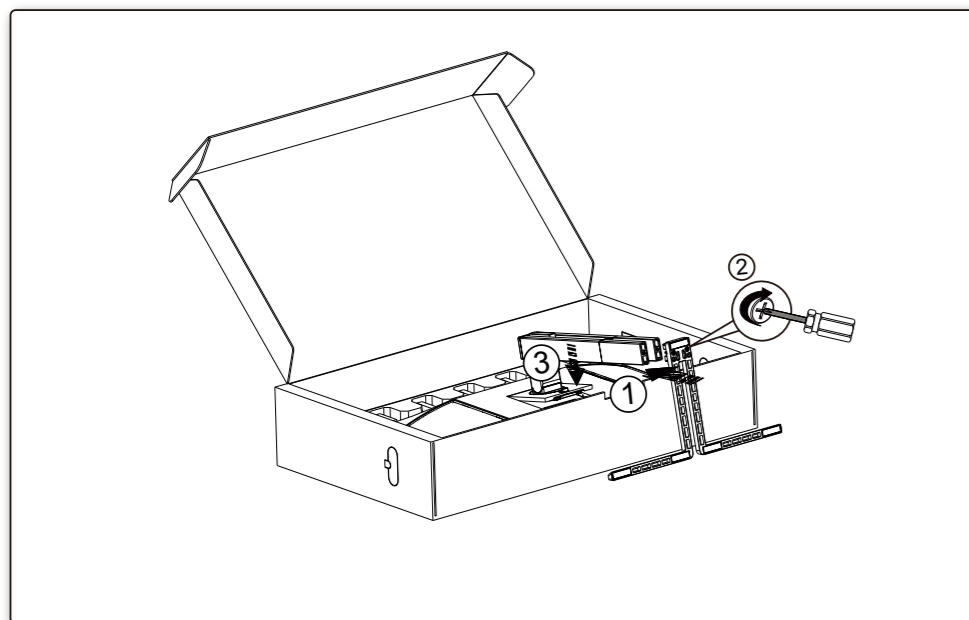

2

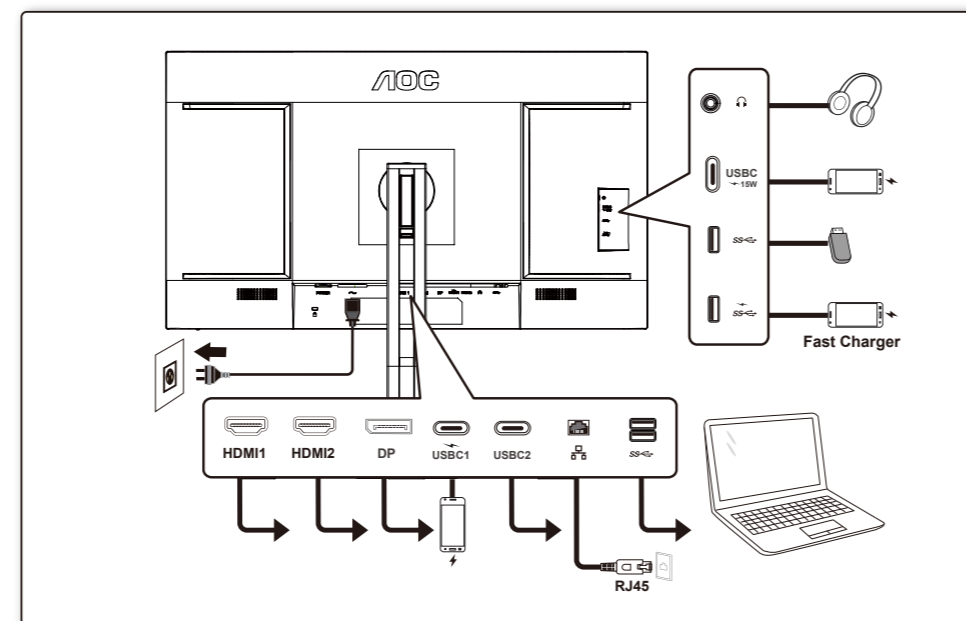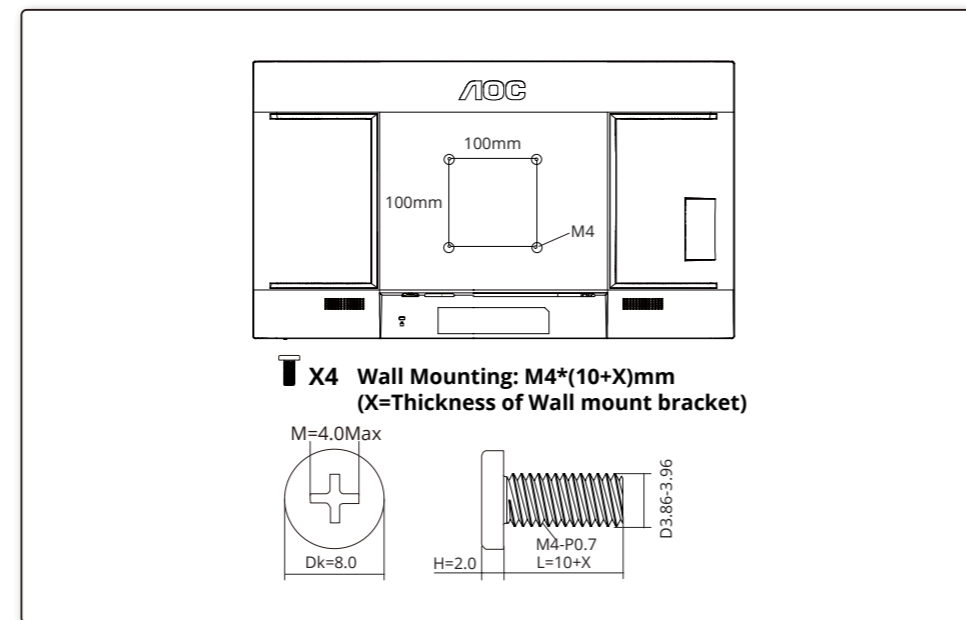

3

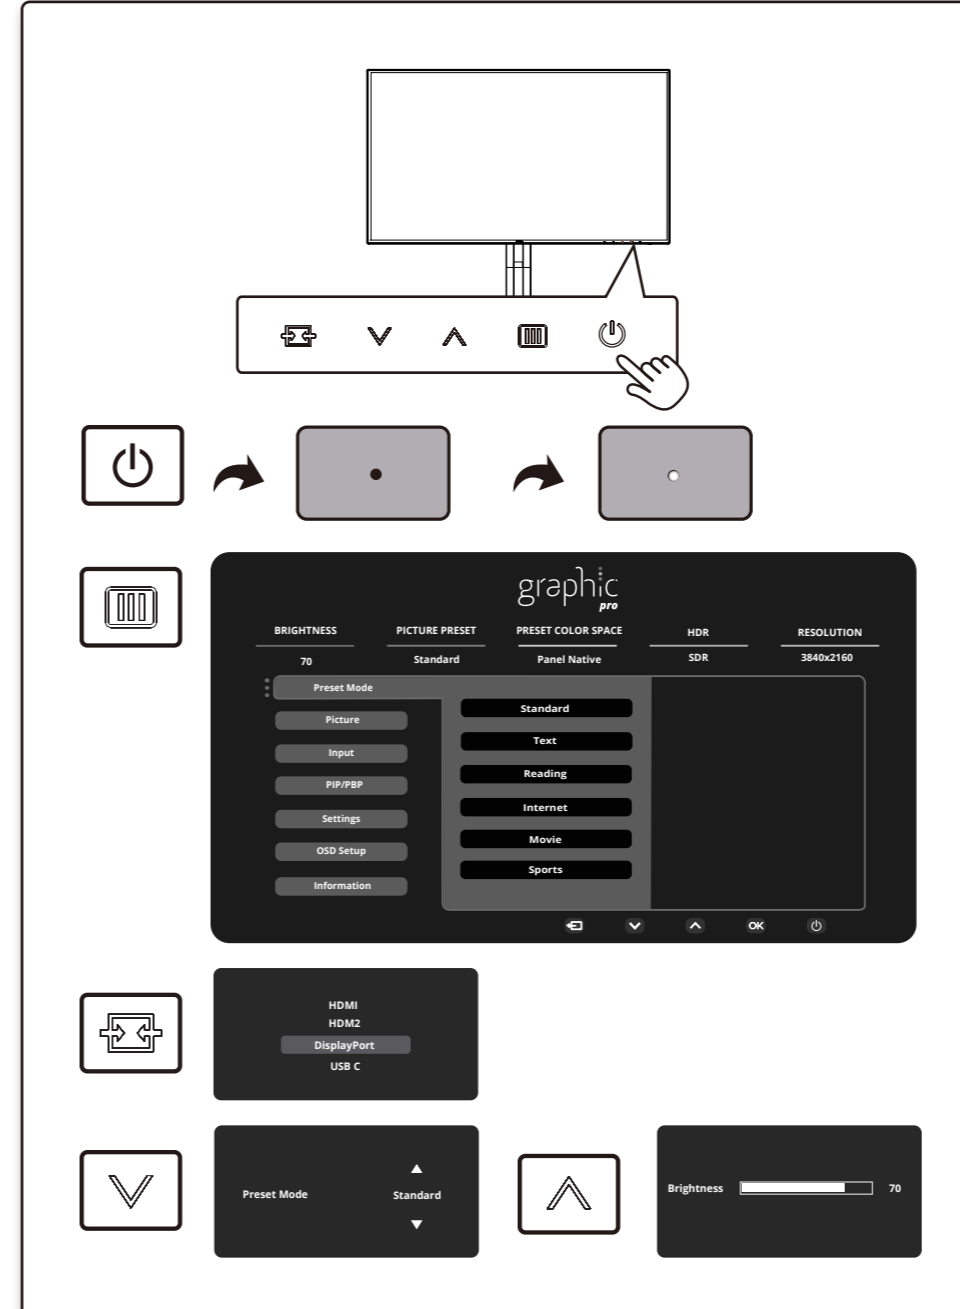

4

General Specification

| | | | |
|--------------------------|-------------------------------|---|--------------------------|
| Panel | Model Name | U27U3CV | |
| | Driving System | TFT Color LCD | |
| | Viewable Image Size | 68.5cm diagonal (27" Wide Screen) | |
| | Pixel Pitch | 0.1554mm(H) x 0.1554mm(V) | |
| Others | Horizontal Scan Range | 30k~140kHz | |
| | Horizontal Scan Size(Maximum) | 596.736mm | |
| | Vertical Scan Range | 23-75Hz | |
| | Vertical Scan Size(Maximum) | 335.664mm | |
| | Max Resolution | 3840x2160@60Hz | |
| | Plug & Play | VESA DDC2B/CI | |
| | Power Source | 100-240V~ 50/60Hz 3.0A | |
| Physical Characteristics | Power Consumption | Typical (default brightness and contrast) | 44W |
| | | Max. (brightness =100, contrast =100) | ≤ 206W |
| | | Standby mode | ≤ 0.3W |
| | Dimensions(with stand) | 612.7 x (401.3~543.6) x238.4mm (WxHxD) | |
| Environmental | Net Weight | 6.54kg | |
| | Connector Type | HDMIx2, DisplayPort, RJ-45, Earphone, USB C1: Video,PD 96W, USB C2: Upstream, USB C (Side): Power supply up to 15W, USB-Ax4 (include 1 fast charge) | |
| | Signal Cable Type | Detachable | |
| Environmental | Built-In Speaker | 3Wx2 | |
| | Temperature | Operating | 0°C~40°C |
| | | Non-Operating | -25°C~55°C |
| | Humidity | Operating | 10%~85% (non-condensing) |
| | | Non-Operating | 5%~93% (non-condensing) |
| Altitude | Operating | 0m~5000m (0ft~ 16404ft) | |
| | Non-Operating | 0m~12192m (0ft~ 40000ft) | |