




## PG-U32/FF

USB 3.2 GEN-2 Full Featured USB-C (F) to  
USB-C (M) Cable

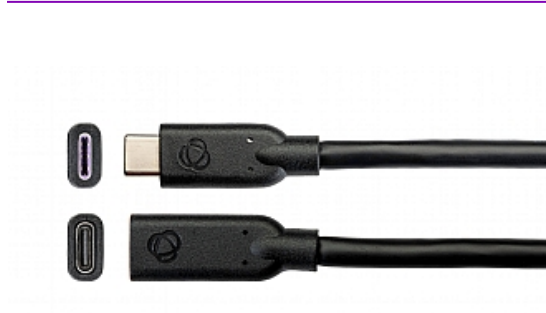

PG-U32/FF is a USB-C(F) to USB-C(M), USB 3.2 Gen-2 SuperSpeed+ cable adaptor offering a whole new level of reliable connectivity thanks to Kramer's unique cable construction providing flexibility and our popular K-lock (on the male side). Transfer Video 4K@60 4:4:4, data at incredible speeds (10G), high-rate charging (100W), – all with just one Passive cable adapter.

Using the PG-U32/FF adapter eliminates the need to replace the entire cable due to excessive use. Its compact connector and flexible cable make it particularly suitable for tight installations

## FEATURES

**Quality Construction** - Triple shielding that helps prevent electromagnetic interference and ensures reliable data communication

**Reversible USB Type-C Connector** with integrated locking mechanism

**Video 4K@60 4:4:4 (DP Alt mode)**

**Transfer Rates** - Up to 10Gbps, USB 3.2 Gen 2

**USB 2.0**

**100W power (5A, 20V)**

**PC, Mac & Mobile Compatible**

**Plug and Play** - For monitors, Web cameras, printers, scanners, keyboards and other digital devices

**USB Backward Compatibility** - 1.0, 1.1, 2.0 and 3.0

**Logo on mold as orientation mark** - See the [Why USB-C Is More Than Just a Connector: Understanding Directionality](#) article in the Resources tab



## TECHNICAL SPECIFICATIONS

---

|                      |  |
|----------------------|--|
| OVERALL              | Type: USB 3.2 GEN-2<br>Video 4K@60 4:4:4 (DP Alt Mode)<br>USB 3.2 Gen 2 10Gbps<br>USB 2.0 480Gbps<br>ETH Support: 10/100/1000 Mbps   |
| PHYSICAL             | Connector A: USB Type-C Male Nickel plated K-Lock connector with gold pins<br>Connector A Length x Width x Height: 30x12.2x3.4mm<br>Connector B: USB Type-C Female Nickel plated K-Lock connector with gold pins<br>Connector B Length x Width x Height: 34x12.2x6.4mm |
| JACKET               | Material: PVC<br>Color: Black<br>Diameter 4.2 ±0.2mm<br>Bending Radius: 25.2   |
| ELECTRICAL           | Temperature Rating: 80°C<br>Voltage Rating: 30V  |
| STANDARDS COMPLIANCE | Safety: CE<br>Flammability Rating: VW-1  |