


Basic PDU

PE0118S/PE0218S/PE0116S/PE0216S/PE0224S/PE0316S/PE0324S/ PE0316B/PE0324B Series

ATEN's Basic PDU family is extended with 0U/1U members containing 16/18/24 outlets and available in IEC or NEMA socket configurations. The compact aluminum housing gives a sleek, yet robust look while minimizing installation space for work space efficiency. Thanks to the built-in surge protection module (not for PE0316B/PE0324B), the IT devices connected to the PDU are well-protected from sudden surges in electricity. Plus, the equipment downtime is reduced as a result of the overcurrent protection design. The Basic PDUs are tailored made for individuals who are in need of industrial-grade, easy-to-deploy power distribution unit in data centers, server rooms, and network wiring closets.

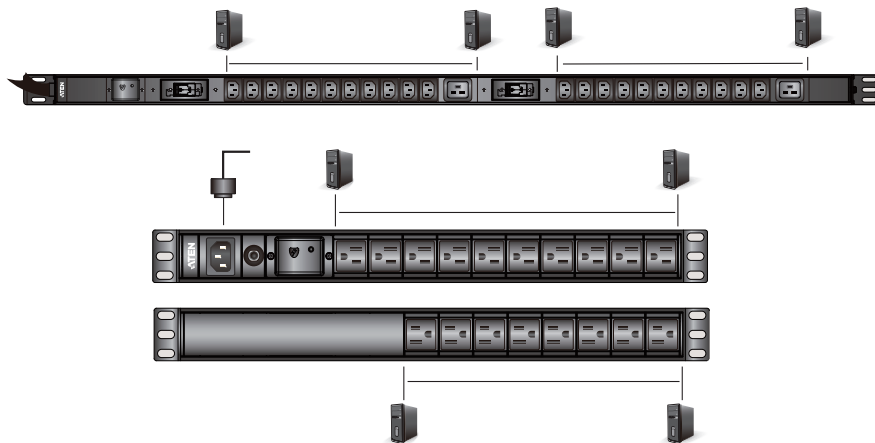

Note: (1) As there are many Basic PDUs, PE0324S (top) and PE0118S (bottom) are the respective 0U and 1U examples used here.

(2) For safety reasons, the equipment should be installed near the wall socket outlet and the disconnected device (appliance coupler on detachable power supply cord or plug on nondetachable power supply cord) should be readily accessible.

Features

Basic PDU

- Space saving — 0U/1U rack mount design
- IEC or NEMA outlet models
- Overcurrent protection
- Surge protection (not for PE0316B/PE0324B)
- Aluminum material

Typical Applications

- Servers
- Network devices
- Telecom equipment

Specifications

	PE0118SA	PE0118SG
Electrical		
Nominal Input Voltage	100-120 VAC	100-240 VAC
Maximum Input Current	15A Max; (UL de-rated 12A Max)	10A (Max)
Input Frequency	50-60 Hz	50-60 Hz
Input Connection	NEMA 5-15P	IEC 60320 C14
Input Power	1800VA (Max); 1440VA (UL de-rated)	2400VA (Max)
Outlet Type	(18) NEMA 5-15R	(18) IEC 60320 C13
Maximum Output Current (Outlet)	15A (Max);12A (UL de-rated); 10A (PSE)	10A (Max)
Maximum Output Current (Bank)	15A (Max); 12A (UL de-rated)	10A (Max)
Maximum Output Current (Total)	15A (Max); 12A (UL de-rated)	10A (Max)
OPD(Overcurrent Protection Device)	Yes	Yes
Environmental		
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m	3000m
Physical Properties		
Dimensions (L x W x H)	48.20 x 4.44 x 9.05 cm (18.98 x 1.75 x 3.56 in.)	48.20 x 4.44 x 9.05 cm (18.98 x 1.75 x 3.56 in.)
Weight	1.22 kg (2.69 lb)	1.22 kg (2.69 lb)
Power Cord Length	10ft (14#)	10ft (3x1.0mm ²)
Compliance		
EMC Verification	FCC Class A	CE Class A
Safety Verification	By Request	CE,LVD

PE0118SA Front View



PE0118SA Rear View



Specifications

	PE0218SA	PE0218SB	PE0218SG
Electrical			
Nominal Input Voltage	100-120 VAC	100-240 VAC	100-240 VAC
Maximum Input Current (UL de-rated 16A Max)	20A (Max); 16A (UL de-rated)	20A (Max); 16A (UL de-rated)	16A (Max)
Input Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Input Connection	For A Plug: NEMA L5-20P; For A2 Plug: NEMA 5-20P	NEMA L6-20P	IEC 60320 C20
Input Power	2400VA (Max); 1920VA (UL de-rated)	4800VA (Max); 3840VA (UL de-rated)	3840VA (Max)
Outlet Type	(18) NEMA 5-20R	(18) IEC 60320 C13	(17) IEC 60320 C13, (1) IEC 60320 C19
Maximum Output Current (Outlet)	20A (Max); 16A (UL de-rated)	15A (Max); 12A (UL de-rated)	C13: 10A (Max) C19: 16A (Max)
Maximum Output Current (Bank)	20A (Max); 16A (UL de-rated)	20A (Max); 16A (UL de-rated)	16A (Max)
Maximum Output Current (Total)	20A (Max); 16A (UL de-rated)	20A (Max); 16A (UL de-rated)	16A (Max)
OPD (Overcurrent Protection Device)	Yes	Yes	Yes
Environmental			
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m	3000m	3000m
Physical Properties			
Dimensions (L x W x H)	48.20 x 4.44 x 9.05 cm (18.98 x 1.75 x 3.56 in.)	48.20 x 4.44 x 9.05 cm (18.98 x 1.75 x 3.56 in.)	48.20 x 4.44 x 9.05 cm (18.98 x 1.75 x 3.56 in.)
Weight	1.26 kg (2.78 lb)	1.26 kg (2.78 lb)	1.26 kg (2.78 lb)
Power Cord Length	10ft (12#)	10ft (12#)	10ft (3x1.5mm ²)
Compliance			
EMC Verification	FCC Class A	FCC Class A	CE Class A
Safety Verification	By Request	By Request	CE,LVD

PE0218SA Front View



PE0218SA Rear View



Specifications

	PE0116SA	PE0116SG
Electrical		
Nominal Input Voltage	100-120 VAC	100-240 VAC
Maximum Input Current	15A (Max); 12A (UL de-rated)	10A (Max)
Input Frequency	50-60 Hz	50-60 Hz
Input Connection	NEMA 5-15P	IEC 60320 C14
Input Power	1800VA (Max); 1440VA (UL de-rated)	2400VA (Max)
Outlet Type	(16) NEMA 5-15R	(16) IEC 60320 C13
Maximum Output Current (Outlet)	15A (Max); 12A (UL de-rated); 10A (PSE)	10A (Max)
Maximum Output Current (Bank)	15A (Max); 12A (UL de-rated)	10A (Max)
Maximum Output Current (Total)	15A (Max); 12A (UL de-rated)	10A (Max)
OPD(Overcurrent Protection Device)	Yes	Yes
Environmental		
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m	3000m
Physical Properties		
Dimensions (L x W x H)	71.56 x 4.44 x 6.00 cm (28.17 x 1.75 x 2.36 in.)	71.56 x 4.44 x 6.00 cm (28.17 x 1.75 x 2.36 in.)
Weight	1.10 kg (2.42 lb)	1.10 kg (2.42 lb)
Power Cord Length	10ft (14#)	10ft (3x1.0mm ²)
Compliance		
EMC Verification	FCC Class A	CE Class A
Safety Verification	By Request	CE,LVD

PE0116SA Front View



Specifications

	PE0216SA	PE0216SB	PE0216SG
Electrical			
Nominal Input Voltage	100-120 VAC	100-240 VAC	100-240 VAC
Maximum Input Current	20A (Max); 16A (UL de-rated)	20A (Max); 16A (UL de-rated)	16A Max
Input Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Input Connection	For A Plug: NEMA L5-20P For A2 Plug: NEMA 5-20P	NEMA L6-20P	IEC 60320 C20
Input Power	2400VA (Max); 1920VA (UL de-rated)	4800VA (Max); 3840VA (UL de-rated)	3840VA (Max)
Outlet Type	(16) NEMA 5-20R	(16) IEC 60320 C13	(16) IEC 60320 C13
Maximum Output Current (Outlet)	20 Max; (UL de-rated 16A Max)	15A Max; (UL de-rated 12A Max)	10A (Max)
Maximum Output Current (Bank)	20 Max; (UL de-rated 16A Max)	20A Max; (UL de-rated 16A Max)	16A (Max)
Maximum Output Current (Total)	20A Max; (UL de-rated 16A Max)	20A Max; (UL de-rated 16A Max)	16A (Max)
OPD (Overcurrent Protection Device)	Yes	Yes	Yes
Environmental			
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m	3000m	3000m
Physical Properties			
Dimensions (L x W x H)	71.56 x 4.44 x 6.00 cm (28.17 x 1.75 x 2.36 in.)	71.56 x 4.44 x 6.00 cm (28.17 x 1.75 x 2.36 in.)	71.56 x 4.44 x 6.00 cm (28.17 x 1.75 x 2.36 in.)
Weight	1.10 kg (2.42 lb)	1.10 kg (2.42 lb)	1.10 kg (2.42 lb)
Power Cord Length	10ft (12#)	10ft (12#)	10ft (3×1.5mm ²)
Compliance			
EMC Verification	FCC Class A	FCC Class A	CE Class A
Safety Verification	By Request	By Request	CE,LVD

PE0216SA Front View



Specifications

	PE0224SA	PE0224SB	PE0224SG
Electrical			
Nominal Input Voltage	100-120 VAC	100-240 VAC	100-240 VAC
Maximum Input Current	20A (Max);16A (UL de-rated)	20A (Max);16A (UL de-rated)	16A (Max)
Input Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Input Connection	For A plug: NEMA L5-20P; For A2 plug: NEMA 5-20P	NEMA L6-20P	IEC 60320 C20
Input Power	2400VA (Max); 1920VA (UL de-rated)	4800VA (Max); 3840VA (UL de-rated)	3840VA (Max)
Outlet Type	(24) NEMA 5-20R	(22) IEC 60320 C13, (2) IEC 60320 C19	(22) IEC 60320 C13, (2) IEC 60320 C19
Maximum Output Current (Outlet)	20A (Max); 16A (UL de-rated)	C13: 15A(Max); 12A(UL de-rated) C19: 20A(Max); 16A(UL de-rated)	C13: 10A (Max) C19: 16A (Max)
Maximum Output Current (Bank)	20A (Max); 16A (UL de-rated)	20A (Max); 16A (UL de-rated)	16A (Max)
Maximum Output Current (Total)	20A (Max); 16A (UL de-rated)	20A (Max); 16A (UL de-rated)	16A (Max)
OPD (Overcurrent Protection Device)	Yes	Yes	Yes
Environmental			
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m	3000m	3000m
Physical Properties			
Dimensions (L x W x H)	96.71 x 4.44 x 6.00 cm (38.07 x 1.75 x 2.36 in.)	108.71 x 4.44 x 6.00 cm (42.80 x 1.75 x 2.36 in.)	108.71 x 4.44 x 6.00 cm (42.80 x 1.75 x 2.36 in.)
Weight	1.40 kg (3.08 lb)	1.40 kg (3.08 lb)	1.40 kg (3.08 lb)
Power Cord Length	10ft (12#)	10ft (12#)	10ft (3x1.5mm ²)
Compliance			
EMC Verification	FCC Class A	FCC Class A	CE Class A
Safety Verification	By Request	By Request	CE,LVD

PE0224SA Front View



Specifications

	PE0316SA	PE0316SG
Electrical		
Nominal Input Voltage	100-120 VAC	100-240 VAC
Maximum Input Current	30A (Max); 24A (UL de-rated)	32A (Max)
Input Frequency	50-60 Hz	50-60 Hz
Input Connection	NEMA L5-30P	IEC 60309 32A
Input Power	3600VA(Max); 2880VA(UL de-rated)	7680VA(Max)
Outlet Type	(16) NEMA 5-20R	(16) IEC 60320 C13
Maximum Output Current (Outlet)	20A (Max); 16A (UL de-rated)	10A (Max)
Maximum Output Current (Bank)	20A (Max); 16A (UL de-rated)	16A (Max)
Maximum Output Current (Total)	30A (Max); 24A (UL de-rated)	32A (Max)
OPD (Overcurrent Protection Device)	Yes	Yes
Environmental		
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m	3000m
Physical Properties		
Dimensions (L x W x H)	96.71 x 4.44 x 6.00 cm (38.07 x 1.75 x 2.36 in.)	96.71 x 4.44 x 6.00 cm (38.07 x 1.75 x 2.36 in.)
Weight	2.10 kg (4.63 lb)	2.10 kg (4.63 lb)
Power Cord Length	10ft (10#)	10ft (3x4mm ²)
Compliance		
EMC Verification	FCC Class A	CE Class A
Safety Verification	By Request	CE,LVD

PE0316SA Front View



Specifications

	PE0324SA	PE0324SG
Electrical		
Nominal Input Voltage	100-120 VAC	100-240 VAC
Maximum Input Current	30A(Max); 24A (UL de-rated)	32A Max
Input Frequency	50-60 Hz	50-60 Hz
Input Connection	NEMA L5-30P	IEC 60309 32A
Input Power	3600VA (Max); 2880VA (UL de-rated)	7680VA (Max)
Outlet Type	(24) NEMA 5-20R	(22) IEC 60320 C13, (2) IEC 60320 C19
Maximum Output Current (Outlet)	20A (Max); 16A (UL de-rated)	C13: 10A (Max) C19: 16A (Max)
Maximum Output Current (Bank)	20A (Max); 16A (UL de-rated)	16A (Max)
Maximum Output Current (Total)	30A (Max); 24A (UL de-rated)	32A (Max)
OPD (Overcurrent Protection Device)	Yes	Yes
Environmental		
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m	3000m
Physical Properties		
Dimensions (L x W x H)	120.71 x 4.44 x 6.00 cm (47.52 x 1.75 x 2.36 in.)	132.71 x 4.44 x 6.00 cm (52.25 x 1.75 x 2.36 in.)
Weight	2.40 kg (5.29 lb)	2.40 kg (5.29 lb)
Power Cord Length	10ft (10#)	10ft (3x4mm ²)
Compliance		
EMC Verification	FCC Class A	CE Class A
Safety Verification	By Request	CE,LVD

PE0324SA Front View



Specifications

PE0316B	
Electrical	
Nominal Input Voltage	100 – 240 VAC
Maximum Input Current	30A (Max); 24A (UL de-rated)
Input Frequency	50-60 Hz
Input Connection	NEMA L6-30P
Input Power	7200VA (Max); 5760VA (UL de-rated)
Outlet Type	(16) IEC 60320 C13
Maximum Output Current (Outlet)	15A (Max); 12A (UL de-rated)
Maximum Output Current (Bank)	20A (Max); 16A (UL de-rated)
Maximum Output Current (Total)	30A (Max); 24A (UL de-rated)
OPD (Overcurrent Protection Device)	Yes
Environmental	
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m
Physical Properties	
Dimensions (L x W x H)	96.71 x 4.44 x 6.0 cm (38.07 x 1.75 x 2.36 in.)
Weight	2.50 kg (5.51 lb)
Power Cord Length	10ft (10#)
Compliance	
EMC Verification	FCC Class A
Safety Verification	By Request

PE0316B Front View



Specifications

PE0324B	
Electrical	
Nominal Input Voltage	100 – 240 VAC
Maximum Input Current	30A (Max); 24A (UL de-rated)
Input Frequency	50-60 Hz
Input Connection	NEMA L6-30P
Input Power	7200VA (Max); 5760VA (UL de-rated)
Outlet Type	(22) IEC 60320 C13, (2) IEC 60320 C19
Maximum Output Current (Outlet)	C13: 15A (Max); 12A (UL de-rated) C19: 20A (Max); 16A (UL de-rated)
Maximum Output Current (Bank)	20A (Max); 16A (UL de-rated)
Maximum Output Current (Total)	30A (Max); 24A (UL de-rated)
OPD (Overcurrent Protection Device)	Yes
Environmental	
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m
Physical Properties	
Dimensions (L x W x H)	120.71 x 4.44 x 6.0 cm (47.52 x 1.75 x 2.36 in.)
Weight	2.80 kg (6.17 lb)
Power Cord Length	10ft (10#)
Compliance	
EMC Verification	FCC Class A
Safety Verification	By Request

PE0324B Front View



ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Publish Date: 02/2021 V1.0

© Copyright 2021 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.

