
Overview

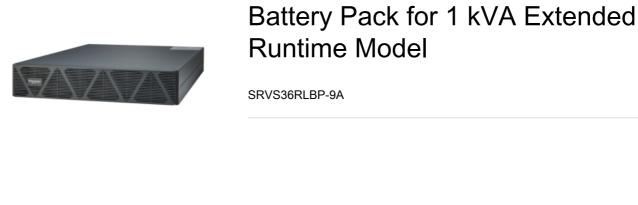

Easy UPS On-Line SRVS 36V RM

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Lead time	Usually in Stock
Main	
Number of rack unit	2U
Battery type	Lead-acid battery
Provided equipment	User manual Battery cable Rack mounting brackets
Physical	
Colour	Black
Height	8.6 cm
Width	43.8 cm
Depth	41.2 cm
Net weight	21 kg
Mounting mode	Rack-mounted with kit
Conformance	
Product certifications	CE UKCA EAC EN/IEC 62040-1
Environmental	
Ambient air temperature for operation	040 °C
Relative humidity	095 % non-condensing
Operating altitude	03000 m
Ambient air temperature for storage	-1540 °C
Storage Relative Humidity	095 % non-condensing
Storage altitude	015000 m

Batteries & Runtime

Number of battery blocks per string	3
Device mounting	Rack mount
Number of battery filled slots	0
Number of battery free slots	0
Battery voltage	36 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	24 cm
Package 1 Width	50 cm
Package 1 Length	60 cm
Package 1 Weight	24.149 kg
Unit Type of Package 2	PAM
Number of Units in Package 2	16
Package 2 Height	108.6 cm
Package 2 Width	100 cm
Package 2 Length	120 cm
Package 2 Weight	427.4 kg

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	2 years repair or replace
· · · · · · · · · · · · · · · · · · ·	=)

Recommended replacement(s)