



by Schneider Electric

Switched Rack PDU AP7950B


Overview

The APC by Schneider Electric Switched Rack Power Distribution Unit (PDU) distributes power to devices in the rack. It has a sensor that measures the current used by the PDU and its attached devices. It can be monitored through Web, Telnet, SNMP, SSH, or StruxureWare Data Center Expert[®] interfaces.

Outlets: The outlets connect the Rack PDU to equipment in your rack or enclosure. Each outlet allows independent control of the connected equipment and the Rack PDU firmware also provides Outlet User accounts. Sixteen (16) IEC 320 C13 outlets.

Digital display: A digital display shows aggregate current being used by the Rack PDU and its attached devices.

Power cord: The 10 ft (3.05 m) power cord terminates with a IEC 320-C14 connector.

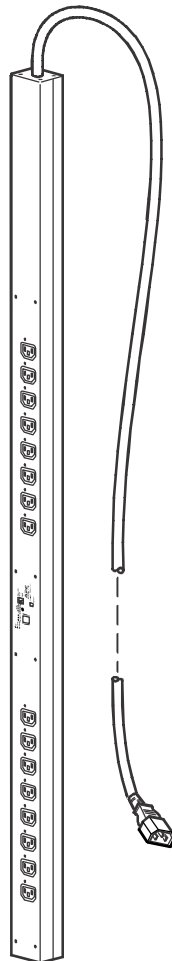

Specifications

Electrical	
Nominal input voltage	230 V
Acceptable input voltage	± 10% Nominal input voltage
Maximum total current draw	32 A
Input frequency	50 - 60 Hz
Cord length	10 ft (3.05 m)
Input connector	IEC-320-C14
Output connectors	Sixteen IEC 320 C13 outlets
Physical	
Size (H x W x D)	124.46 x 5.56 x 4.39 cm (49.00 x 2.19 x 1.73 in)
Shipping (H x W x D)	213.36 x 15.24 x 12.7 cm (84.00 x 6.00 x 5.00 in)
Weight	9.5 lb (4.3 kg)
Shipping weight	11.5 lb (5.2 kg)
Environmental	
Elevation (above MSL)	
Operating	0–15 000 ft (0–4500 m)
Storage	0–50 000 ft (0–15 000 m)
Temperature	
Operating	–5 to 45° C (23 to 115° F)
Storage	–25 to 65° C (–13 to 149° F)
Humidity	
Operating	5–95% RH, Non-condensing
Storage	5–95% RH, Non-condensing
Compliance	
Safety	VDE, CE, EAC
EMC	EN55022, EN55024, AS/NZS CISPR 22

Customer support and warranty information are available on the website, www.apc.com.

© 2016 APC by Schneider Electric. All rights reserved.

990-5833-001
10/2016