



POLY Blackwire 5210 Monaural USB-A Headset (Bulk)

Brand : POLY

Product code: 80R98A6

Product name : Blackwire 5210 Monaural USB-A Headset (Bulk)

- When you can hear and be heard clearly, you get more work done. Tune out the inevitable workplace distractions with a headset full of features – soft, conforming ear cushions that provide passive noise canceling and a precisely tuned microphone masks nearby conversations.

- Your ears will thank you, especially after long conference calls. This headset is built to stay comfortable. Adjust it to fit the way you work. Need to move locations? The headset folds up for easy portability in the carrying case.

Blackwire 5210 Monaural USB-A Headset (Bulk)

[POLY Blackwire 5210 Monaural USB-A Headset \(Bulk\):](#)

Wear it well

The Blackwire 5200 Series fits your busy workday. Ergonomically designed for long lasting comfort. And with the easy-to-use connectivity you can work on a variety of devices throughout the day.


POLY Blackwire 5210 Monaural USB-A Headset (Bulk). Product type: Headset. Connectivity technology: Wired. Recommended usage: Office/Call center, Cable length: 2.17 m. Weight: 87 g. Product colour: Black



Performance		Microphone	
Product type *	Headset	Microphone type *	Boom
Recommended usage *	Office/Call center	Microphone frequency	100 - 10000 Hz
Headset type	Monaural	Microphone sensitivity	-38 dB
Product colour *	Black	Microphone direction type	Omnidirectional
Operating keys	Answer/end call, Mute, Volume +, Volume -	System requirements	
Volume control	Button	Windows operating systems supported	✓
Control unit type	In-line control unit	Weight & dimensions	
Cable length	2.17 m	Width	155 mm
Cable colour	Red	Depth	32 mm
Signal-to-Noise Ratio (SNR)	118 dB	Height	178 mm
Hearing protection technologies	SoundGuard DIGITAL	Weight	87 g
Ports & interfaces		Packaging data	
Connectivity technology *	Wired	Package width	185 mm
3.5 mm connector	✓	Package depth	56 mm
USB connectivity	✓	Package height	207 mm
USB connector	USB Type-A	Package weight	250 g
Headphones		Packaging content	
Ear coupling *	Supraaural	Quick start guide	✓
Impedance	32 Ω	Warranty card	✓
Headphone sensitivity	90 dB	Carrying case	✓
Driver unit	2.8 cm	Ear pad material	Leatherette
Driver type	Dynamic		

Technical details

Warranty period	2 year(s)
-----------------	-----------

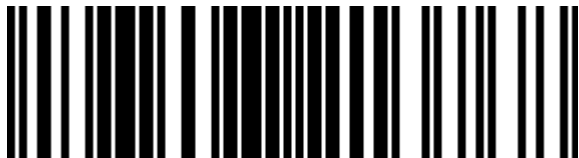

0197497213768



197497213768

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 25-DEC-2024. Prints or copies of Information are only valid on the printed Publication date