POLY Trio 8800 IP Conference Phone and PoE-enabled

Brand : POLY

Product code: 849A7AA

Product name : Trio 8800 IP Conference Phone and PoE-enabled

- Catch every word and enjoy inflection without distracting background noise with Poly Acoustic Clarity technology.
- Collaborate using audio, video, content, or all three. The Trio 8800 conference phone helps teams make decisions faster thanks to their choice of meeting preferences.
- Connect to the platform you like best — or choose more than one with Poly hybrid registration.
Trio 8800 IP Conference Phone and PoE-enabled

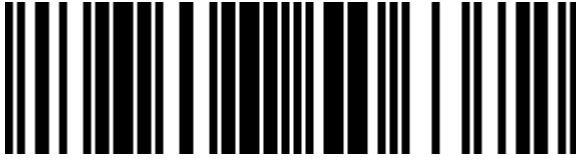POLY Trio 8800 IP Conference Phone and PoE-enabled:

Big room. Vast possibilities
Transform your large meeting rooms into havens of productive collaboration. With up to 20 ft/6 m of pickup range, quality audio, and Poly NoiseBlockAI technology, you can ensure the flow of ideas is uninterrupted.
POLY Trio 8800 IP Conference Phone and PoE-enabled. Product type: IP conference phone, Product colour: Black, Display diagonal: 12.7 cm (5"). USB connector type: Micro-USB B, USB Type-A. Sustainability certificates: ENERGY STAR. Width: 383 mm, Depth: 75 mm, Height: 332 mm. Cables included: LAN (RJ-45), USB
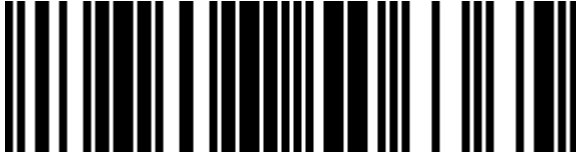
Features

Product type *	IP conference phone
Product colour	Black
Built-in display *	✔
Display diagonal	12.7 cm (5")
Display resolution	720 x 1280 pixels
Voice codecs	G.711alaw, G.711ulaw, G.719, G.722, G.722.1, G.722.1C, G.729ab, OPUS, iLBC
Number of microphone arrays	3
Wi-Fi	✔
Top Wi-Fi standard	Wi-Fi 4 (802.11n)
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n)
Bluetooth	✔
Bluetooth version	4.2
Ethernet interface type	Gigabit Ethernet
Ethernet LAN data rates	10,100,1000 Mbit/s
Networking standards	IEEE 802.3af, IEEE 802.3at
Power over Ethernet (PoE)	✔
Built-in speaker(s) *	✔
Number of speakers	1

Ports & interfaces

RJ-45 ports quantity	2
USB port	✔
USB version	2.0

Ports & interfaces

USB connector type	Micro-USB B, USB Type-A
USB ports quantity	2

Sustainability

Sustainability certificates	ENERGY STAR

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 70 °C
Operating relative humidity (H-H)	5 - 95%

Weight & dimensions

Width	383 mm
Depth	75 mm
Height	332 mm
Weight	950 g
Package width	483 mm
Package depth	115 mm
Package height	394 mm
Package weight	2.2 kg

Packaging content

Cables included	LAN (RJ-45), USB

Logistics data

Country of origin	Laos, Mexico

0197497506372

197497506372

0197497506365

197497506365
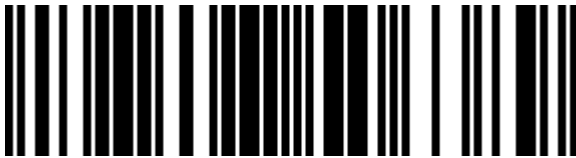
0197497506389

197497506389