



APC Smart-UPS RT 3000VA, 230V, 8x IEC 60320 C13 & 3x IEC Jumpers & 2x IEC 60320 C19

Brand : APC

Product code: SURT3000XLIX554

Product name : Smart-UPS RT 3000VA, 230V, 8x IEC 60320 C13 & 3x IEC Jumpers & 2x IEC 60320 C19



Smart-UPS RT 3000VA, 230V, 8x IEC 60320 C13 & 3x IEC Jumpers & 2x IEC 60320 C19


APC Smart-UPS RT 3000VA, 230V, 8x IEC 60320 C13 & 3x IEC Jumpers & 2x IEC 60320 C19:

High density, double-conversion on-line power protection with scalable runtime.

APC Smart-UPS RT 3000VA, 230V, 8x IEC 60320 C13 & 3x IEC Jumpers & 2x IEC 60320 C19. UPS topology: Double-conversion (Online), Output power capacity: 3 kVA, Output power: 2100 W. AC outlet types: C13 coupler, C19 coupler, IEC Jumpers, AC outlets quantity: 13 AC outlet(s), Serial interface type: RS-232. Battery technology: Sealed Lead Acid (VRLA), Battery recharge time: 2.5 h, Replacement battery cartridge: APCRBC140. Form factor: Rackmount/Tower, Cable length: 2.4 m, Certification: EN/IEC 62040-1-1, EN/IEC 62040-2, GOST, VDE. Width: 130 mm, Depth: 660 mm, Height: 432 mm

Features		Battery	
UPS topology *	Double-conversion (Online)	Hot-swap battery	✓
Output power capacity *	3 kVA	Automatic battery test	✓
Output power *	2100 W	Cold start	✓
Waveform *	Sine	Replacement battery cartridge	APCRBC140
Input operation voltage (min) *	160 V	Design	
Input operation voltage (max) *	280 V	Form factor *	Rackmount/Tower
Input frequency *	40/70 Hz	Cable length	2.4 m
Output operation voltage (min)	220 V	LED indicators	✓
Output operation voltage (max)	240 V	Certification	EN/IEC 62040-1-1, EN/IEC 62040-2, GOST, VDE
Output frequency	50/60 Hz	Operational conditions	
Surge energy rating	480 J	Operating temperature (T-T)	0 - 40 °C
Efficiency	92%	Storage temperature (T-T)	-15 - 45 °C
Crest factor	3:1	Operating relative humidity (H-H)	0 - 95%
Emergency Power Off (EPO)	✓	Storage relative humidity (H-H)	0 - 95%
Output voltage Total Harmonic Distortion (THD)	3%	Operating altitude	0 - 3048 m
Noise level	55 dB	Non-operating altitude	0 - 15240 m
Surge protection	✓	Technical details	
Audible alarm(s)	✓	Compliance certificates	RoHS
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	Weight & dimensions	
Auto-restart	✓	Width	130 mm
Ports & interfaces		Depth	660 mm
AC outlet types	C13 coupler, C19 coupler, IEC Jumpers	Height	432 mm
AC outlets quantity	13 AC outlet(s)	Weight	54.7 kg
USB port	✓	Package width	603 mm
Serial interface	✓	Package depth	980 mm
		Package height	347 mm

Ports & interfaces		Weight & dimensions	
Serial interface type	RS-232	Package weight	63.6 kg
SmartSlot	✓	Packaging data	
Battery		Cables included	RS-232
Battery technology	Sealed Lead Acid (VRLA)	Manual	✓
Battery recharge time	2.5 h	Logistics data	
		Harmonized System (HS) code	85078000

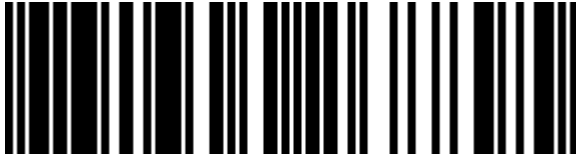

0731304268895



731304268895

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.