

2K-0008 2-in-1U Mounting Plate

Installation Guide



MISC10000068 03/2025 V1.0


Package Contents

Qty	Description
1	2K-0008 2-in-1U Mounting Plate
4	cable ties
1	M3*5 flathead screw set (4 pcs)
1	user instructions


Installing the 2K-0008 with 2K-0001 and 2K-0002

- From the 2K-0001 / 2K-0002 package, locate the hind KVM stabilizing set (4 rack ears) and 8 M3*5 flathead screws, and then attach the rack ears to the mounting plate using the 8 M3*5 flathead screws.
 - First remove the screws from the bottom of the device you want to install as illustrated below in this step. Attach the device you want to secure on the mounting plate using the screws you removed or the provided M3*5 flathead screws. The number of screws and the screw holes used may differ depending on the device that you install. The example used for the illustration is KA8270. Please refer to the *Mounting Alignments* in this installation guide for more information.

2K-0001

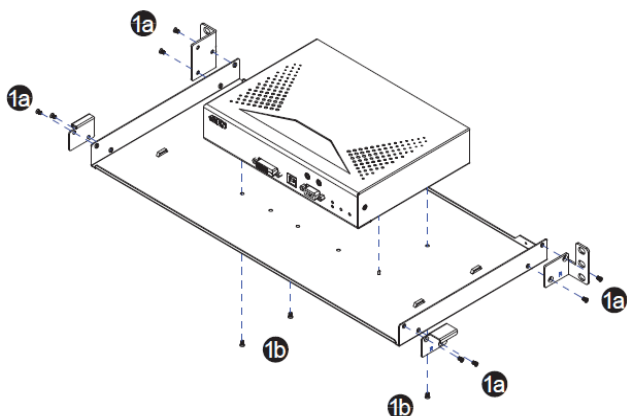


2K-0002

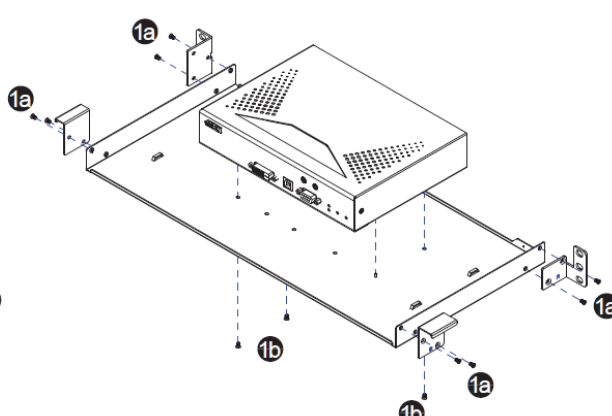


- Screw the rail set to the rack using 2 M4*6 Type I screws from the 2K-0001 / 2K-0002 package.


2K-0001

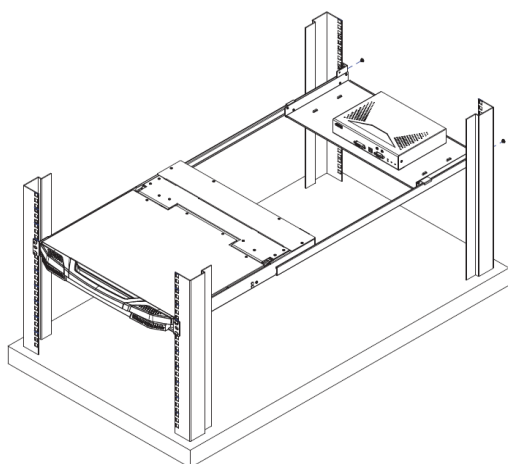

2K-0002

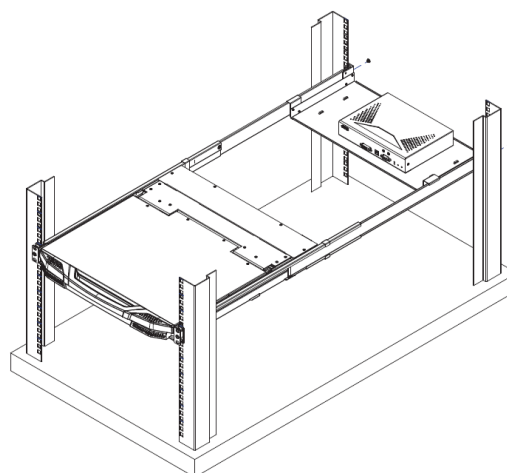



3. (Optional) You can secure the cables with the integrated four cable tie holes on the mounting plate to simplify maintenance or organization via the supplied cable ties.

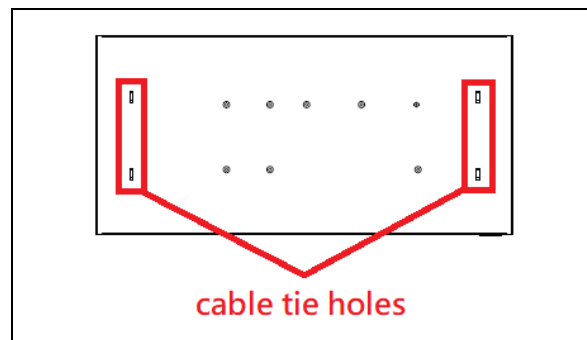



Mounting Alignments

Based on the device series, refer to the corresponding section below for the screw holes and anchor pins used for installation. For a full list of supported devices, visit the 2K-0008 product page.

KA Series (KVM over IP Console Station) Example: KA8270

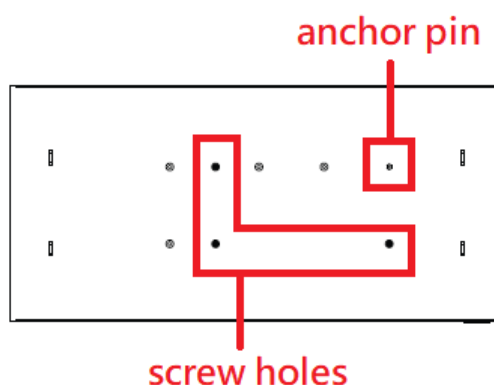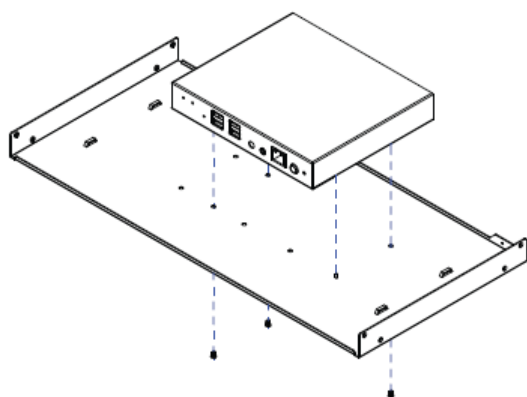

KE Series / KX Series (Transmitter) Example: KE6900AT

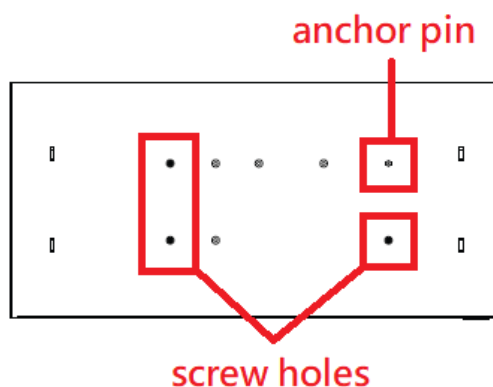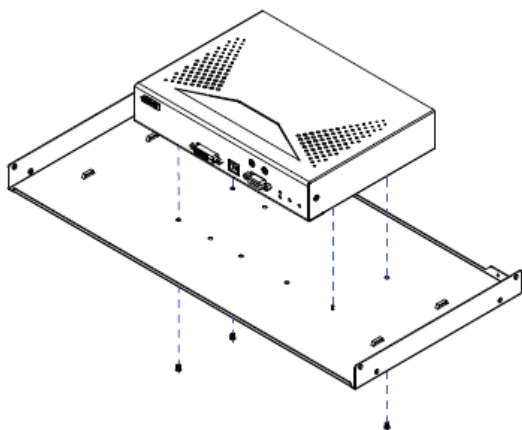

KE Series Slim Version (Transmitter) Example: KE8900ST

