

## ASUS ESC4000-E11 Intel C741 Rack (2U) Silver

**Brand :** ASUS

**Product code:** 90SF02L1-M000T0

**Product name :** ESC4000-E11




2U dual-socket GPU server powered by 5th Gen Intel Xeon Scalable processors that supports four dual-slot GPUs, liquid cooling solution, 16 DIMM, six NVMe, two 2600W Titanium power supplies and ASUS ASMB11-iKVM

ASUS ESC4000-E11. Motherboard chipset: Intel C741, Processor manufacturer: Intel, Processor family: Intel. Supported memory types: DDR5-SDRAM, Supported DIMM module capacities: 16GB, 32GB, 64GB, 128GB, Maximum internal memory: 8 TB. Storage drive sizes supported: 2.5,3.5", Supported storage drive types: HDD & SSD, Supported storage drive interfaces: Serial ATA, Serial Attached SCSI (SAS). Ethernet interface type: Gigabit Ethernet, Ethernet LAN data rates: 10,100,1000 Mbit/s, LAN controller: Intel® I350. Chassis type: Rack (2U), Product colour: Silver

|                                      |  |   |                  |
|--------------------------------------|--|---|------------------|
| <b>Processor</b>                     |  | <b>Network</b>                                  |                  |
| Built-in processor *                 | ✗                                      | LAN controller                                  | Intel® I350      |
| Motherboard chipset *                | Intel C741                             | <b>Ports &amp; interfaces</b>                   |                  |
| Processor manufacturer               | Intel                                  | USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity | 6                |
| Processor family                     | Intel                                  | Ethernet LAN (RJ-45) ports *                    | 3                |
| Number of processors supported *     | 2                                      | VGA (D-Sub) ports quantity                      | 1                |
| <b>Memory</b>                        |  | <b>Expansion slots</b>                          |                  |
| Number of DIMM slots *               | 16                                     | PCI Express x8 slots                            | 1                |
| Supported memory types *             | DDR5-SDRAM                             | PCI Express x16 slots                           | 12               |
| Supported DIMM module capacities     | 16GB, 32GB, 64GB, 128GB                | Number of M.2 (M) slots                         | 1                |
| Maximum internal memory              | 8 TB                                   | <b>Design</b>                                   |                  |
| <b>Storage</b>                       |  | Chassis type *                                  | Rack (2U)        |
| Number of storage drives supported * | 13                                     | Product colour                                  | Silver           |
| Hot-swap HDD bays *                  | ✓                                      | <b>Power</b>                                    |                  |
| Number of 2.5" bays                  | 4                                      | Power supply *                                  | 2600 W           |
| Number of 3.5" bays                  | 8                                      | Number of main power supplies                   | 2                |
| Storage drive sizes supported        | 2.5,3.5"                               | 80 PLUS certification                           | 80 PLUS Titanium |
| Supported storage drive types        | HDD & SSD                              | <b>Operational conditions</b>                   |                  |
| Supported storage drive interfaces   | Serial ATA, Serial Attached SCSI (SAS) | Operating temperature (T-T)                     | 10 - 35 °C       |
| SSD form factor                      | M.2                                    | Storage temperature (T-T)                       | -40 - 70 °C      |
| <b>Network</b>                       |  | Operating relative humidity (H-H)               | 20 - 90%         |
| Ethernet LAN                         | ✓                                      | <b>Weight &amp; dimensions</b>                  |                  |
| Ethernet interface type              | Gigabit Ethernet                       | Width   | 800 mm           |
| Ethernet LAN data rates              | 10,100,1000 Mbit/s                     | Depth   | 439.5 mm         |
|                                      |  | Height  | 88.9 mm          |
|                                      |  | Weight  | 26 kg            |

**Packaging data**

Package weight 36.8 kg

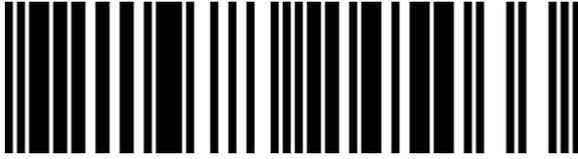

4711387245033

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 21-DEC-2024. Prints or copies of Information are only valid on the printed Publication date